


# Synergy Telecom P Ltd.

## BNC (F) LMR 200 CRIMP:-

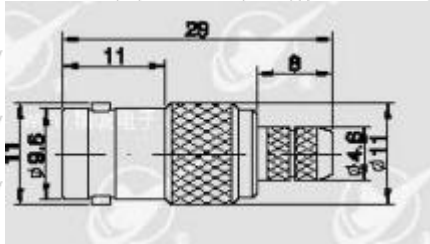

### Electrical Specification

<b>Characteristic Impedance</b>	<b>50 ohm</b>
<b>Frequency Range</b>	<b>DC- 3 GHz</b>
<b>VSWR</b>	<b>&lt;1.2</b>
<b>Contact Resistance</b>	<b>Inner Conductor : &lt; 1.5 m Ω</b> <b>Outer Conductor : &lt; 1.0 m Ω</b>
<b>Dielectric withstanding Voltage</b>	<b>&gt;2500V RMS, 50Hz, At sea Level</b>
<b>Dielectric Resistance</b>	<b>&gt; 5000 M Ω</b>
<b>RoHS</b>	<b>Compliance</b>

### Mechanical

<b>Durability Mating</b>	<b>cycle ≥500</b>
--------------------------	-------------------

### Material Specification

<b>Material</b>	<b>Brass</b>	<b>Plating</b>	<b>White Bronze</b>
<b>Body</b>	<b>Teflon/PTFE</b>	<b>Center Conductor</b>	<b>Gold(AU)</b>

### Environmental

<b>Temperature Range</b>	<b>- 10°C – +55 °C</b>
--------------------------	------------------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India  
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,  
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd