


Synergy Telecom P Ltd.

BNC (F) LMR 240 CRIMP:-

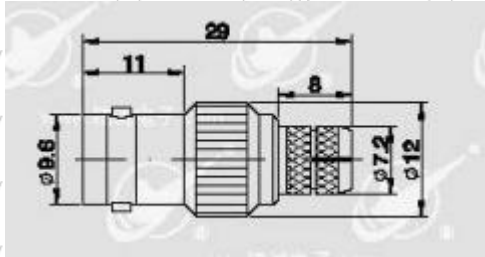

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC- 3 GHz
VSWR	<1.2
Contact Resistance	Inner Conductor : < 1.5 m Ω Outer Conductor : < 1.0 m Ω
Dielectric withstanding Voltage	>2500V RMS, 50Hz, At sea Level
Dielectric Resistance	> 5000 M Ω
RoHS	Compliance

Mechanical

Durability Mating	cycle ≥500
--------------------------	-------------------

Material Specification

	Material	Plating
Body	Brass	White Bronze
Insulator	Teflon/PTFE	
Center Conductor	Phosphor Copper	Gold(AU)

Environmental

Temperature Range	- 10°C – +55 °C
--------------------------	------------------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd
 Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd