


Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd **BNC Male Crimp Connector RG316 Cable (Centre Pin Solder):-** (P) Ltd

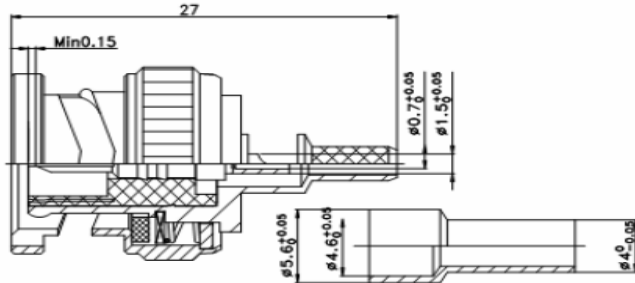

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	<1.2
Contact Resistance	Inner Conductor : < 1.5 m Ω
Dielectric withstanding Voltage	Outer Conductor : < 1.0 m Ω
Dielectric Resistance	>2500V RMS, 50Hz, At sea Level
RoHS	> 5000 M Ω
	Compliance

Mechanical

Durability Mating	cycle ≥500
--------------------------	-------------------

Material Specification

Body	Material	Plating
Insulator	Brass	White Bronze
Center Conductor	Teflon/PTFE	
Ferrule	Phosphor Copper	Gold(AU)
	Annealed copper	Ni

Environmental

Temperature Range	- 10°C – +55 °C
--------------------------	------------------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>