


# Synergy Telecom P Ltd.

## BNC(M)-LMR 400 CRIMP:-

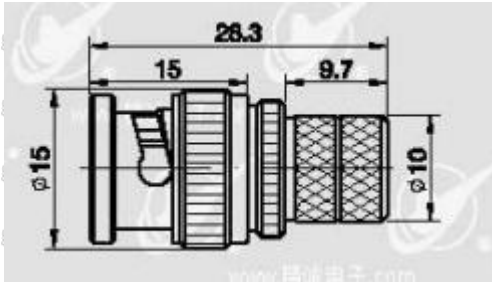

### Electrical Specification

**Characteristic Impedance**

**50 ohm**

**Frequency Range**

**DC- 4 GHz**

**VSWR**

**<1.2**

**Contact Resistance**

**Inner Conductor : < 1.5 m Ω**

**Outer Conductor : < 1.0 m Ω**

**Dielectric withstanding Voltage**

**>2500V RMS, 50Hz, At sea Level**

**Dielectric Resistance**

**>5000 M Ω**

**RoHS**

**Compliance**

### Mechanical

**Durability Mating**

**cycle ≥500**

### Material Specification

**Body**

**Brass**

**White Bronze**

**Insulator**

**Teflon/PTFE**

**Center Conductor**

**Phosphor Copper**

**Gold(AU)**

**Ferrule**

**Annealed copper**

**Ni**

### Environmental

**Temperature Range**

**- 10°C – +55 °C**

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India  
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,  
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd