


PUSHBUTTON ATTENUATORS

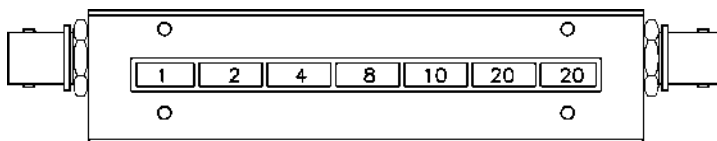


All units have 1 watt average power with 1000 watts stak.

All units have BNC female connectors.

Model No.	FREQUENCY RANGE	IMSTDANCE	ATTENUATION RANGE	ATTENUATION STEPS	ATTENUATION ACCURACY OVERALL	VSWR	P R I C E			
							1-24	25-49	25-49	100 +
ST7008-1	DC-750 MHz	50 OHMS	0-65 dB in 1.0 dB steps	1, 2, 4, 8, 10, 20 & 20 dB	DC-100 MHz, $\pm .3$ dB 100-300 MHz, $\pm .5$ dB 300-500 MHz, $\pm .8$ dB 500-750 MHz, ± 1.3 dB	DC-100 MHz, 1.10:1 MAX 100-500 MHz, 1.25:1 MAX 500-750 MHz, 1.40:1 MAX	\$460.80	\$428.54	\$396.29	\$368.64
ST7008-2	DC-750 MHz	50 OHMS	0-45.5 dB in 0.5 dB steps	0.5, 1, 2, 4, 8, 10 & 20 dB	DC-100 MHz, $\pm .2$ dB 100-300 MHz, $\pm .3$ dB 300-500 MHz, $\pm .5$ dB 500-750 MHz, $\pm .75$ dB	DC-100 MHz, 1.10:1 MAX 100-500 MHz, 1.25:1 MAX 500-750 MHz, 1.40:1 MAX	460.80	428.54	396.29	368.64
ST7008-3	DC-500 MHz	75 OHMS	0-65 dB in 1.0 dB steps	1, 2, 4, 8, 10, 20 & 20 dB	DC-100 MHz, $\pm .3$ dB 100-300 MHz, $\pm .8$ dB	DC-100 MHz, 1.10:1 MAX 100-300 MHz, 1.20:1 MAX 300-500 MHz, 1.30:1 MAX	460.80	428.54	396.29	368.64
ST7008-4	DC-500 MHz	75 OHMS	0-45.5 dB in 0.5 dB steps	0.5, 1, 2, 4, 8, 10 & 20 dB	DC-100 MHz, $\pm .2$ dB 100-300 MHz, $\pm .3$ dB 300-500 MHz, $\pm .5$ dB	DC-100 MHz, 1.10:1 MAX 100-300 MHz, 1.20:1 MAX 300-500 MHz, 1.30:1 MAX	460.80	428.54	396.29	368.64
ST7008-5	DC-750 MHz	50 OHMS	0-102 dB in 1.0 dB steps	1, 2, 3, 6, 10, 20, 20, 20 dB	$\pm .3$ dB or 1%	1.40:1 MAX	799.35	743.40	687.44	639.48
ST7008-6	DC-750 MHz	50 OHMS	0-82.5 dB in 0.5 dB steps	0.5, 1, 2, 3, 6, 10, 20, 20 dB	$\pm .3$ dB or 1%	1.40:1 MAX	799.35	743.40	687.44	639.48

TOGGLE SWITCH ATTENUATORS

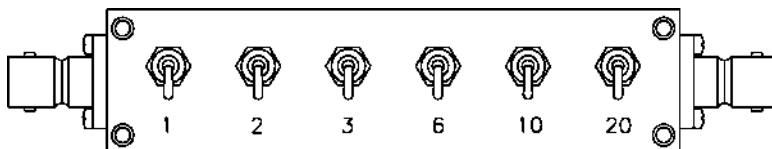

All units have BNC female connectors.

ST7036 & ST7038 series have 1 watt average power.


ST7037 series has 10 watts average power with 5000 watts stak.

Model No.	FREQUENCY RANGE	IMSTDANCE	ATTENUATION RANGE	ATTENUATION ACCURACY OVERALL	VSWR MAX.	P R I C E			
						1-24	25-49	50-99	100 +
ST7036-1	DC-1 GHz	50 OHMS	0-42 dB in 1 dB steps	± 1.0 dB	1.40:1	\$584.15	\$543.26	\$502.37	\$467.32
ST7036-2	DC-1 GHz	50 OHMS	0-82.5 dB in .5 dB steps	± 1.5 dB	1.40:1	584.15	543.26	502.37	467.32
ST7036-3	DC-1 GHz	50 OHMS	0-102 dB in 1 dB steps	± 1.5 dB	1.40:1	633.30	588.97	544.64	506.64
ST7037-1	DC-500 MHz	50 OHMS	0-42 dB in 1 dB steps	± 1.5 dB	1.50:1	1567.45	1457.73	1348.01	1253.96
ST7037-2	DC-500 MHz	50 OHMS	0-82.5 dB in .5 dB steps	± 1.5 dB	1.50:1	1880.95	1749.28	1617.62	1504.76
ST7038-1	DC-1 GHz	75 OHMS	0-42 dB in 1 dB steps	± 1.0 dB	1.40:1	574.70	534.47	494.24	459.76
ST7038-2	DC-1 GHz	75 OHMS	0-82.5 dB in .5 dB steps	± 1.5 dB	1.40:1	563.50	524.06	484.61	450.80
ST7038-3	DC-1 GHz	75 OHMS	0-102 dB in 1 dB steps	± 1.5 dB	1.40:1	599.45	557.49	515.53	479.56

Attenuators /
RF Components

PROGRAMMABLE ATTENUATOR

IMSTDANCE.....50 Ohms NOMINAL
FREQUENCY RANGE.....DC TO 1,000 MHz
ATTENUATION ACCURACY STR STEP..... $\pm .3$ dB
VSWR.....1.4:1 MAXIMUM
POWER HANDLING CAPABILITY..... $\frac{1}{2}$ WATT AVERAGE; 50 WATTS STAK
SWITCHING TIME.....15 MILLISECOND
OSTRATING TEMSTRATURE RANGE.....-20°C TO +60°C
OSTRATING VOLTAGE.....+12 VDC AT 45 mA STR STEP MAXIMUM
CONNECTORS.....SMA FEMALE

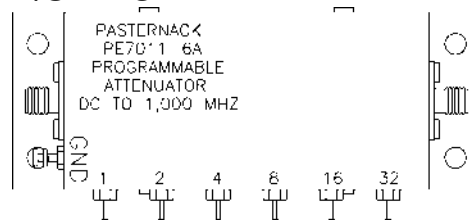

Model No.	ATTENUATION RANGE	ATTENUATION STEPS	INSERTION LOSS	P R I C E			
				1-24	25-49	50-99	100 +
ST7011-6A	63 dB IN 1 dB STEPS	1, 2, 4, 8, 16, 32 dB	2 dB	\$679.20	\$631.66	\$584.11	\$543.36



Mob: +91 7217885948

www.rfconnector.in

pradeep@rfconnector.in



www.rfconnector.in