




# Synergy Telecom P Ltd.

## C4 Male Connector for LMR 100 Crimp:---

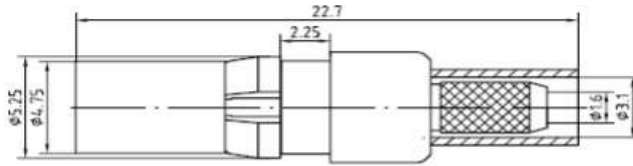

### Electrical Specification

<b>Characteristic Impedance</b>	50 ohm
<b>Frequency Range</b>	DC-3 GHz
<b>VSWR</b>	≤ 1.07(0~2.2G)    ≤ 1.15(0~3G)
<b>Dielectric strength</b>	≥25000V RMS, at sea level
<b>Dielectric Resistance</b>	≥ 5000 M Ω
<b>Insertion Loss</b>	≤ 0.08dB (@2200MHz)
<b>Center Contact Resistance</b>	≤ 1.0M Ω
<b>Outer Contact Resistance</b>	≤ 0.25MΩ
<b>RoHS</b>	Compliance

### Mechanical

<b>Durability Mating cycle</b>	≥500
<b>Termination cable retention</b>	≥300N

### Material Specification

Connector Parts	Material	Plating
<b>Body</b>	Brass	Gold
<b>Outer Contact</b>	Brass	CuSnZn
<b>Center Contact</b>	Brass	Au
<b>Fastener</b>	Brass	Ni
<b>Dielectric</b>	PTFE	-

### Environmental

<b>Temperature Range</b>	- 40°C – +85 °C
--------------------------	-----------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India  
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,  
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/