


Synergy Telecom P Ltd.

Mini DIN 4.3/10 Male Clamp Connector For 1/2" Foam Feeder

Part No. STO24310M12006

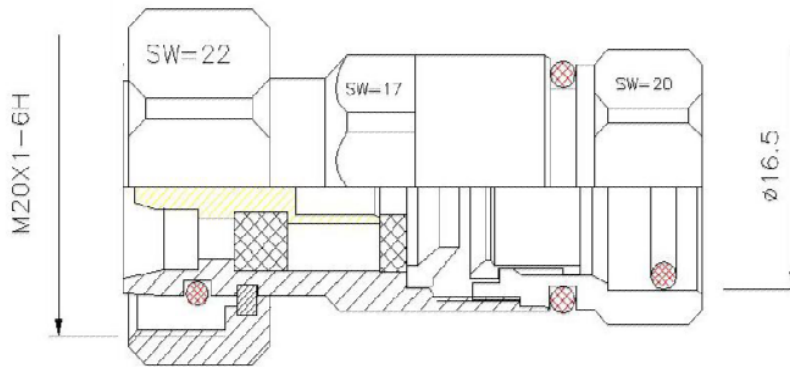

Electrical:

Characteristic Impedance	50 ohm
Frequency Range	DC-6 GHz
VSWR	≤ 1.10 @DC-3 GHz
Dielectric Withstanding Voltage	≥ 2500 V RMS,50Hz,at sea level
Dielectric Resistance	≥ 5000 M Ω
Contact Resistance	Center Contact ≤ 1 m Ω Outer Contact ≤ 1 m Ω

Mechanical:

Durability	Mating Cycles ≥ 100
------------	--------------------------

Material and Plating:

	Material	Plating
Body	Brass	Tri - alloy
Insulator	PTFE	-
Center Conductor	Phosphor Bronze	Ag

Environmental:

Operating Temperature Range	-40°C ~ +85°C
RoHs	Compliant

WZ-47 BUDHELLA VILLAGE, VIKASPURI, NEW DELHI – 110018
PHONE: 011-28533349, MOB: 9810138894/9212558066, FAX: 011-28533349
EMAIL: info@rfconnector.in, WEBSITE: <http://rfconnector.in/>