


# Synergy Telecom P Ltd.

## N FEMALE 4 HOLE LMR-200 CLAMP

**Part no -ST02NF4H02006**

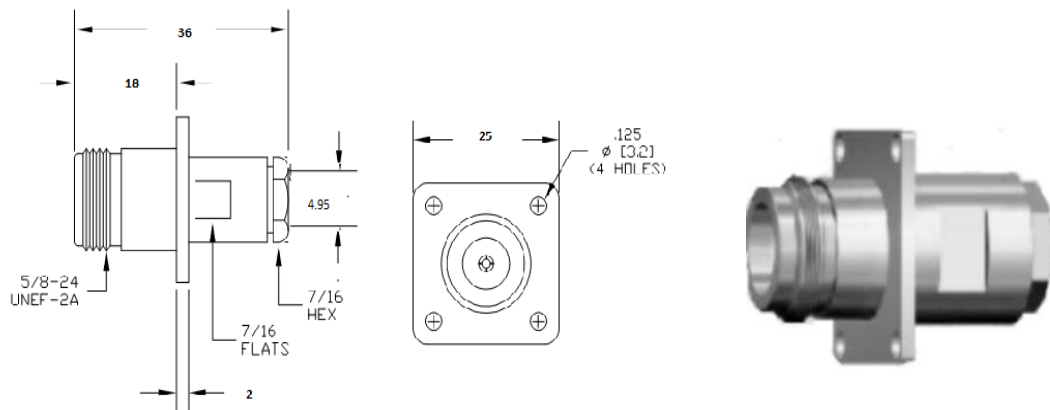

### **Electrical:**

Characteristic Impedance	50 ohm
Frequency Range	DC-4 Ghz
VSWR	$\leq 1.15 @ DC-3 \text{ GHz}$
Dielectric Withstanding Voltage	$\geq 1000 \text{ V RMS}, 50 \text{ Hz}, \text{ at sea level}$
Dielectric Resistance	$\geq 5000 \text{ M}\Omega$
Contact Resistance	Center Contact $\leq 1 \text{ m}\Omega$ Outer Contact $\leq 0.25 \text{ m}\Omega$

### **Mechanical:**

Durability	Mating Cycles $\geq 500$
------------	--------------------------

### **Material and Plating:**

	<b>Material</b>	<b>Plating</b>
Body	Brass	Ni
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	Au

### **Environmental:**

Operating Temperature Range	$-40^\circ \text{C} \sim +85^\circ \text{C}$
RoHs	Compliant

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018  
Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349  
Email:- info@rfconnector.in, Website:- www.rfconnector.in