


Synergy Telecom P Ltd.

N MALE RG- 141 SUCO

Part no-ST02NMBH141318

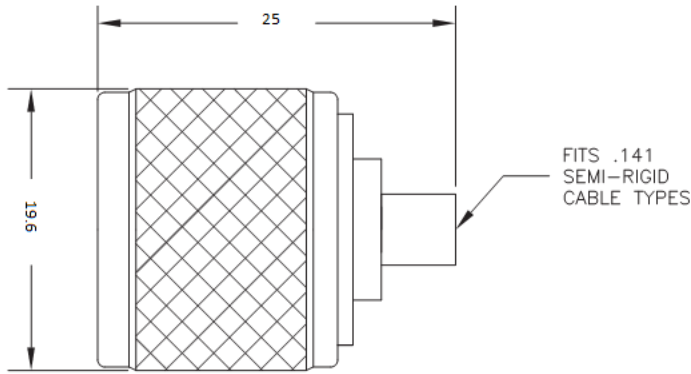

Electrical:

Characteristic Impedance	50 ohm
Frequency Range	DC-18 GHz
VSWR	$\leq 1.15 @ DC-10 \text{ GHz}$
Dielectric Withstanding Voltage	$\geq 1000 \text{ V RMS}, 50 \text{ Hz}, \text{ at sea level}$
Dielectric Resistance	$\geq 5000 \text{ M}\Omega$
Contact Resistance	Center Contact $\leq 1 \text{ m}\Omega$ Outer Contact $\leq 0.25 \text{ m}\Omega$

Mechanical:

Durability	Mating Cycles ≥ 500
------------	--------------------------

Material and Plating:

	Material	Plating
Body	Brass	Ni
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	Ag

Environmental:

Operating Temperature Range	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
RoHs	Compliant