


Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd

SAA(F) 2-HOLE SOLDER:-

Synergy Telecom (P) Ltd

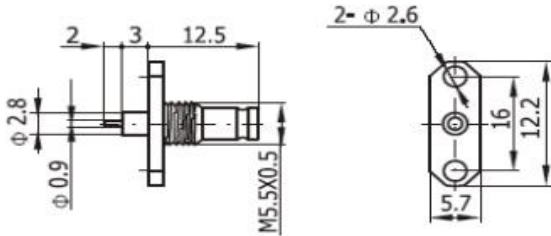

Telecom (P) Ltd

Telecom (P) Ltd

Telecom (P) Ltd

Telecom (P) Ltd

Telecom (P) Ltd

Electrical Specification

Characteristic Impedance

50 ohm

Frequency Range

DC- 3 GHz

VSWR

≤ 1.07(0~2.2G) ≤ 1.15(0~3G)

Dielectric strength

≥750V RMS, at sea level

Dielectric Resistance

≥ 5000 M Ω

Insertion Loss

≤ 0.08dB (@2200MHz)

Center Contact Resistance

≤ 0.006 Ω

Outer Contact Resistance

≤ 0.002 Ω

RoHS

Compliance

Mechanical

Durability Mating cycle

≥500

Termination cable retention

≥300N

Material Specification

Connector Parts

Material

Plating

Body

Brass

Gold

Outer Contact

Brass

CuSnZn

Center Contact

Brass

Au

Fastener

Brass

Ni

Dielectric

PTFE

-

Environmental

Temperature Range

-40°C ~ +85°C

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/