


Synergy Telecom P Ltd.

BIAS TEE

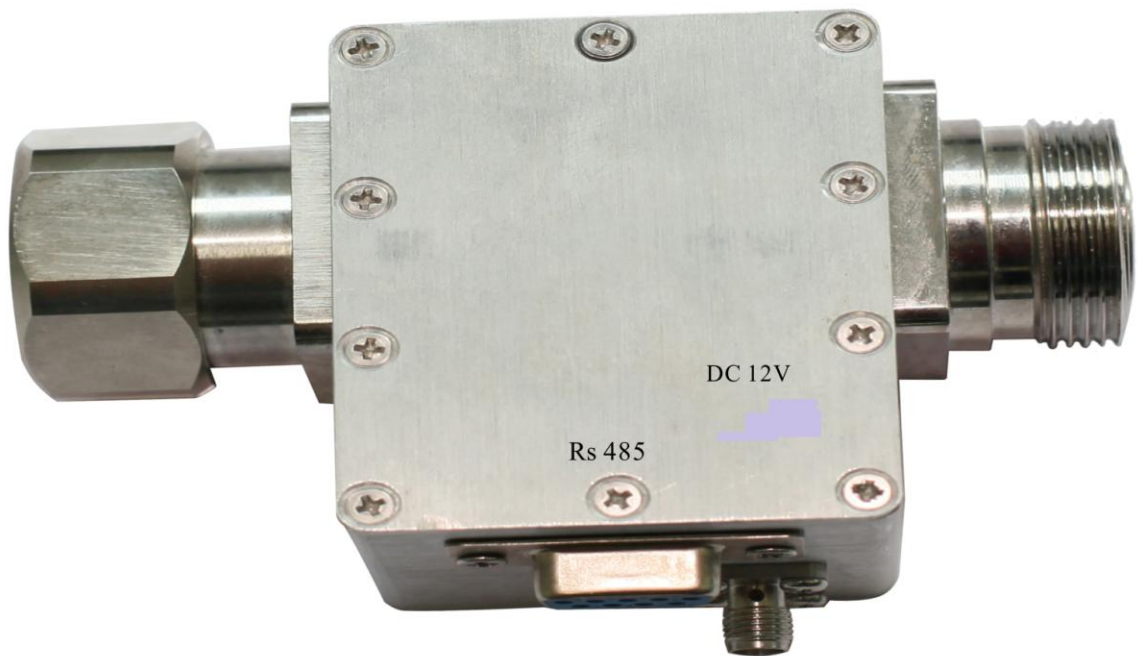

Specification of Bias Tee

Model: ST-BISE-T

Part No. : DM/DF

1. Technical parameter

Frequency (MHz)	customized
Rejection loss(dB)	0.3
In band ripple (dB)	0.1
Average Input Power (W)	200
Max. current (A)	1.0 (for reference)
IMD (dBc)	140@2*43dBm
Return loss(dB)	20
MTBF	>100000 Hours
Safty	EN 609 50 ETL
Environment	IEC 1312 - 1
Working temperature (°C)	-30 -- +60
Connector type	BTS: L29-M, ANT: L29-F, DC IN: SMA-F

2. Picture

