

SYNERGY TELECOM PVT. LTD

13-15 RPS FLATS, E-BLOCK, VIKAS PURI, NEW DELHI-110018


TEL:- 011-28533349, MOBILE:- +91-9810138894

EMAIL- pkumar@ndb.vsnl.net.in WEBSITE:- www.rfconnector.info

VARIABLE ATTENUATOR :- 0-30 DB 1db Step, 10 Watt

◆ Specification:

- ◆ Frequency: 0.8-2.5GHz
- ◆ Attenuation Range: 0-30dB 1dB step
- ◆ Attenuation Step: 1, 2, 4, 8, 16dB
- ◆ Impedance: 50Ω
- ◆ VSWR: ≤1.3:1
- ◆ Insertion Range: ≤2.0dB
- ◆ Attenuation Accuracy: ±1.5dB
- ◆ Power Rating: 10W
- ◆ Connector: N male to N female
- ◆ Temperature Range: -55°C~+85°C
- ◆ Dimension: 132×30×20mm

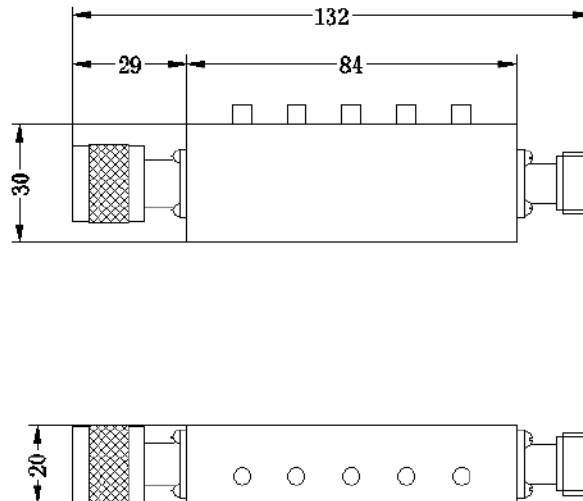

dimension:mm

Dimension Tolerance ±2%