



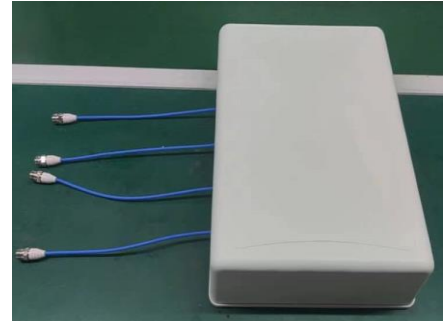





MIMO Panel Antenna 4*4 coverage 698MHz - 4000MHz

Electrical Specifications					
Item Name		MIMO Panel Antenna 4T4R 698-4000Mhz			
Frequency Range		MHz	698-960	1710-2700	3300-4000
Gain		dBi	6.0±1	6.5±1	6.5±1
Polarization			2x±45°	2x±45°	2x±45°
Beam width	Horizontal	deg	75	70	68
	Vertical		70	70	60
VSWR			≤2.10	≤1.8	≤1.8
Isolation		dB	>15	>20	>23
PIM, 3rd Order, 2 x 2 W,		dBc	≤-140		
Input Power per Port, maximum		watts	50		
Mechanical Specifications					
Dimensions, HxWxD		mm	340x320x78		
Weight, without Mounting Kit		kg	2.2		
Radome Material and Color			ABS, White, RAL9003		
Mounting Kit			On-wall		
Connector Type and Location			N-Female×4		
Operational Temperature		oC	-55 to +60		
Operational Humidity		%	< 95		




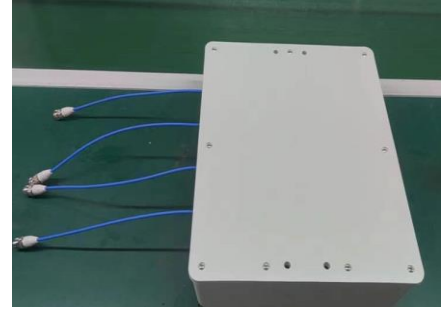


Radiation Patterns

Horizontal pattern



Vertical pattern



900MHz

1710MHz

2500MHz

3500

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN