





## Indoor Wide band Omni Antenna, coverage 698MHz - 4000MHz ,4x4 MIMO

<b>Electrical Specifications</b>				
Item No.	MIMO Omni Antenna 4T4R 698-4000Mhz			
Frequency Range	MHz	698-960	1710-2700	3300-4000
Gain	dBi	3±0.5	3.5±0.5	4.5±1.0
Polarization	Linear×4			
Beam width(Typical )	Horizontal	OMNI (360)		
	Vertical	deg	90	85
VSWR		≤1.8	≤1.8	≤1.8
Isolation	dB	>16	>20	>25
PIM, 3rd Order, 2 x 2 W	dBc	≤-140		
Maximum Power	watts	50		
Impedance	ohm	50		
<b>Mechanical Specifications</b>				
Connector Type		N-Female×4		
Dimensions	mm	Φ360×24		
Weight	kg	0.9		
Mounting Kit		Ceiling, via hole (standard)		
Radome Material and Color		ABS, White, RAL9003		
Operational Temperature	oC	-55~60		
Operational Humidity	%	< 95		
*This product is not suitable for installation on metal ceiling				

Horizontal pattern

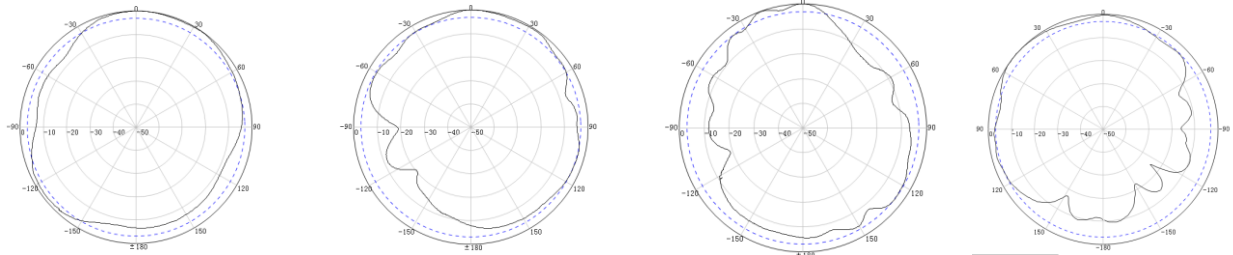

Vertical pattern

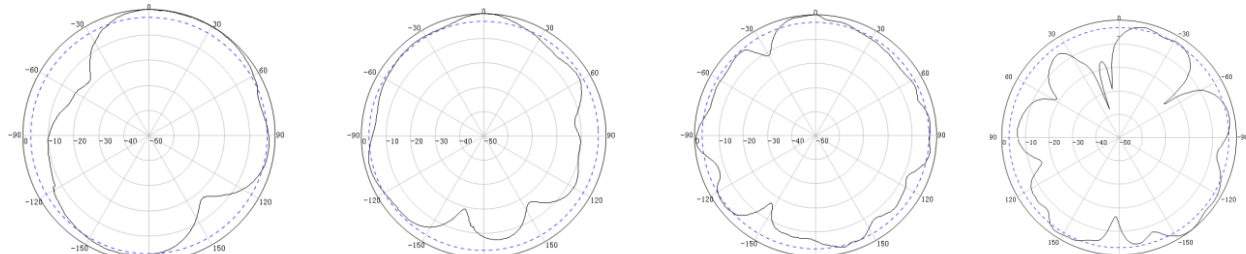

900MHz

1710MHz

2500MHz

3500



WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN