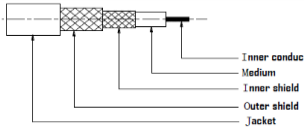

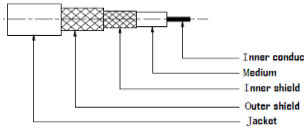



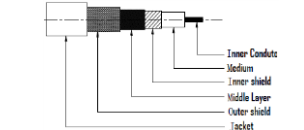

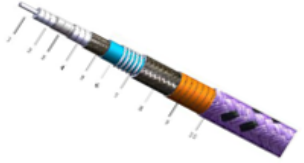

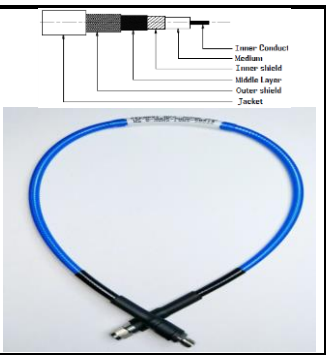
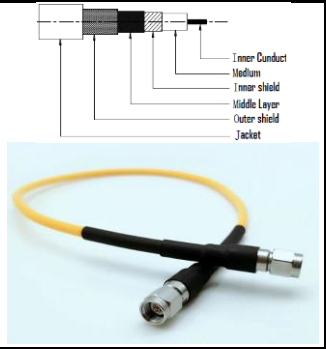
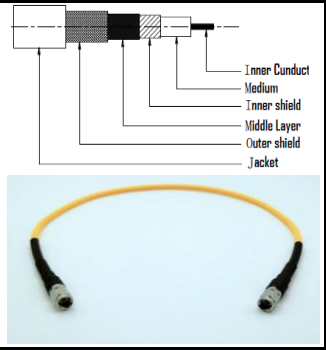
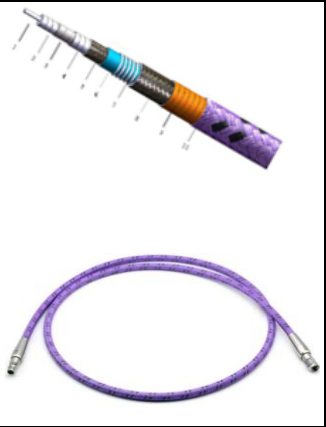


S. NO.	RF Cable	PART NO.	DESCRIPTION	IMAGES
1	N(M) to N(M) Test Cable Assembly Upto - 6Ghz	ST01NNMM1M06	<p>Inner Conductor - silver plated copperwire - 0.90mm  Insulation - PE - 2.95mm  Inner Shield - Silver Plated Copper Wire - 3.45mm  Outer Shield -Silver Plated Copper Wire - 3.95mm  Jacket - PVC - 5.30mm  Bending Radius - 25.4mm  Frequency - 6Ghz  Impedance - 50Ohm  Max. Power - 100w</p>	 
2	SMA(M) to N(M) Ultra Flexible Test Cable Assembly Upto - 6Ghz	ST01SMANMMUF1M06	<p>Inner Conductor - silver plated copperwire - 0.92mm  Insulation - PTFE - 3.00mm  Inner Shield - Silver Plated Copper Wire - 3.50mm  Outer Shield -Silver Plated Copper Wire - 3.95mm  Jacket - PVC - 5.20mm  Bending Radius - 25.4mm  Frequency - 6Ghz  Impedance - 500hm  Max. Power - 100w</p>	 
3	SMA(M) to N(M) Test Cable Assembly Upto - 6Ghz	ST01SMANMMTC1M06	<p>Inner Conductor - silver plated copperwire - 0.93mm  Insulation - PTFE - 3.00mm  Outer Shield -Silver Plated Copper Wire - 3.95mm  Jacket - FEP - 5.20mm  Bending Radius - 25.4mm  Frequency - 6Ghz  Impedance - 500hm  Max. Power - 100w</p>	 
4	SMA(M) to N(M) Test Cable Assembly Upto - 18Ghz	ST01SMANMMTC1M18	<p>Inner Conductor - silver plated copperwire - 1.44mm  Insulation - LDPTFE - 3.80mm  Inner Shield -Silver Plated Copper Wire - 4.00mm  Middle Shield -LDPTFE - 4.30mm  Outer Shield -Silver Plated Copper Wire - 4.65mm  Jacket - FEP - 5.00mm  Bending Radius - 25.4mm  Frequency - 18Ghz  Impedance - 500hm  Max. Power - 100w</p>	 
5	<p>SMA(M) to SMA(M) Millimeter Wave Test Cable Assembly Upto - 26.5Ghz</p> <p>Min Bending Redius - 25.0mm</p> <p>VSWR - 1.15:1</p> <p>Impedance - 50ohm</p> <p>Frequency - 26.5Ghz</p>	ST01SMAMMTC265	<p>Inner Conductor: silver plated copper wire  Insulation: LDPTFE  Inner Shield: silver plated flat copper wire braid  Middle Shield: LDPTFE  Outer Shield: silver plated copperwire braid  Jacket: FEP</p> <p>Inner Armor: silver plated copper  Strengthened Shield:silver plated copper wire  Anti-twist Layer: polyimide  Outer Armor: PTFE braid (purple+black)</p>	 

6	SMA(M) to SMA(F) Millimeter Wave Ultra Flexible Test Cable Assembly 26.5Ghz	ST01SMAMFUFTC265	<p>Inner Conductor - multi-layer spiralsilver plated copper - 1.02mm</p> <p>Insulation - LDPTFE - 3.07mm</p> <p>Inner Shield - plated flat copper wire braid- 3.27mm</p> <p>Middle Shield - LDPTFE - 3.47mm</p> <p>Outer Shield - Silver plated copper wire - 3.80mm</p> <p>Jacket - PUR - 5.20mm</p> <p>Frequency - 26.5Ghz</p> <p>Max. Power - 100w</p> <p>Impedance - 50Ohm</p>	
7	2.92mm(M) to 2.92mm(M) Millimeter Wave Test Cable Assembly DC-40Ghz	ST01292MMTC40	<p>Inner Conductor - multi-layer spiralsilver plated copper - 0.92mm</p> <p>Insulation - LDPTFE - 2.50mm</p> <p>Inner Shield - plated flat copper wire braid- 2.66mm</p> <p>Middle Shield - LDPTFE - 2.95mm</p> <p>Outer Shield - Silver plated copper wire - 3.11mm</p> <p>Jacket - PUR - 3.80mm</p> <p>Frequency - 40Ghz</p> <p>Max. Power - 50w</p> <p>Impedance - 50Ohm</p>	
8	2.92mm(M) to 2.92mm(M) Millimeter Wave Test Cable Assembly DC-50Ghz	ST01292MMTC50	<p>Inner Conductor - multi-layer spiralsilver plated copper - 0.92mm</p> <p>Insulation - LDPTFE - 2.50mm</p> <p>Inner Shield - plated flat copper wire braid- 2.66mm</p> <p>Middle Shield - LDPTFE - 2.95mm</p> <p>Outer Shield - Silver plated copper wire - 3.11mm</p> <p>Jacket - PUR - 3.80mm</p> <p>Frequency - 50Ghz</p> <p>Max. Power - 50w</p> <p>Impedance - 50Ohm</p>	
9	<p>2.92mm(M) to 2.92mm(F) Millimeter Wave Test Cable Assembly Upto - 50Ghz</p> <p>Min Bending Radius - 25.0mm</p> <p>VSWR - 1.15:1</p> <p>Impedance - 50ohm</p> <p>Frequency - 50Ghz</p>	ST01292MFTC50	<p>Inner Conductor: silver plated copper wire</p> <p>Insulation: LDPTFE</p> <p>Inner Shield: silver plated flat copper wire braid</p> <p>Middle Shield: LDPTFE</p> <p>Outer Shield: silver plated copperwire braid</p> <p>Jacket: FEP</p> <p>Inner Armor: silver plated copper</p> <p>Strengthened Shield:silver plated copper wire</p> <p>Anti-twist Layer: polyimide</p> <p>Outer Armor: PTFE braid (purple+black)</p>	
10	N(M) to N(M) VNA Grade Test Cable Assembly DC-18GHz for Network Analyzer	ST01NMMVNATC18	<p>Impedance - 50Ohm</p> <p>Frequency - 18Ghz</p> <p>VSWR Max - 1.30:1@DC-18GHz</p> <p>Phase Change VS Bending - <math>\leq \pm 2.4^\circ @ 18\text{GHz}</math></p> <p>Velocity of Propagation - 76%</p> <p>Screening Effectiveness - 90dB min.</p> <p>Dielectric Withstanding Voltage - KV(rms)</p> <p>Phase Change VS Bending - <math>\leq \pm 0.03\text{dB} @ 18\text{GHz}</math></p>	