Mob: +91 7217885948 www.rfconnector.in pradeeep@rfconnector.in
www.rfconnector.in

Tripods



60-ALQCI20

PARAMETERS	SPECIFICATION
Extended Height	63.0", 160cm
Closed Height	38", 96.3cm
Bare Tool Weight,	3.5+/-0.1 kg
Gross Weight,	4.6+/-0.1 kg
Head Type	Flat, Triangular
Clamping Style and Material	Quick Clamp and Super Tough Nylon Lever & Mild Steel clamp



60-ALQRI20

PARAMETERS	SPECIFICATION
Extended Height	64.0", 163cm
Closed Height	40.1", 102cm
Bare Tool Weight,	4.5+/-0.1 kg
Gross Weight,	5.7+/-0.1 kg
Head Type	Flat, Triangular
Clamping Style and Material	Quick Clamp and Super Tough Nylon Lever & Mild Steel clamp



CT152

PARAMETERS	SPECIFICATION
Extended Height	60.6", 154cm
Closed Height	29.3", cm
Bare Tool Weight,	2.4+/-0.1 kg
Gross Weight,	3.2+/-0.1 kg
Head Type	Flat, Triangular
Clamping Style and Material	Telescopic section with Quick Clamp and Super Tough Nylon Lever



60-ALCIT20

PARAMETERS	SPECIFICATION
Extended Height	63.0", 160cm
Closed Height	38", 96.3cm
Bare Tool Weight,	3.7+/-0.1 kg
Gross Weight,	4.8+/-0.1 kg
Head Type	Flat, Triangular
Clamping Style and Material	Dual Locking, Quick Clamp with Super Tough Nylon Lever & Mild Steel clamp and Wing Screw locking with Aluminum alloy clamp band



60-ALQRI20ELAZ

PARAMETERS	SPECIFICATION
Extended Height	115.0", 292cm
Closed Height	47.5", 120cm
Bare Tool Weight,	6.1+/-0.1 kg
Gross Weight,	7.3+/-0.1 kg
Head Type	Flat, Triangular with Elevator Column Attached
Body	Aluminum
Clamping Style and Material	Quick Clamp and Super Tough Nylon Lever & Mild Steel clamp



60-VLFG20

PARAMETERS	SPECIFICATION
Extended Height	66.0", 167cm
Closed Height	41.5", 105 cm
Bare Tool Weight,	5.5+/-0.1 kg
Gross Weight,	6.5+/-0.1 kg
Head Type	Flat, Triangular Machined
Body	Fiber Glass
Clamping Style and Material	Dual Locking, Quick Clamp with Super Tough Nylon Big Lever & Mild Steel clamp and Wing Screw locking with Aluminum alloy clamp band



WDF20MAX

PARAMETERS	SPECIFICATION
Extended Height	69.7", 177cm
Closed Height	44.6", 113cm
Bare Tool Weight,	8.0+/-0.1 kg
Gross Weight,	9.5+/-0.1 kg
Head Type	Round Machined Head with Head Cap
Clamping Style and Material	Dual Locking, Quick Clamp with Super Tough Nylon Big Lever & Mild Steel clamp and Wing Screw locking with Aluminum alloy clamp band



FGTX20MAX

PARAMETERS	SPECIFICATION
Extended Height	69.7", 177cm
Closed Height	44.6", 113cm
Bare Tool Weight,	8.0+/-0.1 kg
Gross Weight,	9.5+/-0.1 kg
Head Type	Round Machined Head with Head Cap
Clamping Style and Material	Dual Locking, Quick Clamp with Super Tough Nylon Big Lever & Mild Steel clamp and Wing Screw locking with Aluminum alloy clamp band



AUTO LEVEL KIT(AL24D)

PARAMETERS	SPECIFICATION
Magnification	24x
Resolving power	4"
Working range	80m
Reticle pattern	cross line
Compensator	pendulum compensator with magnetic damping system
Standard deviation for 1km	2.0mm

Plot no. 845, DSIIDC Industrial Area KHASRA NO. 33/23 (0-7) & 37/4 (0-10)Gali no. 6, near Harnandi dharam kanta Mundka Industrial Area, New Delhi, Delhi, 110041

Mob: +91 7217885948 www.rfconnector.in pradeeep@rfconnector.in

www.rfconnector.in

Tripod: 60-ALC-DCB/CT125



- *Height-adjustable legs with quick clamps/screws for precise setup.*
- *Heavy-duty construction (aluminum or fiberglass) for long-lasting use.*
- *Non-slip pointed shoes for stability on rough or soft ground.*
- *Flat or dome head design to suit different instruments.*
- *Lightweight and foldable for easy transport.*

- *Lightweight aluminum construction for easy handling and transport.*
- *Universal compatibility with most surveying instruments.*
- *Telescopic, height-adjustable legs with quick-release clamps.*
- *Flat or dome head design with standard mounting screw.*
- *Non-slip pointed shoes for stability on different surfaces.*
- *Weather-resistant finish for durability in field conditions.*



Plot no. 845, DSIIDC Industrial Area KHASRA NO. 33/23 (0-7) & 37/4 (0-10)Gali no. 6, near Harnandi dharam kanta Mundka Industrial Area, New Delhi, Delhi, 110041

Mob: +91 7217885948 www.rfconnector.in pradeeep@rfconnector.in
www.rfconnector.in

Measuring Wheels




CT-30M

SPECIFICATION	
COLLAPSED LENGTH	608MM
EXTENDED LENGTH	995 MM
MEASURING UNITS	Meter-dm
WHEEL CIRCUMFERENCE	917 MM
WHEEL DIAMETER	11.5 Inch
COUNTER TYPE	Single
HANDLE TYPE	Telescopic, in 3-sections
Net Wt.	0.93 KG



CT-40M

SPECIFICATION	
COLLAPSED LENGTH	608MM
EXTENDED LENGTH	995 MM
MEASURING UNITS	Meter-dm
WHEEL CIRCUMFERENCE	917 MM
WHEEL DIAMETER	11.5 Inch
COUNTER TYPE	Single
HANDLE TYPE	Telescopic, in 3-sections
Net Wt.	0.93 KG

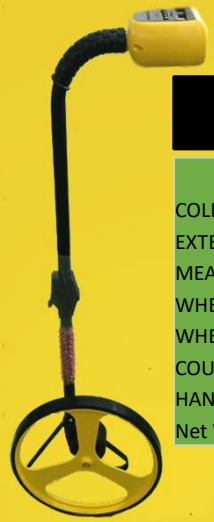

31-D12

SPECIFICATION	
COLLAPSED LENGTH	555 MM
EXTENDED LENGTH	935 MM
MEASURING UNITS	Meter, cm / Feet, in,Feet 10TH
WHEEL CIRCUMFERENCE	998 MM
WHEEL DIAMETER	12.5 Inch
COUNTER TYPE	Digital Readout
HANDLE TYPE	Extended
Net Wt.	1.56 KG









Plot no. 845, DSIIDC Industrial Area KHASRA NO. 33/23 (0-7) & 37/4 (0-10)Gali no. 6, near Harnandi dharam kanta Mundka Industrial Area, New Delhi, Delhi, 110041

Mob: +91 7217885948 www.rfconnector.in pradeeep@rfconnector.in
www.rfconnector.in

Measuring Wheels




MEASURE WITH CONFIDENCE

A measuring wheel is a simple, yet highly effective tool used to measure long distances quickly and accurately. It consists of a wheel attached to a handle, with a counter mechanism that records the number of wheel rotations and converts them into distance.



CT-30M

Measuring wheels are widely used in surveying, construction, roadwork, landscaping, agriculture, and civil engineering projects where tape measures are impractical. They are especially useful for measuring curved paths, uneven terrain, or long stretches such as roads and boundary lines.

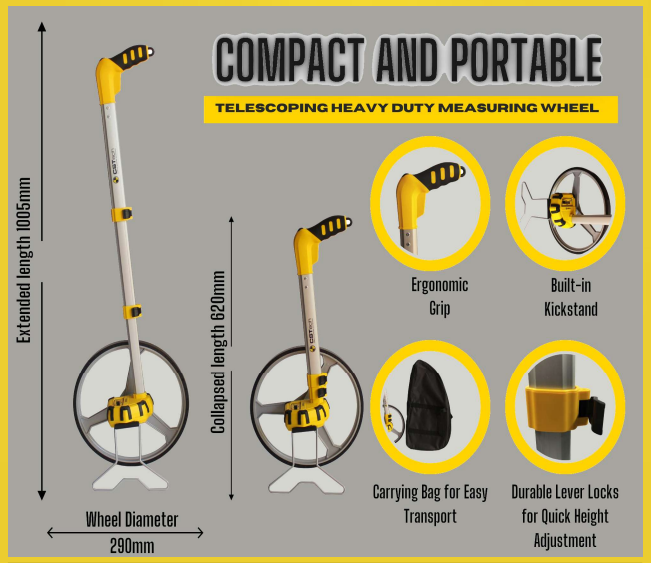

CT-40M

Plot no. 845, DSIIDC Industrial Area KHASRA NO. 33/23 (0-7) & 37/4 (0-10)Gali no. 6, near Harnandi dharam kanta Mundka Industrial Area, New Delhi, Delhi, 110041