



 pradeep@rfconnector.in

 **9810138894**

 www.synergyppl.com

RF Microwave

Antenna Products

Horn Antenna
Spiral Antenna
Microstrip Antenna
Log Periodic Antenna
Discone-Type Antenna
Bi-Conical Antenna

 www.synergyppl.com

ANTENNA PRODUCT OVERVIEW	1
1. CATEGORY: FREQUENCY, POLARIZATION, DIRECTIVITY	1
2. CATEGORY: APPLICATION	4
BROADBAND HORN ANTENNA	11
OCTAVE HORN ANTENNA	15
MULTI OCTAVE HORN ANTENNA	18
DUAL POLARIZATION HORN ANTENNA	26
1. BROADBAND DUAL POLARIZATION HORN ANTENNA	26
2. CONICAL DUAL POLARIZATION HORN ANTENNA	28
3. OPEN BOUNDARY QUAD-RIDGED HORN ANTENNA	29
4. OPTIONS FOR DUAL POLARIZATION HORN ANTENNA	30
STANDARD GAIN HORN ANTENNA	33
DIAGONAL HORN ANTENNA	56
OPEN ENDED WAVEGUIDE PROBES	63
1. RECTANGULAR WAVEGUIDE PROBES WITH WAVEGUIDE INTERFACE	64
2. RECTANGULAR WAVEGUIDE PROBES WITH WAVEGUIDE INTERFACE, EQUIPPED WITH ABSORBER	65
3. RECTANGULAR WAVEGUIDE PROBES WITH RIGHT ANGLE COAXIAL OUTPUT	66
4. RECTANGULAR WAVEGUIDE PROBES WITH RIGHT ANGLE COAXIAL OUTPUT, EQUIPPED WITH ABSORBER	69
5. RECTANGULAR WAVEGUIDE PROBES WITH ENDLAUNCH COAXIAL OUTPUT	72
6. RECTANGULAR WAVEGUIDE PROBES WITH ENDLAUNCH COAXIAL OUTPUT, EQUIPPED WITH ABSORBER	74
DUAL POLARIZATION WAVEGUIDE PROBES	76
1. DUAL POL. WAVEGUIDE PROBES WITH WAVEGUIDE INTERFACE	77
2. DUAL POL. WAVEGUIDE PROBES WITH WAVEGUIDE INTERFACE, EQUIPPED WITH ABSORBER	78
3. DUAL POL. WAVEGUIDE PROBES WITH RIGHT ANGLE COAXIAL INTERFACE	79
4. DUAL POL. WAVEGUIDE PROBES WITH RIGHT ANGLE COAXIAL INTERFACE, EQUIPPED WITH ABSORBER	82
5. DUAL POL. WAVEGUIDE PROBES WITH V PORT ENDLAUNCH COAXIAL INTERFACE	85
6. DUAL POL. WAVEGUIDE PROBES WITH V PORT ENDLAUNCH COAXIAL INTERFACE, EQUIPPED WITH ABSORBER	87
CONICAL HORN ANTENNA	89
1. CONICAL HORN WITH EIA STANDARD CIRCULAR WG INTERFACE	90
2. CONICAL HORN WITH OTHER CIRCULAR WG INTERFACE	92
3. CONICAL HORN WITH RECTANGULAR WG TRANSITION - LINEAR POLARIZATION	94
4. CONICAL HORN WITH INTEGRATED RECTANGULAR WG TRANSITION - LINEAR POLARIZATION	99
5. CONICAL HORN WITH POLARIZER AND RECTANGULAR WG TRANSITION - CIRCULAR POLARIZATION	100
6. CONICAL HORN WITH ORTHO-MODE TRANSDUCER (OMT) - DUAL LINEAR POLARIZATION	104
7. CONICAL HORN WITH POLARIZER AND ORTHO-MODE TRANSDUCER (OMT) - DUAL CIRCULAR POLARIZATION	114
CORRUGATED CONICAL HORN ANTENNA	117



pradeep@rfconnector.in

9810138894

www.synergyppl.com

CORRUGATED FEED HORN ANTENNA	140
1. CORRUGATED FEED HORN ANTENNAS WITH WAVEGUIDE AND COAXIAL INTERFACE.....	141
2. CORRUGATED FEED HORN ANTENNAS WITH WAVEGUIDE AND COAXIAL INTERFACE, EQUIPPED WITH ABSORBER.....	145
3. CORRUGATED FEED HORN ANTENNAS WITH WAVEGUIDE AND COAXIAL INTERFACE, DUAL LINEAR POLARIZATION	149
4. CORRUGATED FEED HORN ANTENNAS WITH WAVEGUIDE AND COAXIAL INTERFACE, DUAL LINEAR POLARIZATION, EQUIPPED WITH ABSORBER	152
LENS HORN ANTENNA.....	155
SPOT-FOCUSING LENS HORN ANTENNA.....	157
CASSEGRAIN	160
CAVITY BACKED SPIRAL ANTENNA.....	162
CONICAL LOG SPIRAL ANTENNA.....	165
HELICAL ANTENNA.....	166
MICROSTRIP ARRAY ANTENNA	167
MICROSTRIP OMNI ANTENNA.....	168
LOG PERIODIC ANTENNA	169
1. LINEAR POLARIZATION.....	169
2. DUAL LINEAR POLARIZATION	172
DISCONE-TYPE ANTENNA	173
BI-CONICAL ANTENNA.....	174
RADAR TRIHEDRAL CORNER REFLECTOR.....	175
ANTENNA ACCESSORIES	176



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Antenna Product Overview

1. Category: Frequency, Polarization, Directivity

Antenna Type	Frequency(GHz)	Polarization	Directivity
Broadband Horn Antenna	0.1 ~ 110	Linear	Directional
Octave Horn Antenna	1 ~ 12	Linear	Directional
Multi Octave Horn Antenna	0.84 ~ 40	Linear	Directional
Standard Gain Horn Antenna	0.32 ~ 750	Linear	Directional
Diagonal Horn Antenna	0.75 ~ 220	Linear	Directional
Dual Polarization Horn Antenna	1 ~ 67	Dual Linear	Directional
Open Boundary Quad-Ridged Horn Antenna	0.4 ~ 67	Dual Linear	Directional
Options for Dual Polarization Horn Antenna	(It is determined by the dual polarization antenna used)	LHCP / RHCP, Dual Circular, Vertical/ Horizontal/ LHCP/ RHCP Switchable	Directional
Open Ended Waveguide Probes	0.32 ~ 750	Linear/Dual Linear	Directional
Conical Horn Antenna	8.2 ~ 110	Linear/Dual Linear/Circular	Directional
Corrugated Conical Horn Antenna	8.2 ~ 110	Linear/Dual Linear/Circular	Directional
Corrugated Feed Horn Antenna	8.2 ~ 110	Linear/Dual Linear	Directional
Lens Horn Antenna	7.9 ~ 112	Linear/Dual Linear/Circular	Directional
Spot-Focusing Lens Horn Antenna	7.9 ~ 112	Linear	Directional
Gaussian Optical Lens Horn Antenna	Customized, 8.2~500	Linear/Circular	Directional
Prime Focus Parabolic Antenna	Customized, 1~500	Linear/Circular	Directional
Cassegrain	Customized, 8.2~500	Linear/Circular	Directional
Cavity Backed Spiral Antenna	0.5 ~ 40	LHCP / RHCP	Directional
Conical Log Spiral Antenna	0.2 ~ 10	LHCP / RHCP	Directional
Helical Antenna	1 ~ 18	LHCP / RHCP	Directional
Microstrip Array Antenna	0.4 ~ 77	Linear/Dual Linear/Circular	Directional
Log Periodic Antenna	0.02 ~ 18	Linear/Dual Linear/Circular	Directional
Loop Antenna	0.00001 ~ 0.5	Linear	Directional
Microstrip Omni Antenna	0.02 ~ 18	Linear	Omnidirectional
Discone-type Antenna	0.03 ~ 18	Linear	Omnidirectional
Bi-Conical Antenna	0.1 ~ 110	Linear	Omnidirectional
Radar Trihedral Corner Reflector	Customized		




pradeep@rfconnector.in

9810138894

www.synergyppl.com

Selection Chart 1

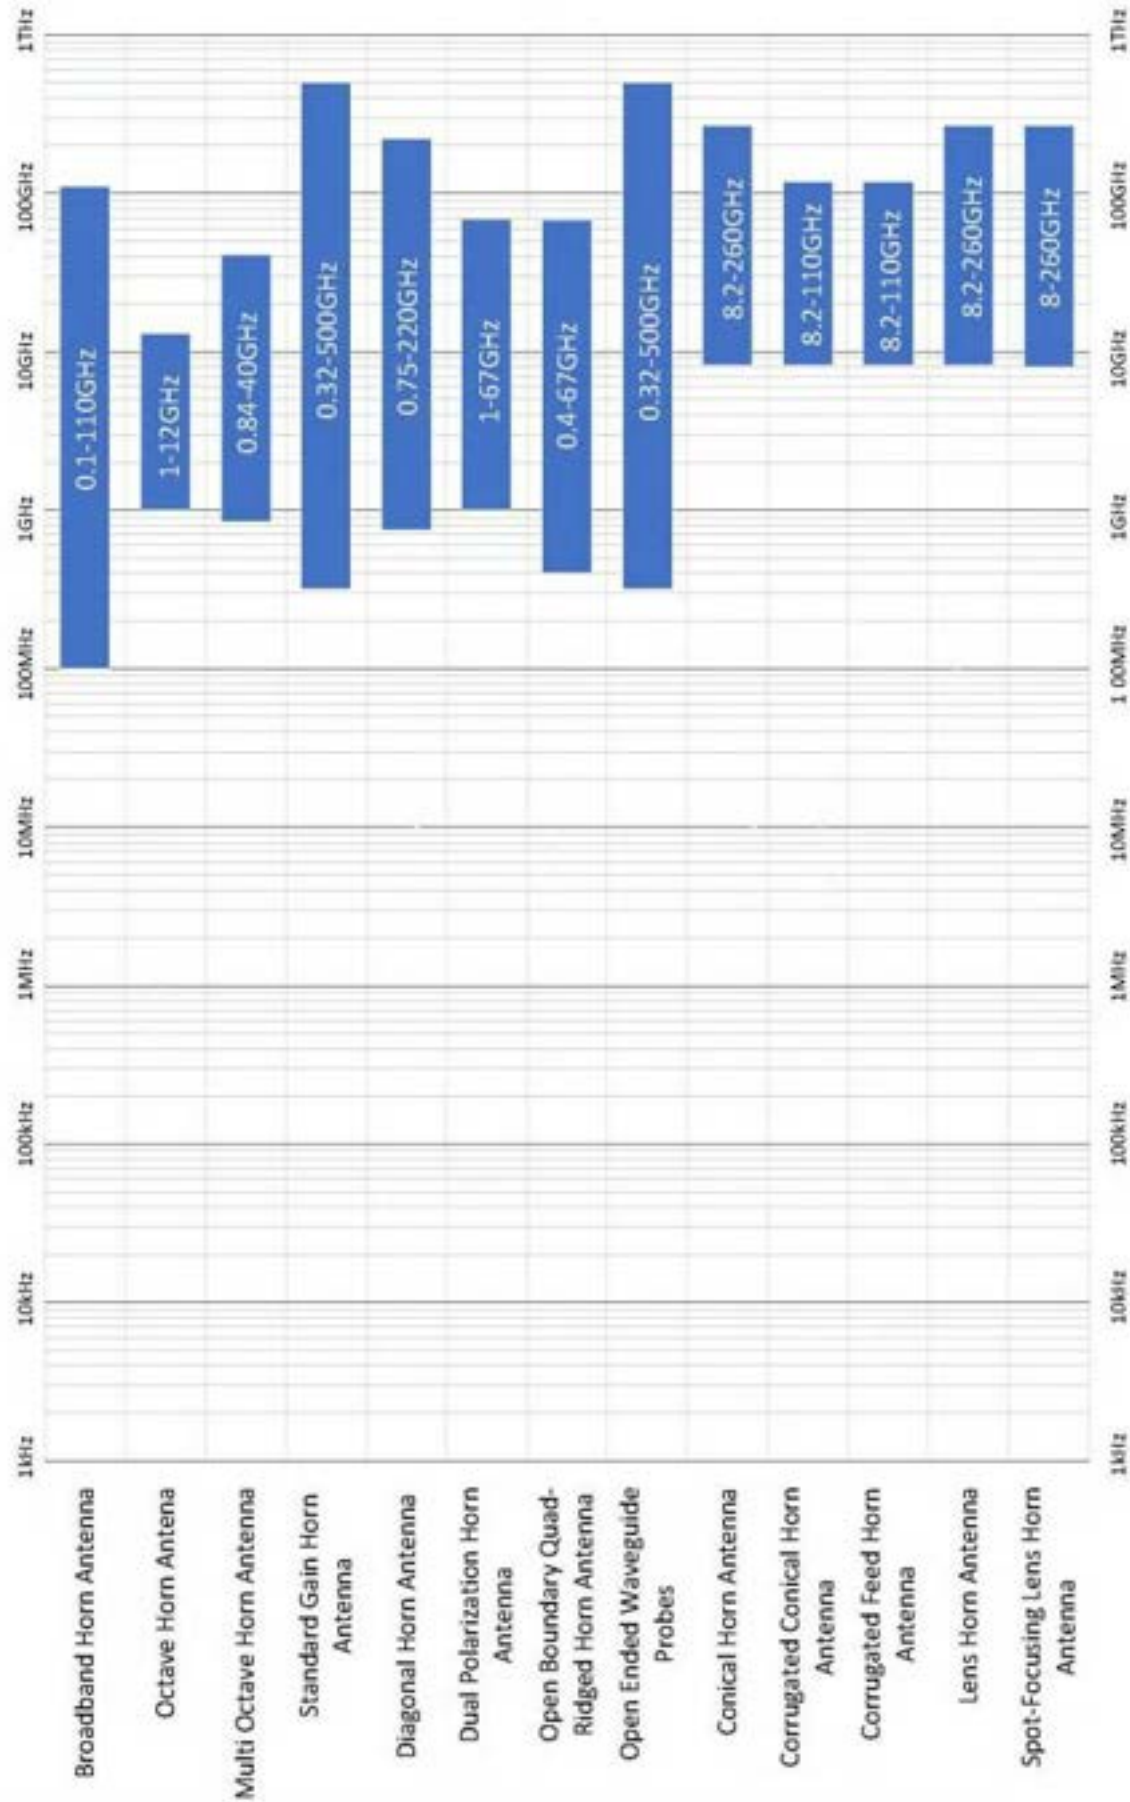




pradeep@rfconnector.in

9810138894

www.synergyppl.com

Selection Chart 2

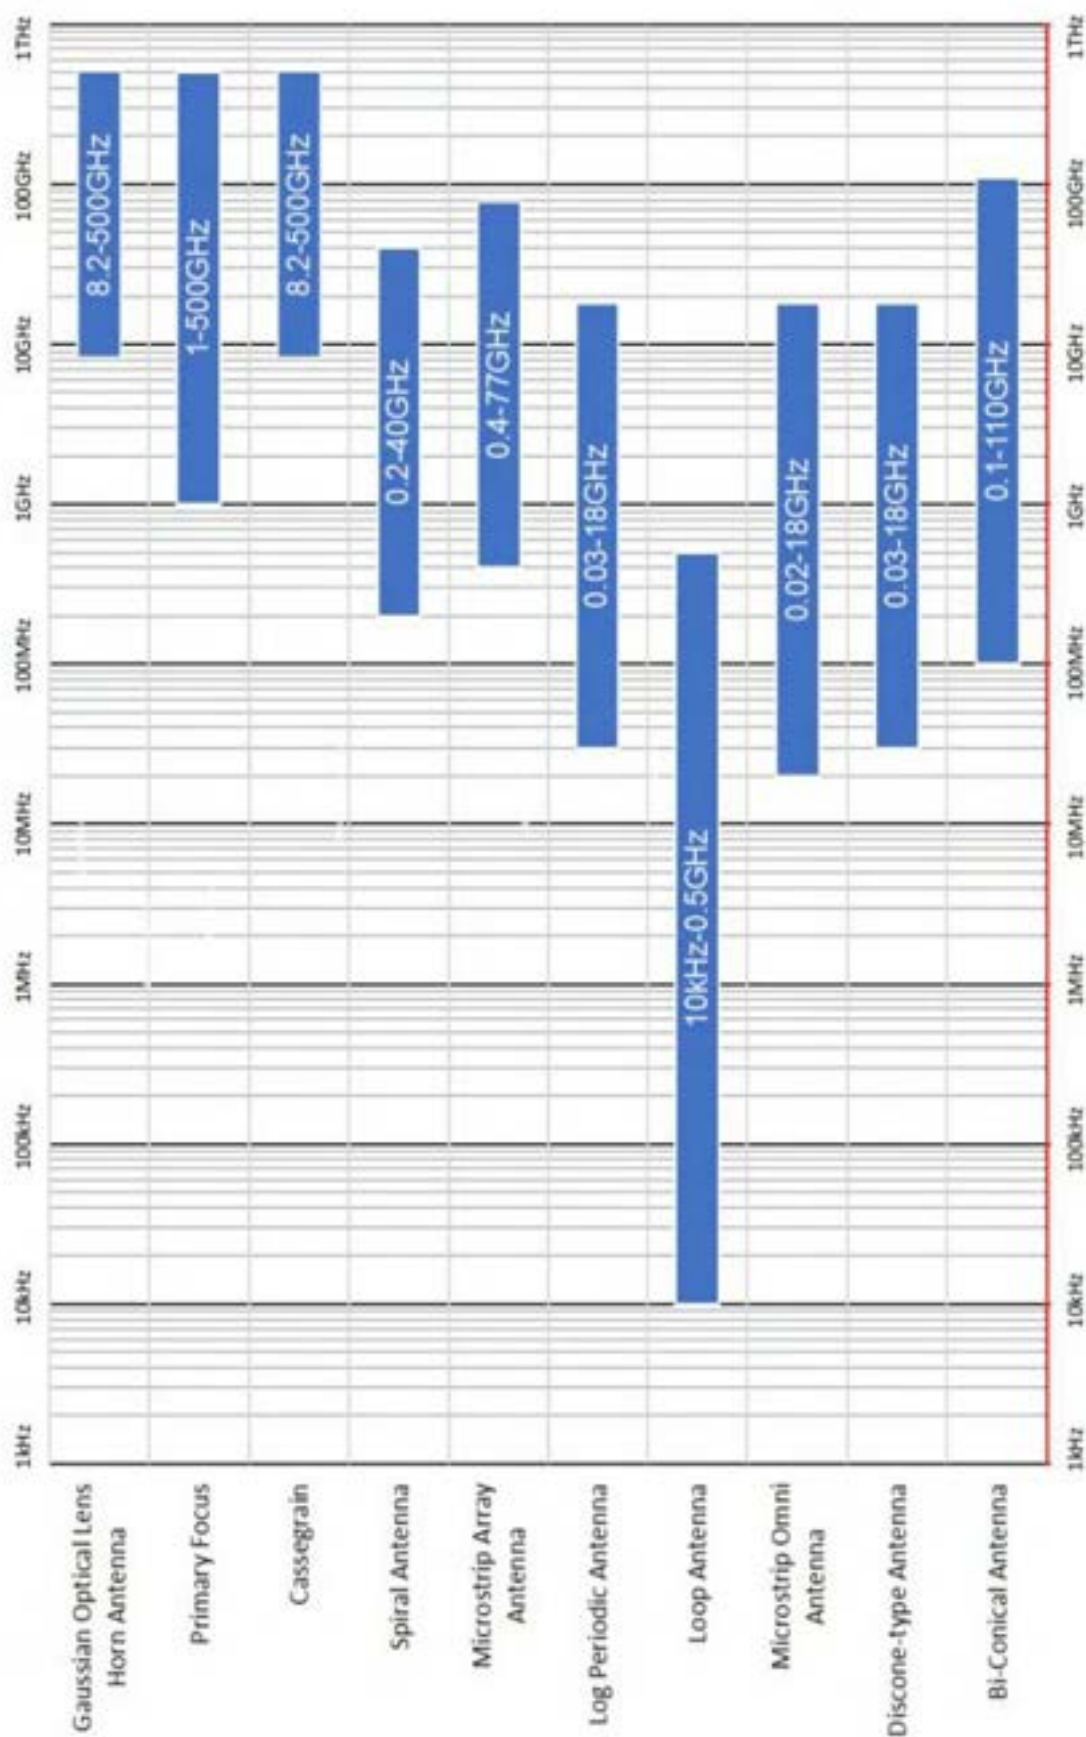



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergyppl.com

2. Category: Application

Applications	Antenna Type	Photo
Illumination of Anechoic Chamber	Broadband Horn Antenna	
	Octave Horn Antenna	
	Multi Octave Horn Antenna	
	Broadband Dual Polarization Horn Antenna	
	Standard Gain Horn Antenna	
	Open Boundary Quad-Ridged Horn Antenna	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Applications	Antenna Type	Photo
Illumination of Anechoic Chamber	Open Ended Waveguide Probes (Linear&Dual Linear)	
	Log Periodic Antenna (Linear&Dual Linear)	
Near Field Test	Open Ended Waveguide Probes (Linear&Dual Linear)	
	Open Boundary Quad-Ridged Horn Antenna	
Compact Antenna Test Range	Corrugated Feed Horn Antenna (Linear&Dual Linear)	
5G Millimeter Wave Test	Broadband Horn Antenna	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Applications	Antenna Type	Photo
5G Millimeter Wave Test	Standard Gain Horn Antenna	
	Dual Polarization Horn Antenna	
	Open Ended Waveguide Probes (Linear&Dual Linear)	
	Conical Horn Antenna (Linear &Dual Linear& Circular)	
	Corrugated Conical Horn Antenna (Linear&Dual Linear& Circular)	
	Corrugated Feed Horn Antenna (Linear&Dual Linear)	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Applications	Antenna Type	Photo
Free Space Material Measurements	Broadband Horn Antenna	
	Lens Horn Antenna (Linear & Dual Linear & Circular)	
	Spot-Focusing Lens Horn Antenna	
Low sidelobe & Symmetrical Radiation Pattern	Diagonal Horn Antenna	
	Conical Horn Antenna (Linear & Dual Linear & Circular)	
	Corrugated Conical Horn Antenna (Linear & Dual Linear & Circular)	




pradeep@rfconnector.in

9810138894

www.synergyppl.com

Applications	Antenna Type	Photo
Omni-directional Antenna	Microstrip Omni Antennas	
	Discone-type Antennas	
	Bi-Conical Antenna	
Radar Cross Section	Radar Trihedral Corner Reflector	
Electronic Warfare	Cavity Backed Spiral Antennas (RHCP&LHCP)	

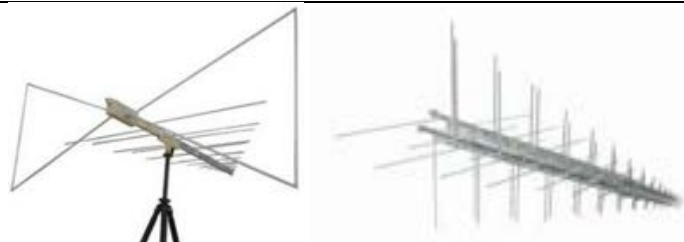Applications	Antenna Type	Photo
Electronic Warfare	Log Periodic Antenna (Linear&Dual Linear)	
	Discone-type Antennas	
	Bi-Conical Antenna	
	Multi Octave Horn Antenna	
	Broadband Horn Antenna	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Applications	Antenna Type	Photo
High Gain Antenna	Lens Horn Antenna (Linear & Dual Linear & Circular)	
	Gaussian Optical Lens Horn Antenna (Linear & Circular)	
	Prime Focus Parabolic Antenna (Linear & Circular)	
	Cassegrain (Linear & Circular)	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Broadband Horn Antenna

Broadband Horn Antenna



The LB series broadband waveguide horn antennas are linearly polarized and provide an efficient low cost means of making broadband measurements. A-INFO's horn antenna can cover from 100MHz to 110GHz frequency range. These horns are ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications. The LB series horn antennas have high gain, over octave bandwidths, low VSWR and advantages of small size and light weight.

Also we provide specific gain horn antennas according to customers' requirement.

Model	Freq.(GHz)	Pol.	Gain, Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-110-NF	0.1-1.0	Linear	8	2.5	N-F	800	2250 x 2154 x 1423
LB-225-NF	0.2-2.5	Linear	12	2.0	N-F	800	967 x 731 x 902
LB-225-7/16F					7/16 DIN-F	800	967 x 731 x 902
LB-230-NF	0.2-3.0	Linear	10	2.0	N-F	800	-
LB-230-7/16F					7/16 DIN-F	800	-
LB-460-NF	0.4-6.0	Linear	10	1.5	N-F	500	492 x 320 x 436
LB-460-NFSPO							532x340x443
LB-530-NF	0.5-3.0	Linear	11	1.5	N-F	500	435 x 288 x 348
LB-530-NFSPO							453x305x355
LB-560-NF	0.5-6.0	Linear	11	1.5	N-F	500	435 x 288 x 348
LB-560-NFSPO							453x305x355
LB-5300-KF	0.5-30.0	Linear	12	1.5	2.92mm-F	20	368.5x264.6x328
LB-5300-2.4F					2.4mm-F	10	368.5x264.6x328
LB-5400-KF	0.5-40.0	Linear	12	1.6	2.92mm-F	20	368.5x264.6x328
LB-5400-2.4F					2.4mm-F	10	368.5x264.6x328
LB-5500-2.4F	0.5-50.0	Linear	12	1.8	2.4mm-F	10	368.5x264.6x328
LB-660-NF	0.6-6.0	Linear	11	1.5	N-F	500	435 x 288 x 348
LB-660-NFSPO							453x305x355
LB-780-NF	0.7-8.0	Linear	10	2.0	N-F	300	284x183x252
LB-780-NFSPO							300x200x259
LB-780-SF					SMA-F	50	284x183x252
LB-780-SFSPO							300x200x259

Broadband Horn Antenna

Model	Freq.(GHz)	Pol.	Gain,Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-7180-NF	0.7-18.0	Linear	12	2.0	N-F	300	244 x 160.5 x 228
LB-7180-NFSPO							256×172.5×233
LB-7180-SF					SMA-F	50	244 x 160.5 x 228
LB-7180-SFSPO							256×172.5×233
LB-880-NF	0.8-8.0	Linear	10	1.5	N-F	300	284×183×252
LB-880-NFSPO							300×200×259
LB-880-SF					SMA-F	50	284×183×252
LB-880-SFSPO							300×200×259
LB-8180-NF	0.8-18.0	Linear	12	1.5	N-F	300	244×160.5×228
LB-8180-NFSPO							256×172.5×233
LB-8180-SF					SMA-F	50	244×160.5×228
LB-8180-SFSPO							256×172.5×233
LB-8300-KF	0.8-30.0	Linear	12	1.5	2.92mm-F	20	244.5×144.3×201
LB-8300-2.4F					2.4mm-F	10	244.5×144.3×201
LB-8400-KF	0.8-40.0	Linear	12	1.5	2.92mm-F	20	244.5×144.3×201
LB-8400-2.4F					2.4mm-F	10	244.5×144.3×201
LB-8440-2.4F	0.8-44.0	Linear	12	1.5	2.4mm-F	10	244.5×144.3×201
LB-8500-2.4F	0.8-50.0	Linear	12	1.5	2.4mm-F	10	244.5×144.3×201
LB-1025-NF	1.0-2.5	Linear	15	1.5	N-F	500	586×436×769
LB-1025-NFSPO							602×452×773
LB-1025-SF					SMA-F	50	586×436×769
LB-1025-SFSPO							602×452×773
LB-1025-7/16F					7/16 DIN-F	500	586×436×769
LB-1025-7/16FSPO							602×452×773
LB-1080-NF	1.0-8.0	Linear	11	1.5	N-F	300	244×160×204
LB-1080-NFSPO							256×172.5×208.5
LB-1080-SF					SMA-F	50	244×160×204
LB-1080-SFSPO							256×172.5×208.5
LB-1080-M-NF	1.0-8.0	Linear	10	2.5	N-F	150	85 x 89.5 x 140
LB-1080-M-SF					SMA-F	50	85 x 89.5 x 140
LB-10125-NF	1.0-12.5	Linear	11	1.5	N-F	300	244×160×204
LB-10125-NFSPO							256×172.5×208.5
LB-10125-SF					SMA-F	50	244×160×204
LB-10125-SFSPO							256×172.5×208.5
LB-10180-NF	1.0-18.0	Linear	11	1.5	N-F	300	244×160×204
LB-10180-NFSPO							256×172.5×208.5
LB-10180-SF					SMA-F	50	244×160×204
LB-10180-SFSPO							256×172.5×208.5
LB-10200-SF	1.0-20.0	Linear	11	1.5	SMA-F	50	244×160×204
LB-10200-SFSPO							256×172.5×208.5
LB-10200-NF					N-F	300	244×160×204
LB-10200-NFSPO							256×172.5×208.5



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Broadband Horn Antenna

Model	Freq.(GHz)	Pol.	Gain,Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-2060-H-NF	2.0-6.0	Linear	15	1.3	N-F	500	245×195×407
LB-2060-H-NFSPO							257×207×413
LB-2060-H-SF					SMA-F	50	245×195×407
LB-2060-H-SFSPO							257×207×413
LB-2080-SF	2.0-8.0	Linear	12	1.5	SMA-F	50	103.8×77.9×127
LB-2080-SFSPO							115×88×130
LB-2080-NF					N-F	150	103.8×77.9×127
LB-2080-NFSPO							115×88×130
LB-20180-SF	2.0-18.0	Linear	12	1.5	SMA-F	50	103.8×77.9×127
LB-20180-SFSPO							115×88×130
LB-20180-NF					N-F	150	103.8×77.9×127
LB-20180-NFSPO							115×88×130
LB-20180H-SF	2.0-18.0	Linear	17	1.5	SMA-F	50	183×183×438
LB-20180H-SFSPO							195×183×442.5
LB-20180H-NF					N-F	150	183×183×438
LB-20180H-NFSPO							195×183×442.5
LB-20200-SF	2.0-20.0	Linear	12	1.5	SMA-F	50	103.8×77.9×127
LB-20200-SFSPO							115×88×130
LB-20200-NF					N-F	150	103.8×77.9×127
LB-20200-NFSPO							115×88×130
LB-20200H-SF	2.0-20.0	Linear	17	1.5	SMA-F	50	183×183×438
LB-20200H-SFSPO							195×183×442.5
LB-20200H-NF					N-F	150	183×183×438
LB-20200H-NFSPO							195×183×442.5
LB-20245-SF	2.0-24.5	Linear	13	1.5	SMA-F	50	84×64×127
LB-20245-SFSPO							94.5×74.5×130
LB-20265-SF	2.0-26.5	Linear	13	1.5	SMA-F	50	93.8×63.9×112
LB-20265-SFSPO							104×74×115
LB-20265-3.5F					3.5mm-F	50	93.8×63.9×112
LB-20265-3.5FSPO							104×74×115
LB-40400-KF	4.0-40.0	Linear	13	1.5	2.92mm-F	20	65×51.8×41.8
LB-40400-KFSPO							68×60×50
LB-40400-2.4F					2.4mm-F	10	65×51.8×41.8
LB-40400-2.4FSPO							68×60×50
LB-45500-2.4F	4.5-50.0	Linear	13	1.5	2.4mm-F	10	65×43.8×41.3
LB-45500-2.4FSPO							68×50×41.5
LB-60180-NF	6.0-18.0	Linear	10	1.5	N-F	150	55 x 55.1 x 109
LB-60180-NFSPO							63 x 59.1 x 112
LB-60180-SF					SMA-F	50	55 x 44 x 109
LB-60180-SFSPO							63×52×112
LB-60180-HNF					HP N-F	500	55×50.5×115.3
LB-60180-HNFSPO							63×54.5×118.3



pradeep@rfconnector.in

9810138894


www.synergyppl.com

Broadband Horn Antenna

Model	Freq.(GHz)	Pol.	Gain,Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-60670-1.85F	6.0-67.0	Linear	13	1.5	1.85mm-F	5	41.3 x 41.3 x 65
LB-60670-1.85FSPO							41.3 x 41.3 x 68
LB-80180-SF	8.0-18.0	Linear	10	1.5	SMA-F	50	48 x 39 x 96.7
LB-80180-SFSP0						50	56 x 47 x 99.7
LB-80180-NF					N-F	150	48 x 52.6 x 96.7
LB-80180-NFSP0							56 x 56.6 x 99.7
LB-80180-HNF					HP N-F	500	48 x 47.6 x 96.7
LB-80180-HNFSP0							56 x 51.6 x 99.7
LB-180400-KF	18.0-40.0	Linear	15	1.5	2.92mm-F	20	32 x 28.6 x 71
LB-180400-KFSP0							38 x 33 x 73
LB-180400-KM					2.92mm-M	20	32 x 28.6 x 71
LB-180400-2.4F						10	32 x 28.6 x 71
LB-180400-2.4FSP0							38 x 33 x 73
LB-180400H-KF	18.0-40.0	Linear	20	1.5	2.92mm-F	20	55 x 55 x 113
LB-180400H-KFSP0							55 x 55 x 115.5
LB-180400H-2.4F					2.4mm-F	10	55 x 55 x 113
LB-180400H-2.4FSP0							55 x 55 x 115.5
LB-180450-E2.4F	18.0-45.0	Linear	15	1.5	Endlaunch 2.4mm-F	10	32x27x86.2
LB-180450H-E2.4F	18.0-45.0	Linear	20	1.5	Endlaunch 2.4mm-F	10	55 x 55 x 128.2
LB-180500-2.4F	18.0-50.0	Linear	15	1.5	2.4mm-F	10	32 x 29.9 x 71
LB-180500-2.4FSP0							38 x 33 x 73
LB-180500H-2.4F	18.0-50.0	Linear	20	1.5	2.4mm-F	10	55 x 55 x 113
LB-180500H-2.4FSP0							55 x 55 x 115.5
LB-180550-1.85F	18.0-55.0	Linear	15	1.5	1.85mm-F	5	32 x 30.4 x 71
LB-180550-1.85FSP0							38 x 33.4 x 73
LB-180550H-1.85F	18.0-55.0	Linear	20	1.5	1.85mm-F	5	55 x 55 x 113
LB-180550H-1.85FSP0							55 x 55 x 115.5
LB-1001100-1.0F	10.0-110.0	Linear	13	1.5	1.0mm-F	4	41.3x41.3x65
LB-1401100-1.0F	14.0-110.0	Linear	13	1.5	1.0mm-F	4	41.3x41.3x65
LB-1801100-1.0F	18.0-110.0	Linear	14	1.5	1.0mm-F	4	41.3x41.3x65

Octave Horn Antenna

Octave Horn Antenna

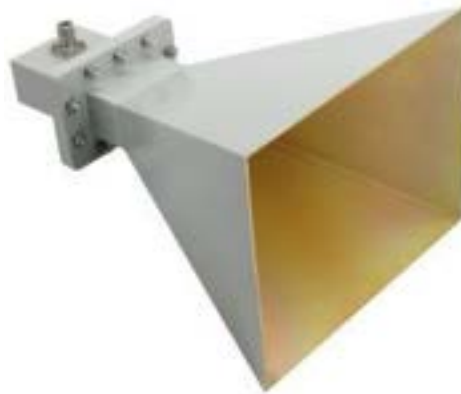

The LB series octave horn antennas are linearly polarized and provide an efficient low cost means of making measurements. A-INFO's octave horn antenna can cover from 1GHz to 12GHz frequency range. These horns are ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Model	Freq.(GHz)	Pol.	Gain, Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-OH-650-10-C-NF	1.0-2.0	Linear	10	1.5	N-F	300	315×235×428
LB-OH-650-10-C-NFSPO							331×251×432
LB-OH-650-10-C-SF					SMA-F	50	315×235×428
LB-OH-650-10-C-SFSPO							331×251×432
LB-OH-650-10-C-7/16F					7/16 DIN-F	500	315×235×428
LB-OH-650-10-C-7/16FSPO							331×251×432
LB-OH-650-15-C-NF	1.0-2.0	Linear	15	1.5	N-F	300	564×424×650
LB-OH-650-15-C-NFSPO							582×442×655
LB-OH-650-15-C-SF					SMA-F	50	564×424×650
LB-OH-650-15-C-SFSPO							582×442×655
LB-OH-650-15-C-7/16F					7/16 DIN-F	500	564×424×650
LB-OH-650-15-C-7/16FSPO							582×442×655
LB-OH-320-10-C-NF	2.0-4.0	Linear	10	1.5	N-F	300	165×125×257
LB-OH-320-10-C-NFSPO							171×131×260
LB-OH-320-10-C-SF					SMA-F	50	165×125×257
LB-OH-320-10-C-SFSPO							171×131×260
LB-OH-320-15-C-NF	2.0-4.0	Linear	15	1.5	N-F	300	264×204×377
LB-OH-320-15-C-NFSPO							275×215×382



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Octave Horn Antenna

Model	Freq.(GHz)	Pol.	Gain, Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-OH-159-10-C-NF	4.0-8.0	Linear	10	1.5	N-F	150	81×65×175
LB-OH-159-10-C-NFSPO							81×65×178
LB-OH-159-10-C-SF					SMA-F	50	81×61.9×175
LB-OH-159-10-C-SFSPO							81×61.9×178
LB-OH-159-10-C-TF					TNC-F	150	81×64.9×175
LB-OH-159-10-C-TFSPO							81×64.9×178
LB-OH-159-10-C-7					7mm	150	81×73.8×175
LB-OH-159-10-C-7SPO							81×73.8×178
LB-OH-159-10-C-3.5F					3.5mm-F	50	81×61.9×175
LB-OH-159-10-C-3.5FSP0							81×61.9×178
LB-OH-159-15-C-NF	4.0-8.0	Linear	15	1.5	N-F	150	138.1×102.9×230
LB-OH-159-15-C-NFSPO							145×110×233
LB-OH-159-15-C-SF					SMA-F	50	138.1×102.9×230
LB-OH-159-15-C-SFSPO							145×110×233
LB-OH-159-15-C-TF					TNC-F	150	138.1×102.9×230
LB-OH-159-15-C-TFSPO							145×110×233
LB-OH-159-15-C-7					7mm	150	138.1×102.9×230
LB-OH-159-15-C-7SPO							145×110×233
LB-OH-159-15-C-3.5F					3.5mm-F	50	138.1×102.9×230
LB-OH-159-15-C-3.5FSP0							145×110×233
LB-OH-159-20-C-NF	4.0-8.0	Linear	20	1.5	N-F	150	225×173×315
LB-OH-159-20-C-NFSPO							232×180×318
LB-OH-159-20-C-SF					SMA-F	50	225×173×315
LB-OH-159-20-C-SFSPO							232×180×318
LB-OH-159-20-C-TF					TNC-F	150	225×173×315
LB-OH-159-20-C-TFSPO							232×180×318
LB-OH-159-20-C-7					7mm	150	225×173×315
LB-OH-159-20-C-7SPO							232×180×318
LB-OH-159-20-C-3.5F					3.5mm-F	50	225×173×315
LB-OH-159-20-C-3.5FSP0							232×180×318
LB-OH-112-10-C-NF	6.0-12.0	Linear	10	1.5	N-F	150	52×54.2×130
LB-OH-112-10-C-NFSPO							58×54.2×132.5
LB-OH-112-10-C-SF					SMA-F	50	52×47.8×130
LB-OH-112-10-C-SFSPO							58×47.8×132.5
LB-OH-112-10-C-TF					TNC-F	150	52×54×130
LB-OH-112-10-C-TFSPO							58×54×132.5
LB-OH-112-10-C-7					7mm	150	52×63×130
LB-OH-112-10-C-7SPO							58×63×132.5
LB-OH-112-10-C-3.5F					3.5mm-F	50	52×47.8×130
LB-OH-112-10-C-3.5FSP0							58×47.8×132.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Octave Horn Antenna

Model	Freq.(GHz)	Pol.	Gain,Typ (dBi)	VSWR, Typ	Connector	Power Handling (W) CW	Size (mm)
LB-OH-112-15-C-NF	6.0-12.0	Linear	15	1.5	N-F	150	102×71×180
LB-OH-112-15-C-NFSPO							109×78×183
LB-OH-112-15-C-SF					SMA-F	50	102×71×180
LB-OH-112-15-C-SFSPO							109×78×183
LB-OH-112-15-C-TF					TNC-F	150	102×71×180
LB-OH-112-15-C-TFSPO							109×78×183
LB-OH-112-15-C-7					7mm	150	102×74.5×180
LB-OH-112-15-C-7SPO							109×78×183
LB-OH-112-15-C-3.5F					3.5mm-F	50	102×71×180
LB-OH-112-15-C-3.5FSPO							109×78×183
LB-OH-112-20-C-NF	6.0-12.0	Linear	20	1.5	N-F	150	172×128×270
LB-OH-112-20-C-NFSPO						150	179×135×273
LB-OH-112-20-C-SF					SMA-F	50	172×128×270
LB-OH-112-20-C-SFSPO							179×135×273
LB-OH-112-20-C-TF					TNC-F	150	172×128×270
LB-OH-112-20-C-TFSPO							179×135×273
LB-OH-112-20-C-7					7mm	150	172×128×270
LB-OH-112-20-C-7SPO							179×135×273
LB-OH-112-20-C-3.5F					3.5mm-F	50	172×128×270
LB-OH-112-20-C-3.5FSPO							179×135×273



pradeep@rfconnector.in


9810138894

www.synergyppl.com


Multi Octave Horn Antenna

Multi Octave Horn Antenna

A Type:

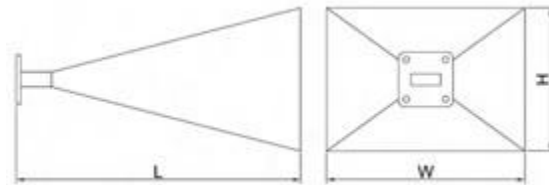

C Type:

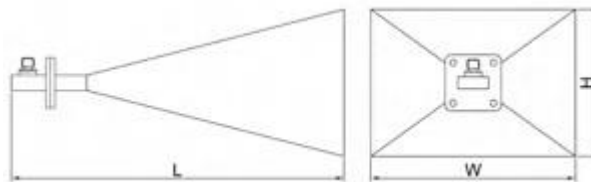

The LB series multi octave horn antennas are linearly polarized and provide an efficient low cost means of making broadband measurements. A-INFO's horn antenna can cover from 840MHz to 40GHz frequency range. These horns are ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications. The LB series horn antennas have high gain, over octave bandwidths, low VSWR and advantages of small size and light weight . Test report is for reference only.

Multi Octave Horn Antenna

Model	Freq.(GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-08420-10-A	0.84-2.0	10	Linear	1.5	FPWRD84D24	-	366×326×450
LB-08420-10-ASPO							382×342×454
LB-08420-10-C-NF					N-F	500	366×326×669
LB-08420-10-C-NFSPO							382×342×673
LB-08420-10-C-SF					SMA-F	50	366×326×669
LB-08420-10-C-SFSPO							382×342×673
LB-08420-10-C-7/16F					7/16 DIN	500	366×326×669
LB-08420-10-C-7/16FSPO							382×342×673
LB-08420-15-A	0.84-2.0	15	Linear	1.5	FPWRD84D24	-	586×436×550
LB-08420-15-ASPO							602×452×554
LB-08420-15-C-NF					N-F	500	586×436×769
LB-08420-15-C-NFSPO							602×452×773
LB-08420-15-C-SF					SMA-F	50	586×436×769
LB-08420-15-C-SFSPO							602×452×773
LB-08420-15-C-7/16F					7/16 DIN	500	586×436×769
LB-08420-15-C-7/16FSPO							602×452×773
LB-1536-10-A	1.5-3.6	10	Linear	1.5	FPWRD150D24	-	164×134×195
LB-1536-10-ASPO							176×146×201
LB-1536-10-C-NF					N-F	500	164×134×292
LB-1536-10-C-NFSPO							176×146×298
LB-1536-10-C-SF					SMA-F	50	164×134×292
LB-1536-10-C-SFSPO							176×146×298
LB-1536-15-A	1.5-3.6	15	Linear	1.5	FPWRD150D24	-	245×195×310
LB-1536-15-ASPO							257×207×316
LB-1536-15-C-NF					N-F	500	245×195×407
LB-1536-15-C-NFSPO							257×207×413
LB-1536-15-C-SF					SMA-F	50	245×195×407
LB-1536-15-C-SFSPO							257×207×413
LB-2048-10-A	2.0-4.8	10	Linear	1.5	FPWRD200D24	-	164×134×195
LB-2048-10-ASPO							176×146×201
LB-2048-10-C-NF					N-F	500	164×134×292
LB-2048-10-C-NFSPO							176×146×298
LB-2048-10-C-SF					SMA-F	50	164×134×292
LB-2048-10-C-SFSPO							176×146×298



pradeep@rfconnector.in

9810138894

www.synergytpl.com

Multi Octave Horn Antenna

Model	Freq.(GHz)	Gain,Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-2048-15-A	2.0-4.8	15	Linear	1.5	FPWRD200D24	-	245×195×310
LB-2048-15-ASPO							257×207×316
LB-2048-15-C-NF					N-F	500	245×195×407
LB-2048-15-C-NFSPO							257×207×413
LB-2048-15-C-SF					SMA-F	50	245×195×407
LB-2048-15-C-SFSPO							257×207×413
LB-2048-20-A	2.0-4.8	15	Linear	1.5	FPWRD200D24	-	434.1×362.1×753
LB-2048-20-C-NF					N-F	500	434.1×362.1×850
LB-2048-20-C-SF					SMA-F	50	434.1×362.1×850
LB-2678-10-A	2.6-7.8	10	Linear	1.5	FPWRD250D30	-	124×104×150
LB-2678-10-ASPO							136×116×156
LB-2678-10-C-NF					N-F	500	124×104×217
LB-2678-10-C-NFSPO							136×116×223
LB-2678-10-C-SF					SMA-F	50	124×104×217
LB-2678-10-C-SFSPO							136×116×223
LB-2678-15-A	2.6-7.8	15	Linear	1.5	FPWRD250D30	-	228×158×313
LB-2678-15-ASPO							240×170×319
LB-2678-15-C-NF					N-F	500	228×158×380
LB-2678-15-C-NFSPO							240×170×386
LB-2678-15-C-SF					SMA-F	50	228×158×380
LB-2678-15-C-SFSPO							240×170×386
LB-2678-20-A	2.6-7.8	20	Linear	1.5	FPWRD250D30	-	279×233×490
LB-2678-20-ASPO							291×245×495
LB-2678-20-C-NF					N-F	500	279×233×557
LB-2678-20-C-NFSPO							291×245×562
LB-2678-20-C-SF					SMA-F	50	279×233×557
LB-2678-20-C-SFSPO							291×245×562
LB-3582-10-A	3.5-8.2	10	Linear	1.5	FPWRD350D24	-	103×83×147
LB-3582-10-ASPO							115×95×153
LB-3582-10-C-NF					N-F	150	103×83×205
LB-3582-10-C-NFSPO							115×95×211
LB-3582-10-C-SF					SMA-F	50	103×83×205
LB-3582-10-C-SFSPO							115×95×211
LB-3582-15-A	3.5-8.2	15	Linear	1.5	FPWRD350D24	-	157×131×227
LB-3582-15-ASPO							169×143×233
LB-3582-15-C-NF					N-F	150	157×131×284.7
LB-3582-15-C-NFSPO							169×143×291
LB-3582-15-C-SF					SMA-F	50	157×131×284.7
LB-3582-15-C-SFSPO							169×143×291

Multi Octave Horn Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-475110-10-A	4.75-11.0	10	Linear	1.5	FPWRD475D24	-	73×58×105
LB-475110-10-ASPO							83×68×108
LB-475110-10-C-NF					N-F	150	73×65.4×149.7
LB-475110-10-C-NFSPO							83×70.4×152.7
LB-475110-10-C-SF					SMA-F	50	73×58×149.7
LB-475110-10-C-SFSPO							83×68×152.7
LB-475110-15-A	4.75-11.0	15	Linear	1.5	FPWRD475D24	-	116×97×171
LB-475110-15-ASPO							122×103×174
LB-475110-15-C-NF					N-F	150	116×97×215.7
LB-475110-15-C-NFSPO							122×103×218.7
LB-475110-15-C-SF					SMA-F	50	116×97×215.7
LB-475110-15-C-SFSPO							122×103×218.7
LB-58160-10-A	5.8-16.0	10	Linear	1.5	FPWRD580D28	-	65×51×98
LB-58160-10-ASPO							71×57×101
LB-58160-10-C-NF					N-F	150	65×59.5×141
LB-58160-10-C-NFSPO							71×62.5×144
LB-58160-10-C-SF					SMA-F	50	65×51×141
LB-58160-10-C-SFSPO							71×57×144
LB-58160-15-A	5.8-16.0	15	Linear	1.5	FPWRD580D28	-	84×71×124
LB-58160-15-ASPO							90×77×127
LB-58160-15-C-NF					N-F	150	84×71×167
LB-58160-15-C-NFSPO							90×77×170
LB-58160-15-C-SF					SMA-F	50	84×71×167
LB-58160-15-C-SFSPO							90×77×170
LB-58160-20-A	5.8-16.0	20	Linear	1.5	FPWRD580D28	-	134×111.9×243
LB-58160-20-ASPO							134×111.9×246
LB-58160-20-C-NF					N-F	150	134×111.9×285.7
LB-58160-20-C-NFSPO							140×118×288.7
LB-58160-20-C-SF					SMA-F	50	134×111.9×285.7
LB-58160-20-C-SFSPO							140×118×288.7
LB-60180-10-A	6.0-18.0	10	Linear	1.5	FPWRD650D28	-	55×44×73
LB-60180-10-ASPO							63×52×76
LB-60180-10-C-NF					N-F	150	55×55.1×109
LB-60180-10-C-NFSPO							63×59.1×112
LB-60180-10-C-SF					SMA-F	50	55×44×109
LB-60180-10-C-SFSPO							63×52×112
LB-60180-10-C-HNF					HP N-F	500	55×50.5×109
LB-60180-10-C-HNFSPO							63×54.5×112



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Multi Octave Horn Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-60180-15-A	6.0-18.0	15	Linear	1.5	FPWRD650D28	-	78×65.5×116
LB-60180-15-ASPO							86×73×119
LB-60180-15-C-NF					N-F	150	78×65.9×152
LB-60180-15-C-NFSPO							86×73×155
LB-60180-15-C-SF					SMA-F	50	78×65.9×152
LB-60180-15-C-SFSPO							86×73×155
LB-60180-15-C-HNF					HP N-F	500	78×65.9×158.3
LB-60180-15-C-HNFSPO							86×73×161.3
LB-60180-20-A	6.0-18.0	20	Linear	1.5	FPWRD650D28	-	124×104×226
LB-60180-20-ASPO							132×112×229
LB-60180-20-C-NF					N-F	150	124×104×262
LB-60180-20-C-NFSPO							132×112×265
LB-60180-20-C-SF					SMA-F	50	124×104×262
LB-60180-20-C-SFSPO							132×112×265
LB-60180-20-C-HNF					HP N-F	500	124×104×268.3
LB-60180-20-C-HNFSPO							132×112×271.3
LB-60180-23-A	6.0-18.0	23	Linear	1.25	FPWRD650D28	-	194.4 x 168.5 x 330
LB-60180-23-ASPO							-
LB-60180-23-C-NF					N-F	150	194.4 x 168.5 x 366
LB-60180-23-C-NFSPO							-
LB-60180-23-C-SF					SMA-F	50	194.4 x 168.5 x 366
LB-60180-23-C-SFSPO							-
LB-60180-23-C-HNF					HP N-F	500	194.4 x 168.5 x 366
LB-60180-23-C-HNFSPO							-
LB-60180-25-A	6.0-18.0	25	Linear	1.5	FPWRD650D28	-	229×200×710
LB-60180-25-ASPO							241×200×716
LB-60180-25-C-NF					N-F	150	229×200×746
LB-60180-25-C-NFSPO							241×200×752
LB-60180-25-C-SF					SMA-F	50	229×200×746
LB-60180-25-C-SFSPO							241×200×752
LB-60180-25-C-HNF					HP N-F	500	229×200×746
LB-60180-25-C-HNFSPO							241×200×752
LB-65180-10-A	6.5-18	10	Linear	1.5	FPWRD650D28	-	55×44×73
LB-65180-10-ASPO							63×52×76
LB-65180-10-C-NF					N-F	150	55×55.1×109
LB-65180-10-C-NFSPO							63×59.1×112
LB-65180-10-C-SF					SMA-F	50	55×44×109
LB-65180-10-C-SFSPO							63×52×112
LB-65180-10-C-HNF					HP N-F	500	55×50.5×115.3
LB-65180-10-C-HNFSPO							63×54.5×118.3



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Multi Octave Horn Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-65180-15-A	6.5-18	15	Linear	1.5	FPWRD650D28	-	78×65.5×116
LB-65180-15-ASPO							86×73×119
LB-65180-15-C-NF					N-F	150	78×65.9×152
LB-65180-15-C-NFSPO							86×73×155
LB-65180-15-C-SF					SMA-F	50	78×65.5×152
LB-65180-15-C-SFSPO							86×73×155
LB-65180-15-C-HNF					HP N-F	500	78×65.5×158.3
LB-65180-15-C-HNFSPO							86×73×161.3
LB-65180-20-A	6.5-18	20	Linear	1.5	FPWRD650D28	-	124×104×226
LB-65180-20-ASPO							132×112×229
LB-65180-20-C-NF					N-F	150	124×104×262
LB-65180-20-C-NFSPO							132×112×265
LB-65180-20-C-SF					SMA-F	50	124×104×262
LB-65180-20-C-SFSPO							132×112×265
LB-65180-20-C-HNF					HP N-F	500	124×104×268.3
LB-65180-20-C-HNFSPO							132×112×271.3
LB-65180-23-A	6.5-18	23	Linear	1.25	FPWRD650D28	-	194.4×168.5×330
LB-65180-23-ASPO							201.8×174.5×336
LB-65180-23-C-NF					N-F	150	194.4×168.5×366
LB-65180-23-C-NFSPO							201.8×174.5×372
LB-65180-23-C-SF					SMA-F	50	194.4×168.5×366
LB-65180-23-C-SFSPO							201.8×174.5×372
LB-65180-23-C-HNF					HP N-F	500	194.4×168.5×372.3
LB-65180-23-C-HNFSPO							201.8×174.5×378.3
LB-65180-25-A	6.5-18	25	Linear	1.5	FPWRD650D28	-	229×200×710
LB-65180-25-ASPO							241×200×716
LB-65180-25-C-NF					N-F	150	229×200×746
LB-65180-25-C-NFSPO							241×200×752
LB-65180-25-C-SF					SMA-F	50	229×200×746
LB-65180-25-C-SFSPO							241×200×752
LB-65180-25-C-HNF					HP N-F	500	229×200×746
LB-65180-25-C-HNFSPO							241×200×752



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Multi Octave Horn Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-75180-10-A	7.5-18	10	Linear	1.5	FPWRD750D24	-	48×39×65
LB-75180-10-ASPO							56×47×68
LB-75180-10-C-SF					SMA-F	50	48×39×96.7
LB-75180-10-C-SFSPO							56×47×99.7
LB-75180-10-C-NF					N-F	150	48×52.6×96.7
LB-75180-10-C-NFSPO							56×56.6×99.7
LB-75180-10-C-HNF					HP N-F	500	48×47.6×96.7
LB-75180-10-C-HNFSPO							56×51.6×99.7
LB-75180-15-A	7.5-18	15	Linear	1.5	FPWRD750D24	-	74.5×62.4×112
LB-75180-15-ASPO							84×72×115
LB-75180-15-C-SF					SMA-F	50	74.5×62.4×143.7
LB-75180-15-C-SFSPO							84×72×146.7
LB-75180-15-C-NF					N-F	150	74.5×64.3×143.7
LB-75180-15-C-NFSPO							84×72×146.7
LB-75180-15-C-HNF					HP N-F	500	74.5×62.4×147.3
LB-75180-15-C-HNFSPO							84×72×146.7
LB-75180-20-A	7.5-18	20	Linear	1.5	FPWRD750D24	-	108×90×206
LB-75180-20-ASPO							118×100×209
LB-75180-20-C-SF					SMA-F	50	108×90×237.7
LB-75180-20-C-SFSPO							118×100×240.7
LB-75180-20-C-NF					N-F	150	108×90×237.7
LB-75180-20-C-NFSPO							118×100×240.7
LB-75180-20-C-HNF					HP N-F	500	108×90×237.7
LB-75180-20-C-HNFSPO							118×100×240.7
LB-110265-10-A	11-26.5	10	Linear	1.5	FPWRD110C24	-	32×26×47
LB-110265-10-ASPO							38×32×50
LB-110265-10-C-SF					SMA-F	50	32×30.2×71
LB-110265-10-C-SFSPO							38×33.2×74
LB-110265-15-A	11-26.5	15	Linear	1.5	FPWRD110C24	-	52×43×88
LB-110265-15-ASPO							58×49×91
LB-110265-15-C-SF					SMA-F	50	52×43×112
LB-110265-15-C-SFSPO							58×49×115
LB-110265-20-A	11-26.5	20	Linear	1.5	FPWRD110C24	-	75.1×70×139
LB-110265-20-ASPO							81×70×142
LB-110265-20-C-SF					SMA-F	50	75.1×70×163
LB-110265-20-C-SFSPO							81×70×166

Multi Octave Horn Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Size (mm)
LB-180400-10-A	18.0-40.0	10	Linear	1.5	FPWRD180C24	-	22.4×22.4×29.8
LB-180400-10-ASPO							26×23×31.8
LB-180400-10-C-KF					2.92mm-F	20	22.4×26.3×55.8
LB-180400-10-C-KFSPO							26×26.6×57.8
LB-180400-10-C-KM					2.92mm-M	20	22.4×26.3×55.8
LB-180400-10-C-2.4F					2.4mm-F	10	22.4×27.6×55.8
LB-180400-10-C-2.4FSPO							26×27.9×57.8
LB-180400-15-A	18.0-40.0	15	Linear	1.5	FPWRD180C24	-	32×27×45
LB-180400-15-ASPO							38×33×47
LB-180400-15-C-KF					2.92mm-F	20	32×28.6×71
LB-180400-15-C-KFSPO							38×33×73
LB-180400-15-C-KM					2.92mm-M	20	32×28.6×71
LB-180400-15-C-2.4F					2.4mm-F	10	32×29.9×71
LB-180400-15-C-2.4FSPO							38×33×73
LB-180400-20-A	18.0-40.0	20	Linear	1.5	FPWRD180C24	-	55×55×87
LB-180400-20-ASPO							55×55×89.5
LB-180400-20-C-KF					2.92mm-F	20	55×55×113
LB-180400-20-C-KFSPO							55×55×115.5
LB-180400-20-C-KM					2.92mm-M	20	55×55×113
LB-180400-20-C-2.4F					2.4mm-F	10	55×55×113
LB-180400-20-C-2.4FSPO							55×55×115.5
LB-180400-25-A	18.0-40.0	25	Linear	1.5	FPWRD180C24	-	95×95×263
LB-180400-25-ASPO							100×95×265.5
LB-180400-25-C-KF					2.92mm-F	20	95×95×289
LB-180400-25-C-KFSPO							100×95×291.5
LB-180400-25-C-KM					2.92mm-M	20	95×95×289
LB-180400-25-C-2.4F					2.4mm-F	10	95×95×289
LB-180400-25-C-2.4FSPO							100×95×291.5



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Dual Polarization Horn Antenna

Dual Polarization Horn Antenna

1. Broadband Dual Polarization Horn Antenna



Model	Freq. (GHz)	Pol.	Gain (dBi) Typ.	Cross Pol. (dB) Min.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-SJ-10100-SF	1.0-10.0	Dual Linear	10	18	1.5	SMA-F	50	204×204×211
LB-SJ-10100-SFSPO								217×217×217
LB-SJ-10100-NF						N-F	50	204×204×211
LB-SJ-10100-NFSPO								217×217×217
LB-SJ-20180-SF	2.0-18.0	Dual Linear	14	20	1.5	SMA-F	25	107.7×107.7×132
LB-SJ-20180-SFSPO								116×116×136
LB-SJ-20180-NF						N-F		107.7×107.7×132
LB-SJ-20180-NFSPO								116×116×136
LB-SJ-20180SA-SF	2.0-18.0	Dual Linear	10	20	2.0	SMA-F	25	75.8 x 75.8 x 101
LB-SJ-20180SA-NF						N-F		75.8 x 75.8 x 101
LB-SJ-30400-KF	3.0-40.0	Dual Linear	12	15	1.5	2.92mm-F	20	54.5×54.5×90
LB-SJ-30400-KFSPO								61×61×93
LB-SJ-30400-2.4F						2.4mm-F	10	54.5×54.5×90
LB-SJ-30400-2.4FSPO								61×61×93
LB-SJ-40180-SF	4.0-18.0	Dual Linear	14	20	1.5	SMA-F	25	107.7×107.7×132
LB-SJ-40180-SFSPO								116×116×136
LB-SJ-40180-NF						N-F		107.7×107.7×132
LB-SJ-40400-KF	4.0-40.0	Dual Linear	12	20	1.5	2.92mm-F	20	54.5×54.5×90
LB-SJ-40400-KFSPO								61×61×93
LB-SJ-40400-2.4F						2.4mm-F	10	54.5×54.5×90
LB-SJ-40400-2.4FSPO								61×61×93



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Dual Polarization Horn Antenna

Model	Freq. (GHz)	Pol.	Gain (dBi) Typ.	Cross Pol. (dB) Min.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-SJ-50500-2.4F	5.0-50.0	Dual Linear	12	20	1.5	2.4mm-F	10	44.5×44.5×77.6
LB-SJ-50500-1.85F						1.85mm-F	5	44.5×44.5×77.6
LB-SJ-60180-SF	6.0-18.0	Dual Linear	12	20	2	SMA-F	25	43.1×43.1×79.5
LB-SJ-60180-SFSPO								52×52×82.5
LB-SJ-60245-SF	6.0-24.5	Dual Linear	14	20	2	SMA-F	25	43.1×43.1×79.5
LB-SJ-60245-SFSPO								52×52×82.5
LB-SJ-180400-KF	18.0-40.0	Dual Linear	15	20	2	2.92mm(K)-F	10	34.9×34.9×61.5
LB-SJ-180400-KFSPO								36.9×36.9×64.5
LB-SJ-180400-2.4F						2.4mm-F	10	34.9×34.9×61.5
LB-SJ-180400-2.4FSPO								36.9×36.9×64.5
LB-SJ-180400L-KF	18.0-40.0	Dual Linear	8	20	1.5	2.92mm(K)-F	10	28.9×28.9×61.5
LB-SJ-180400L-2.4F						2.4mm-F	10	28.9×28.9×61.5
LB-SJ-180400L-1.85F						1.85mm-F	5	28.9×28.9×61.5
LB-SJ-180435-2.4F	18.0-43.5	Dual Linear	15	20	2	2.4mm-F	10	36.2×36.2×61.5
LB-SJ-180435-2.4FSPO								38.2×38.2×64.5
LB-SJ-180500-2.4F	18.0-50.0	Dual Linear	15	20	1.5	2.4mm-F	10	33.4×33.4×61.5
LB-SJ-180500-2.4FSPO								33.4×33.4×64.5
LB-SJ-180500-1.85F						1.85mm-F	5	33.4×33.4×61.5
LB-SJ-180500-1.85FSPO								33.4×33.4×64.5
LB-SJ-180500L-2.4F	18.0-50.0	Dual Linear	8	20	2	2.4mm-F	10	30.2×30.2×61.5
LB-SJ-180500L-1.85F						1.85mm-F	5	30.2×30.2×61.5
LB-SJ-180540-2.4F	18.0-54.0	Dual Linear	14	20	1.5	2.4mm-F	10	44.5×44.5×77.6
LB-SJ-180540-1.85F						1.85mm-F	5	44.5×44.5×77.6
LB-SJ-180540B-2.4F	18.0-54.0	Dual Linear	15	20	1.5	2.4mm-F	10	33.4×33.4×61.5
LB-SJ-180540B-2.4FSPO								33.4×33.4×64.5
LB-SJ-180540BL-2.4F	18.0-54.0	Dual Linear	8	20	2	2.4mm-F	10	30.2×30.2×61.5
LB-SJ-180540BL-1.85F						1.85mm-F	10	30.2×30.2×61.5
LB-SJ-180550B-1.85F	18.0-55.0	Dual Linear	15	20	1.5	1.85mm-F	5	33.9×33.9×61.5
LB-SJ-180550B-1.85FSPO								33.9×33.9×64.5
LB-SJ-180550BL-1.85F	18.0-55.0	Dual Linear	8	20	2	1.85mm-F	5	30.7×30.7×61.5
LB-SJ-180670-1.85F	18.0-67.0	Dual Linear	15	20	1.8	1.85mm-F	5	33.9×33.9×61.5
LB-SJ-180670L-1.85F	18.0-67.0	Dual Linear	11	20	1.8	1.85mm-F	5	30.7×30.7×61.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Horn Antenna

2. Conical Dual Polarization Horn Antenna



Model	Freq. (GHz)	Gain (dBi) Typ.	Pol.	Cross Pol. (dB) Min.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-CSJ-20180-SF	2.0-18.0	16	Dual Linear	20	1.5	SMA-F	25	124×124×241
LB-CSJ-20180-SFSPO								130×130×244
LB-CSJ-20180-NF						N-F		124×124×241
LB-CSJ-20180-NFSPO								130×130×244
LB-CSJ-20200-SF	2.0-20.0	16	Dual Linear	20	2	SMA-F	25	124×124×241
LB-CSJ-20200-SFSPO								130×130×244
LB-CSJ-20200-NF						N-F		124×124×241
LB-CSJ-20200-NFSPO								130×130×244
LB-CSJ-40400-KF	4.0-40.0	16	Dual Linear	20	2	2.92mm(K)-F	10	62×62×164.5
LB-CSJ-40400-KFSPO								67×67×167
LB-CSJ-40400-2.4F						2.4mm-F		62×62×164.5
LB-CSJ-40400-2.4FSPO								67×67×167



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Horn Antenna

3. Open Boundary Quad-Ridged Horn Antenna



Model	Freq. (GHz)	Gain (dBi) Typ.	Pol.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-OSJ-0380-NF	0.3-8.0	12	Dual Linear	2	N-F	50	577.6 x 577.6 x 570.3
LB-OSJ-0380-SF					SMA-F	50	577.6 x 577.6 x 570.3
LB-OSJ-0380-3.5F					3.5mm-F	50	577.6 x 577.6 x 570.3
LB-OSJ-0460-SF	0.4-6.0	12	Dual Linear	1.5	SMA-F	50	510×510×550
LB-OSJ-0460-NF					N-F	50	510×510×550
LB-OSJ-0760-SF	0.7-6.0	11	Dual Linear	2	SMA-F	50	310×310×411
LB-OSJ-0760-NF					N-F	50	310×310×411
LB-OSJ-07100-SF	0.7-10.0	11	Dual Linear	2	SMA-F	50	310×310×412
LB-OSJ-07100-NF					N-F	50	310×310×412
LB-OSJ-07120-SF	0.7-12.0	12	Dual Linear	2	SMA-F	50	265.4×265.4×258.2
LB-OSJ-07120-NF					N-F	50	265.4×265.4×258.2
LB-OSJ-10180-SF	1.0-18.0	10	Dual Linear	2	SMA-F	50	190.1×190.1×186.1
LB-OSJ-10180-NF					N-F	50	190.1×190.1×186.1
LB-OSJ-10200-SF	1.0-20.0	10	Dual Linear	2	SMA-F	50	190.1×190.1×186.1
LB-OSJ-10200-NF					N-F	50	190.1×190.1×186.1
LB-OSJ-20180-SF	2.0-18.0	13	Dual Linear	2	SMA-F	50	140.14×140.14×196.46
LB-OSJ-20500L-2.4F	2.0-50.0	10	Dual Linear	2	2.4mm-F	10	90 x 52.9 x 52.9
LB-OSJ-20500L-1.85F					1.85mm-F	5	90 x 52.9 x 52.9



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Horn Antenna

4. Options for Dual Polarization Horn Antenna



Option	Description
P01	Convert to LHCP
P02	Convert to RHCP
P03	Convert to Dual Circular
P04	Convert to Vertical, Horizontal, LHCP, RHCP Switchable

Model	Freq. (GHz)	Gain (dBi) Typ.	Pol.	VSWR Typ.	Connector	Power Handling (W) CW Max	Size (mm)
LB-OSJ-0760-P01	0.7-6.0	10	LHCP	1.5	SMA-F	50	310×310×429
LB-OSJ-0760-P02	0.7-6.0	10	RHCP	1.5	SMA-F	50	310×310×429
LB-OSJ-0760-P03	0.7-6.0	10	Dual Circular	1.5	SMA-F	50	310×310×429
LB-OSJ-0760-P04	0.7-6.0	8	Switchable Pol.	2.5	SMA-F	20	310×310×535
LB-OSJ-07100-P01	0.7-10.0	10	LHCP	1.5	SMA-F	50	310×310×430
LB-OSJ-07100-P02	0.7-10.0	10	RHCP	1.5	SMA-F	50	310×310×430
LB-OSJ-07100-P03	0.7-10.0	10	Dual Circular	1.5	SMA-F	50	310×310×430
LB-OSJ-07100-P04	0.7-10.0	9	Switchable Pol.	2.5	SMA-F	20	310×310×537
LB-OSJ-07120-P01	0.7-12.0	10	LHCP	1.5	SMA-F	20	265.4×265.4×403.2
LB-OSJ-07120-P02	0.7-12.0	10	RHCP	1.5	SMA-F	20	265.4×265.4×403.2
LB-OSJ-07120-P03	0.7-12.0	10	Dual Circular	1.5	SMA-F	20	265.4×265.4×403.2



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Horn Antenna

Model	Freq. (GHz)	Gain (dBi) Typ.	Pol.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-OSJ-10180-P01	1.0-18.0	10	LHCP	1.5	SMA-F	20	190.1×190.1×337.1
LB-OSJ-10180-P02	1.0-18.0	10	RHCP	1.5	SMA-F	20	190.1×190.1×337.1
LB-OSJ-10180-P03	1.0-18.0	10	Dual Circular	1.5	SMA-F	20	190.1×190.1×337.1
LB-OSJ-20180-P01	2.0-18.0	11.5	LHCP	1.5	SMA-F	20	140×140×237.5
LB-OSJ-20180-P02	2.0-18.0	11.5	RHCP	1.5	SMA-F	20	140×140×237.5
LB-OSJ-20180-P03	2.0-18.0	11.5	Dual Circular	1.5	SMA-F	20	140×140×237.5
LB-SJ-10100-P01	1.0-10.0	11	LHCP	1.5	SMA-F	20	204×204×258
LB-SJ-10100-P01SPO	1.0-10.0						217×217×264
LB-SJ-10100-P02	1.0-10.0	11	RHCP	1.5	SMA-F	20	204×204×258
LB-SJ-10100-P02SPO	1.0-10.0						217×217×264
LB-SJ-10100-P03	1.0-10.0	11	Dual Circular	1.5	SMA-F	20	204×204×258
LB-SJ-10100-P03SPO	1.0-10.0						217×217×264
LB-SJ-20180-P01	2.0-18.0	11	LHCP	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-20180-P01SPO	2.0-18.0						116×116×228.5
LB-SJ-20180-P02	2.0-18.0	11	RHCP	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-20180-P02SPO	2.0-18.0						116×116×228.5
LB-SJ-20180-P03	2.0-18.0	11	Dual Circular	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-20180-P03SPO	2.0-18.0						116×116×228.5
LB-SJ-40180-P01	4.0-18.0	11	LHCP	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-40180-P01SPO	4.0-18.0						116×116×228.5
LB-SJ-40180-P02	4.0-18.0	11	RHCP	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-40180-P02SPO	4.0-18.0						116×116×228.5
LB-SJ-40180-P03	4.0-18.0	11	Dual Circular	1.5	SMA-F	20	107.7×107.7×224.5
LB-SJ-40180-P03SPO	4.0-18.0						116×116×228.5
LB-SJ-40400-P01	4.0-40.0	11	LHCP	1.5	2.92mm(K)-F	20	79.4×71.3×167
LB-SJ-40400-P02	4.0-40.0	11	RHCP	1.5	2.92mm(K)-F	20	79.4×71.3×167
LB-SJ-40400-P03	4.0-40.0	11	Dual Circular	1.5	2.92mm(K)-F	20	71.9×71.3×167



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Horn Antenna

Model	Freq. (GHz)	Gain (dBi) Typ.	Pol.	VSWR Typ.	Connector	Power Handling (W) CW	Size (mm)
LB-SJ-60180-P01	6.0-18.0	12	LHCP	1.5	SMA-F	20	62.9×71.7×154.5
LB-SJ-60180-P01SPO							63.2×71.7×157.5
LB-SJ-60180-P02	6.0-18.0	12	RHCP	1.5	SMA-F	20	62.9×71.7×154.5
LB-SJ-60180-P02SPO							63.2×71.7×157.5
LB-SJ-60180-P03	6.0-18.0	12	Dual Circular	1.5	SMA-F	20	62.9×63.6×154.5
LB-SJ-60180-P03SPO							63.2×68.1×157.5
LB-SJ-60245-P01	6.0-24.5	13	LHCP	1.5	SMA-F	20	62.9×71.7×154.5
LB-SJ-60245-P01SPO							63.2×71.7×157.5
LB-SJ-60245-P02	6.0-24.5	13	RHCP	1.5	SMA-F	20	62.9×63.6×154.5
LB-SJ-60245-P02SPO							63.2×68.1×157.5
LB-SJ-60245-P03	6.0-24.5	13	Dual Circular	1.5	SMA-F	20	62.9×71.7×154.5
LB-SJ-60245-P03SPO							63.2×71.7×157.5
LB-SJ-180400-P01	18.0-40.0	13	LHCP	1.5	2.92mm(K)-F	20	57.2×72.2×126.5
LB-SJ-180400-P01SPO							57.2×72.2×129.5
LB-SJ-180400-P02	18.0-40.0	13	RHCP	1.5	2.92mm(K)-F	20	57.2×72.2×126.5
LB-SJ-180400-P02SPO							57.2×72.2×129.5
LB-SJ-180400-P03	18.0-40.0	13	Dual Circular	1.5	2.92mm(K)-F	20	57.2×64.5×126.5
LB-SJ-180400-P03SPO							57.2×68.8×129.5



pradeep@rfconnector.in


9810138894

www.synergyppl.com


Standard Gain Horn Antenna

Standard Gain Horn Antenna

A Type:

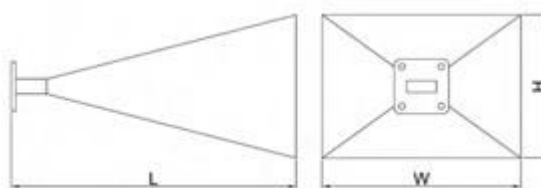

C Type:

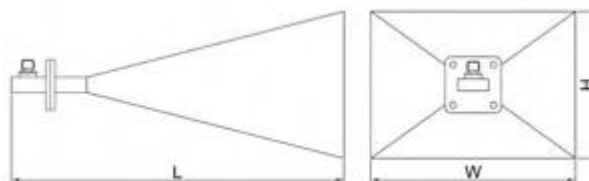

The LB series standard gain horn antennas are linearly polarized and provide an efficient low cost means of making measurements. A-INFO's standard gain horn antenna can cover from 320MHz to 750GHz frequency range. These horns are ideally suited for EMI testing, direction finding, surveillance, antenna gain and Pattern measurements and other applications.

Model Information

Example Part Number:

LB

-90

-10

-C

-SF

Product Code

Waveguide Size: WR2300 to WR1.5

Gain in dB, Standard gain is 10dB, 15dB, 20dB, 25dB

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-

Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male;

1.0F=1.0mm-Female; 1.0M=1.0mm-Male



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Calibration Option

Far Field Calibration Data with Extra Fee

Horn Antenna Accessories

1. Mounting Bracket
2. Tripod
3. Radome
4. Carrying Case

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-2300-10-A	0.32-0.49	WR2300	Linear	10	FDP3	1.15	Al	1068×770×970
LB-2300-10-ASPO								1108×810×984
LB-2300-10-C-NF					NF	1.25		1068×770×1502
LB-2300-10-C-NFSPO								1108×810×1516
LB-2300-10-C-SF					SF			1068×770×1502
LB-2300-10-C-SFSPO								1108×810×1516
LB-2300-10-C-7/16F					7/16F			1068×770×1502
LB-2300-10-C-7/16FSPO								1108×810×1516
LB-2100-10-A	0.35-0.53	WR2100	Linear	10	FDP4	1.15	Al	975×704×948
LB-2100-10-ASPO								1015×744×962
LB-2100-10-C-NF					NF	1.25		975×704×1434
LB-2100-10-C-NFSPO								1015×744×1448
LB-2100-10-C-SF					SF			975×704×1434
LB-2100-10-C-SFSPO								1015×744×1448
LB-2100-10-C-7/16F					7/16F			975×704×1434
LB-2100-10-C-7/16FSPO								1015×744×1448
LB-1800-10-A	0.41-0.62	WR1800	Linear	10	FDP5	1.15	Al	837×604×812
LB-1800-10-ASPO								853×620×817
LB-1800-10-C-NF					NF	1.25		837×604×1229
LB-1800-10-C-NFSPO								853×620×1234
LB-1800-10-C-SF					SF			837×604×1229
LB-1800-10-C-SFSPO								853×620×1234
LB-1800-10-C-7/16F					7/16F			837×604×1229
LB-1800-10-C-7/16FSPO								853×620×1234



pradeep@rfconnector.in



9810138894



www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-1500-10-A	0.49-0.75	WR1500	Linear	10	FDP6	1.15	Al	698×504×677
LB-1500-10-ASPO								714×520×682
LB-1500-10-C-NF					NF	1.25		698×504×1025
LB-1500-10-C-NFSPO								714×520×1030
LB-1500-10-C-SF					SF			698×504×1025
LB-1500-10-C-SFSPO								714×520×1030
LB-1500-10-C-7/16F					7/16F			698×504×1025
LB-1500-10-C-7/16FSPO								714×520×1030
LB-1150-10-A	0.64-0.96	WR1150	Linear	10	FDP8	1.15	Al	535.8×388×520
LB-1150-10-ASPO								555.2×407.2×527
LB-1150-10-C-NF					NF	1.25		535.8×388×788
LB-1150-10-C-NFSPO								555.2×407.2×793
LB-1150-10-C-SF					SF			535.8×388×788
LB-1150-10-C-SFSPO								555.2×407.2×793
LB-1150-10-C-7/16F					7/16F			535.8×388×788
LB-1150-10-C-7/16FSPO								555.2×407.2×793
LB-975-10-A	0.75-1.12	WR975	Linear	10	FDP9	1.15	Al	454×328×440
LB-975-10-ASPO								470×344×444
LB-975-10-C-NF					NF	1.25		454×328×671
LB-975-10-C-NFSPO								470×344×675
LB-975-10-C-SF					SF			454×328×671
LB-975-10-C-SFSPO								470×344×675
LB-975-10-C-7/16F					7/16F			454×328×671
LB-975-10-C-7/16FSPO								470×344×675
LB-975-15-A	0.75-1.12	WR975	Linear	15	FDP9	1.15	Al	834×619×619
LB-975-15-ASPO								850×635×623
LB-975-15-C-NF					NF	1.25		834×619×850
LB-975-15-C-NFSPO								850×635×854
LB-975-15-C-SF					SF			834×619×850
LB-975-15-C-SFSPO								850×635×854
LB-975-15-C-7/16F					7/16F			834×619×850
LB-975-15-C-7/16FSPO								850×635×854
LB-770-10-A	0.96-1.45	WR770	Linear	10	FDP12	1.15	Al	384×284×360
LB-770-10-ASPO								400×300×364
LB-770-10-C-NF					NF	1.25		384×284×526
LB-770-10-C-NFSPO								400×300×530
LB-770-10-C-SF					SF			384×284×526
LB-770-10-C-SFSPO								400×300×530
LB-770-10-C-7/16F					7/16F			384×284×526
LB-770-10-C-7/16FSPO								400×300×530



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-770-15-A	0.96-1.45	WR770	Linear	15	FDP12	1.15	Al	667×501×583
LB-770-15-ASPO								683×517×587
LB-770-15-C-NF					NF	1.25		667×501×749
LB-770-15-C-NFSPO								683×517×753
LB-770-15-C-SF					SF			667×501×749
LB-770-15-C-SFSPO								683×517×753
LB-770-15-C-7/16F					7/16F			667×501×749
LB-770-15-C-7/16FSPO								683×517×753
LB-650-10-A	1.12-1.7	WR650	Linear	10	FDP14	1.15	Al	315×235×278
LB-650-10-ASPO								331×251×282
LB-650-10-C-NF					NF	1.25		315×235×428
LB-650-10-C-NFSPO								331×251×432
LB-650-10-C-SF					SF			315×235×428
LB-650-10-C-SFSPO								331×251×432
LB-650-10-C-7/16F					7/16F			315×235×428
LB-650-10-C-7/16FSPO								331×251×432
LB-650-15-A	1.12-1.7	WR650	Linear	15	FDP14	1.15	Al	564×424×500
LB-650-15-ASPO								582×442×504
LB-650-15-C-NF					NF	1.25		564×424×650
LB-650-15-C-NFSPO								582×442×654
LB-650-15-C-SF					SF			564×424×650
LB-650-15-C-SFSPO								582×442×654
LB-650-15-C-7/16F					7/16F			564×424×650
LB-650-15-C-7/16FSPO								582×442×654
LB-650-20-A	1.12-1.7	WR650	Linear	20	FDP14	1.15	Al	919.8×779.8×1525
LB-650-20-ASPO								937×797×1529
LB-650-20-C-NF					NF	1.25		919.8×779.8×1675
LB-650-20-C-NFSPO								937×797×1682
LB-650-20-C-SF					SF			919.8×779.8×1675
LB-650-20-C-SFSPO								937×797×1682
LB-650-20-C-7/16F					7/16F			919.8×779.8×1675
LB-650-20-C-7/16FSPO								937×797×1682
LB-510-10-A	1.45-2.2	WR510	Linear	10	FDP18	1.15	Al	249×184×425
LB-510-10-ASPO								260×195×430
LB-510-10-C-NF					NF	1.25		249×184×536
LB-510-10-C-NFSPO								260×195×541
LB-510-10-C-SF					SF			249×184×536
LB-510-10-C-SFSPO								260×195×541
LB-510-10-C-7/16F					7/16F			249×184×536
LB-510-10-C-7/16FSPO								260×195×541



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-510-15-A	1.45-2.2	WR510	Linear	15	FDP18	1.15	Al	441×327×400
LB-510-15-ASPO								457×343×407.5
LB-510-15-C-NF					1.25			441×327×511
LB-510-15-C-NFSPO								457×343×518.5
LB-510-15-C-SF								441×327×511
LB-510-15-C-SFSPO								457×343×518.5
LB-510-15-C-7/16F								441×327×511
LB-510-15-C-7/16FSPO					457×343×518.5			
LB-430-10-A	1.7-2.6	WR430	Linear	10	FDP22	1.2	Al	208×153×390
LB-430-10-ASPO								216×161×393
LB-430-10-C-NF					1.25			208×153×490
LB-430-10-C-NFSPO								216×161×493
LB-430-10-C-SF								208×153×490
LB-430-10-C-SFSPO								216×161×493
LB-430-10-C-7/16F								208×153×490
LB-430-10-C-7/16FSPO					216×161×493			
LB-430-15-A	1.7-2.6	WR430	Linear	15	FDP22	1.15	Al	375×279×375
LB-430-15-ASPO								389×293×380.5
LB-430-15-C-NF					1.25			375×279×475
LB-430-15-C-NFSPO								389×293×480.5
LB-430-15-C-SF								375×279×475
LB-430-15-C-SFSPO								389×293×480.5
LB-430-15-C-7/16F								375×279×475
LB-430-15-C-7/16FSPO					389×293×480.5			
LB-430-20-A	1.7-2.6	WR430	Linear	20	FDP22	1.15	Al	614×518×1095
LB-430-20-ASPO								630×534×1099
LB-430-20-C-NF					1.25			614×518×1195
LB-430-20-C-NFSPO								630×534×1199
LB-430-20-C-SF								614×518×1195
LB-430-20-C-SFSPO								630×534×1199
LB-430-20-C-7/16F								614×518×1195
LB-430-20-C-7/16FSPO					630×534×1199			
LB-340-10-A	2.2-3.3	WR340	Linear	10	FDP26	1.15	Al	163×122.9×270
LB-340-10-ASPO								172×130×273
LB-340-10-C-NF					1.3			163×122.9×362
LB-340-10-C-NFSPO								172×130×365
LB-340-10-C-SF								163×122.9×362
LB-340-10-C-SFSPO								172×130×365
LB-340-10-C-7/16F								163×122.9×362
LB-340-10-C-7/16FSPO					172×130×365			



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)	
LB-340-15-A	2.2-3.3	WR340	Linear	15	FDP26	1.15	Al	308.6×237.7×294	
LB-340-15-ASPO								322×251×300	
LB-340-15-C-NF					1.25	308.6×237.7×386			
LB-340-15-C-NFSPO								NF	322×251×392
LB-340-15-C-SF								SF	308.6×237.7×386
LB-340-15-C-SFSPO									322×251×392
LB-340-15-C-7/16F								7/16F	308.6×237.7×386
LB-340-15-C-7/16FSPO									322×251×392
LB-340-20-A	2.2-3.3	WR340	Linear	20	FDP26	1.15	Al	485.8×410.9×870	
LB-340-20-ASPO								506×431×874	
LB-340-20-C-NF					1.25	485.8×410.9×962			
LB-340-20-C-NFSPO								NF	506×431×966
LB-340-20-C-SF								SF	485.8×410.9×962
LB-340-20-C-SFSPO									506×431×966
LB-340-20-C-7/16F								7/16F	485.8×410.9×962
LB-340-20-C-7/16FSPO									506×431×966
LB-284-10-A	2.6-3.95	WR284	Linear	10	FDP32	1.15	Al	143×103×230	
LB-284-10-ASPO								150×110×233	
LB-284-10-C-NF					1.25	143×103×309			
LB-284-10-C-NFSPO								NF	150×110×312
LB-284-10-C-SF								SF	143×103×309
LB-284-10-C-SFSPO									150×110×312
LB-284-10-C-7/16F								7/16F	143×105×309
LB-284-10-C-7/16FSPO									150×110×312
LB-284-15-A	2.6-3.95	WR284	Linear	15	FDP32	1.15	Al	223.8×168.8×270	
LB-284-15-ASPO								231×176×273	
LB-284-15-C-NF					1.25	223.8×168.8×349			
LB-284-15-C-NFSPO								NF	231×176×352
LB-284-15-C-SF								SF	223.8×168.8×349
LB-284-15-C-SFSPO									231×176×352
LB-284-15-C-7/16F								7/16F	223.8×168.8×349
LB-284-15-C-7/16FSPO									231×176×352
LB-284-20-A	2.6-3.95	WR284	Linear	20	FDP32	1.15	Al	405×325×550	
LB-284-20-ASPO								421×341×557.5	
LB-284-20-C-NF					1.25	405×325×629			
LB-284-20-C-NFSPO								NF	421×341×636.5
LB-284-20-C-SF								SF	405×325×629
LB-284-20-C-SFSPO									421×341×636.5
LB-284-20-C-7/16F								7/16F	405×325×629
LB-284-20-C-7/16FSPO									421×341×636.5

 www.synergytpl.com

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)	
LB-229-10-A	3.3-4.9	WR229	Linear	10	FDP40	1.15	Al	113×79×160	
LB-229-10-ASPO								120×86×163	
LB-229-10-C-NF					1.25	113×80.5×225			
LB-229-10-C-NFSPO									120×86×228
LB-229-10-C-SF									113×79×225
LB-229-10-C-SFSPO									120×86×228
LB-229-10-C-TF									113×80.4×225
LB-229-10-C-TFSPO									120×86×228
LB-229-10-C-7									113×89.2×225
LB-229-10-C-7SPO									120×92.7×228
LB-229-10-C-3.5F									113×79×225
LB-229-10-C-3.5FSPO									120×86×228
LB-229-15-A								3.3-4.9	WR229
LB-229-15-ASPO			218×155×263						
LB-229-15-C-NF	1.25	211×148×325							
LB-229-15-C-NFSPO				218×155×328					
LB-229-15-C-SF				211×148×325					
LB-229-15-C-SFSPO				218×155×328					
LB-229-15-C-TF				211×148×325					
LB-229-15-C-TFSPO				218×155×328					
LB-229-15-C-7				211×148×325					
LB-229-15-C-7SPO				218×155×328					
LB-229-15-C-3.5F				211×148×325					
LB-229-15-C-3.5FSPO				218×155×328					
LB-229-20-A			3.3-4.9	WR229	Linear	20	FDP40		
LB-229-20-ASPO							358×277×394		
LB-229-20-C-NF	1.25	345×264×453							
LB-229-20-C-NFSPO								358×277×459	
LB-229-20-C-SF								345×264×453	
LB-229-20-C-SFSPO								358×277×459	
LB-229-20-C-TF								345×264×453	
LB-229-20-C-TFSPO								358×277×459	
LB-229-20-C-7								345×264×453	
LB-229-20-C-7SPO								358×277×459	
LB-229-20-C-3.5F								345×264×453	
LB-229-20-C-3.5FSPO								358×277×459	



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-187-10-A	3.95-5.85	WR187	Linear	10	FDP48	1.15	Al	93×69×190
LB-187-10-ASPO						1.25		100×76×193
LB-187-10-C-NF					NF	1.25		93×69.6×244
LB-187-10-C-NFSPO						1.5		100×76×247
LB-187-10-C-SF					SF	1.25		93×69×244
LB-187-10-C-SFSPO						1.5		100×76×247
LB-187-10-C-TF					TF	1.25		93×69.5×244
LB-187-10-C-TFSPO						1.5		100×76×247
LB-187-10-C-7					7mm	1.25		93×78.3×244
LB-187-10-C-7SPO						1.5		100×81.8×247
LB-187-10-C-3.5F					3.5F	1.25		93×69×244
LB-187-10-C-3.5FSPO						1.5		100×76×247
LB-187-15-A	3.95-5.85	WR187	Linear	15	FDP48	1.15	Al	168×118×210
LB-187-15-ASPO								175×125×213
LB-187-15-C-NF					NF	1.25		168×118×264
LB-187-15-C-NFSPO								175×125×267
LB-187-15-C-SF					SF			168×118×264
LB-187-15-C-SFSPO								175×125×267
LB-187-15-C-TF					TF			168×118×264
LB-187-15-C-TFSPO								175×125×267
LB-187-15-C-7					7mm			168×118×264
LB-187-15-C-7SPO								175×125×267
LB-187-15-C-3.5F					3.5F			168×118×264
LB-187-15-C-3.5FSPO								175×125×267
LB-187-20-A	3.95-5.85	WR187	Linear	20	FDP48	1.15	Al	273.8×211.8×350
LB-187-20-ASPO								282×220×355
LB-187-20-C-NF					NF	1.25		273.8×211.8×404
LB-187-20-C-NFSPO								282×220×409
LB-187-20-C-SF					SF			273.8×211.8×404
LB-187-20-C-SFSPO								282×220×409
LB-187-20-C-TF					TF			273.8×211.8×404
LB-187-20-C-TFSPO								282×220×409
LB-187-20-C-7					7mm			273.8×211.8×404
LB-187-20-C-7SPO								282×220×409
LB-187-20-C-3.5F					3.5F			273.8×211.8×404
LB-187-20-C-3.5FSPO								282×220×409



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-187-25-A	3.95-5.85	WR187	Linear	25	FDP48	1.15	Al	600×560×1696
LB-187-25-ASPO								616×576×1700
LB-187-25-C-NF					1.25	Al		600×560×1750
LB-187-25-C-NFSPO								616×576×1754
LB-187-25-C-SF								600×560×1750
LB-187-25-C-SFSPO								616×576×1754
LB-187-25-C-TF								600×560×1750
LB-187-25-C-TFSPO								616×576×1754
LB-187-25-C-7								600×560×1750
LB-187-25-C-7SPO								616×576×1754
LB-187-25-C-3.5F								600×560×1750
LB-187-25-C-3.5FSPO								616×576×1754
LB-159-10-A	4.9-7.05	WR159	Linear	10	FDP58	1.15	Al	81×61.9×125
LB-159-10-ASPO					1.25	81×61.9×128		
LB-159-10-C-NF					1.25	81×65×175		
LB-159-10-C-NFSPO					1.5	81×65×178		
LB-159-10-C-SF					1.25	81×61.9×175		
LB-159-10-C-SFSPO					1.5	81×61.9×178		
LB-159-10-C-TF					1.25	81×64.9×175		
LB-159-10-C-TFSPO					1.5	81×64.9×178		
LB-159-10-C-7					1.25	81×73.8×175		
LB-159-10-C-7SPO					1.5	81×73.8×178		
LB-159-10-C-3.5F					1.25	81×61.9×175		
LB-159-10-C-3.5FSPO					1.5	81×61.9×178		
LB-159-15-A	4.9-7.05	WR159	Linear	15	FDP58	1.15	Al	138.1×102.9×180
LB-159-15-ASPO								145×110×183
LB-159-15-C-NF					1.25	Al		138.1×102.9×230
LB-159-15-C-NFSPO								145×110×233
LB-159-15-C-SF								138.1×102.9×230
LB-159-15-C-SFSPO								145×110×233
LB-159-15-C-TF								138.1×102.9×230
LB-159-15-C-TFSPO								145×110×233
LB-159-15-C-7								138.1×102.9×230
LB-159-15-C-7SPO								145×110×233
LB-159-15-C-3.5F								138.1×102.9×230
LB-159-15-C-3.5FSPO								145×110×233



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)	
LB-159-20-A	4.9-7.05	WR159	Linear	20	FDP58	1.1	Al	225×173×265	
LB-159-20-ASPO					1.25	232×180×268			
LB-159-20-C-NF						225×173×315			
LB-159-20-C-NFSPO						232×180×318			
LB-159-20-C-SF						225×173×315			
LB-159-20-C-SFSPO						232×180×318			
LB-159-20-C-TF						225×173×315			
LB-159-20-C-TFSPO						232×180×318			
LB-159-20-C-7						225×173×315			
LB-159-20-C-7SPO						232×180×318			
LB-159-20-C-3.5F						225×173×315			
LB-159-20-C-3.5FSPO					232×180×318				
LB-137-10-A	5.85-8.2	WR137	Linear	10	FDP70	1.15	Al	68.3×49.2×110	
LB-137-10-ASPO						1.25		68.3×54×112.5	
LB-137-10-C-NF					NF	1.25		68.3×56.5×158	
LB-137-10-C-NFSPO						1.5		68.3×58.9×160.5	
LB-137-10-C-SF					SF	1.25		68.3×49.2×158	
LB-137-10-C-SFSPO						1.5		68.3×54×160.5	
LB-137-10-C-TF					TF	1.25		68.3×56.4×158	
LB-137-10-C-TFSPO						1.5		68.3×58.8×160.5	
LB-137-10-C-7					7mm	1.25		68.3×65.1×158	
LB-137-10-C-7SPO						1.5		68.3×67.6×160.5	
LB-137-10-C-3.5F					3.5F	1.25		68.3×49.2×158	
LB-137-10-C-3.5FSPO						1.5		68.3×54×160.5	
LB-137-15-A	5.85-8.2	WR137	Linear	15	FDP70	1.15	Al	143.2×113.2×170	
LB-137-15-ASPO						1.25		150×120×173	
LB-137-15-C-NF					NF			143.2×113.2×218	
LB-137-15-C-NFSPO								150×120×221	
LB-137-15-C-SF					SF			143.2×113.2×218	
LB-137-15-C-SFSPO								150×120×221	
LB-137-15-C-TF					TF			143.2×113.2×218	
LB-137-15-C-TFSPO								150×120×221	
LB-137-15-C-7					7mm			143.2×113.2×218	
LB-137-15-C-7SPO								150×120×221	
LB-137-15-C-3.5F					3.5F			143.2×113.2×218	
LB-137-15-C-3.5FSPO								150×120×221	



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-137-20-A	5.85-8.2	WR137	Linear	20	FDP70	1.1	Al	197×153×290
LB-137-20-ASPO								206×162×294
LB-137-20-C-NF					1.25	197×153×338		
LB-137-20-C-NFSPO								206×162×342
LB-137-20-C-SF								197×153×338
LB-137-20-C-SFSPO								206×162×342
LB-137-20-C-TF								197×153×338
LB-137-20-C-TFSPO								206×162×342
LB-137-20-C-7								197×153×338
LB-137-20-C-7SPO								206×162×342
LB-137-20-C-3.5F								197×153×338
LB-137-20-C-3.5FSPO								206×162×342
LB-137-25-A	5.85-8.2	WR137	Linear	25	FDP70	1.15	Al	446×416×1400
LB-137-25-ASPO								462×432×1404
LB-137-25-C-NF					1.25	446×416×1448		
LB-137-25-C-NFSPO								462×432×1452
LB-137-25-C-SF								446×416×1448
LB-137-25-C-SFSPO								462×432×1452
LB-137-25-C-TF								446×416×1448
LB-137-25-C-TFSPO								462×432×1452
LB-137-25-C-7								446×416×1448
LB-137-25-C-7SPO								462×432×1452
LB-137-25-C-3.5F								446×416×1448
LB-137-25-C-3.5FSPO								462×432×1452
LB-112-10-A	7.05-10.0	WR112	Linear	10	FBP84	1.15	Al	52×47.8×90
LB-112-10-ASPO						1.25		58×47.8×92.5
LB-112-10-C-NF					1.25	52×54.2×130		
LB-112-10-C-NFSPO								58×54.2×132.5
LB-112-10-C-SF					1.25	52×47.8×130		
LB-112-10-C-SFSPO								58×47.8×132.5
LB-112-10-C-TF					1.25	52×54×130		
LB-112-10-C-TFSPO								58×54×132.5
LB-112-10-C-7					1.25	52×62.9×130		
LB-112-10-C-7SPO								58×62.9×132.5
LB-112-10-C-3.5F					1.25	52×47.8×130		
LB-112-10-C-3.5FSPO								58×47.8×132.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-112-15-A	7.05-10.0	WR112	Linear	15	FBP84	1.15	Al	102×71×140
LB-112-15-ASPO								109×78×143
LB-112-15-C-NF					NF	1.25		102×71×180
LB-112-15-C-NFSPO								109×78×183
LB-112-15-C-SF								102×71×180
LB-112-15-C-SFSPO								109×78×183
LB-112-15-C-TF								102×71×180
LB-112-15-C-TFSPO								109×78×183
LB-112-15-C-7								102×74.5×180
LB-112-15-C-7SPO								109×78×183
LB-112-15-C-3.5F								102×71×180
LB-112-15-C-3.5FSPO								109×78×183
LB-112-20-A	7.05-10.0	WR112	Linear	20	FBP84	1.15	Al	172×128×230
LB-112-20-ASPO								179×135×233
LB-112-20-C-NF					NF	1.25		172×128×270
LB-112-20-C-NFSPO								179×135×273
LB-112-20-C-SF								172×128×270
LB-112-20-C-SFSPO								179×135×273
LB-112-20-C-TF								172×128×270
LB-112-20-C-TFSPO								179×135×273
LB-112-20-C-7								172×128×270
LB-112-20-C-7SPO								179×135×273
LB-112-20-C-3.5F								172×128×270
LB-112-20-C-3.5FSPO								179×135×273
LB-90-10-A	8.2-12.4	WR90	Linear	10	FBP100	1.15	Al	42×41.4×75
LB-90-10-ASPO						1.25		48×43×77.5
LB-90-10-C-SF					SF	1.25		42×41.4×113
LB-90-10-C-SFSPO						1.5		48×43×115.5
LB-90-10-C-ESF					Endlaunch SF	1.25		42×41.4×122.4
LB-90-10-C-ESFSPO						1.5		48×43×124.9
LB-90-10-C-NF					NF	1.25		42×49.6×113
LB-90-10-C-NFSPO						1.5		48×50.6×115.5
LB-90-10-C-TF					TF	1.25		42×49.5×113
LB-90-10-C-TFSPO						1.5		48×51.1×115.5
LB-90-10-C-7					7mm	1.25		42×58.5×113
LB-90-10-C-7SPO						1.5		48×60.1×115.5
LB-90-10-C-3.5F					3.5F	1.25		42×41.4×113
LB-90-10-C-3.5FSPO						1.5		48×43×115.5



pradeep@rfconnector.in

9810138894

www.synergytpl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-90-15-A	8.2-12.4	WR90	Linear	15	FBP100	1.15	Al	84×60×105
LB-90-15-ASPO								90×66×107.5
LB-90-15-C-SF					SF	1.25		84×60×143
LB-90-15-C-SFSPO								90×66×145.5
LB-90-15-C-NF					NF			84×60×143
LB-90-15-C-NFSPO								90×66×145.5
LB-90-15-C-TF					TF			84×60×143
LB-90-15-C-TFSPO								90×66×145.5
LB-90-15-C-7					7mm			84×67.8×143
LB-90-15-C-7SPO								90×70.8×145.5
LB-90-15-C-3.5F					3.5F			84×60×143
LB-90-15-C-3.5FSPO								90×66×145.5
LB-90-20-A	8.2-12.4	WR90	Linear	20	FBP100	1.1	Al	138×107×200
LB-90-20-ASPO								144×113×203
LB-90-20-C-SF					SF	1.25		138×107×238
LB-90-20-C-SFSPO								144×113×241
LB-90-20-C-NF					NF			138×107×238
LB-90-20-C-NFSPO								144×113×241
LB-90-20-C-TF					TF			138×107×238
LB-90-20-C-TFSPO								144×113×241
LB-90-20-C-7					7mm			138×107×238
LB-90-20-C-7SPO								144×113×241
LB-90-20-C-3.5F					3.5F			138×107×238
LB-90-20-C-3.5FSPO								144×113×241
LB-90-25-A2	8.2-12.4	WR90	Linear	25	FBP100	1.1	Al	244×204×640
LB-90-25-A2SPO								255×215×646
LB-90-25-C2-SF					SF	1.25		244×204×678
LB-90-25-C2-SFSPO								255×215×684
LB-90-25-C2-NF					NF			244×204×678
LB-90-25-C2-NFSPO								255×215×684
LB-90-25-C2-TF					TF			244×204×678
LB-90-25-C2-TFSPO								255×215×684
LB-90-25-C2-7					7mm			244×204×678
LB-90-25-C2-7SPO								255×215×684
LB-90-25-C2-3.5F					3.5F			244×204×678
LB-90-25-C2-3.5FSPO								255×215×684
LB-102-10-A	7.0-11.0	WR102	Linear	10	WR102	1.15	Al	87 x 67 x 135
LB-102-10-C-SF					SF	1.25		46 x 51.9 x 123
LB-102-10-C-NF					NF			46 x 51.9 x 123
LB-102-15-A	7.0-11.0	WR102	Linear	15	WR102	1.15	Al	87 x 67 x 135
LB-102-15-C-SF					SF	1.25		87 x 67 x 173
LB-102-15-C-NF					NF			87 x 67 x 173
LB-102-20-A	7.0-11.0	WR102	Linear	20	WR102	1.15	Al	168 x 123 x 225
LB-102-20-C-SF					SF	1.25		168 x 123 x 263
LB-102-20-C-NF					NF			168 x 123 x 263



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)	
LB-102-25-A	7.0-11.0	WR102	Linear	25	WR102	1.15	Al	275 x 230 x 700	
LB-102-25-C-SF					SF	1.25		275 x 230 x 738	
LB-102-25-C-NF					NF			275 x 230 x 738	
LB-75-10-A	10.0-15.0	WR75	Linear	10	FBP120	1.15	Al	38×38×65	
LB-75-10-ASPO						1.25		44×38×67	
LB-75-10-C-SF					SF	1.25		38×38.2×95	
LB-75-10-C-SFSPO						1.5		44×38.2×97	
LB-75-10-C-NF					NF	1.25		38×47.8×95	
LB-75-10-C-NFSPO						1.5		44×47.8×97	
LB-75-10-C-TF					TF	1.25		38×47.6×95	
LB-75-10-C-TFSPO						1.5		44×47.6×97	
LB-75-10-C-7					7mm	1.25		38×56.5×95	
LB-75-10-C-7SPO						1.5		44×56.5×97	
LB-75-10-C-3.5F					3.5F	1.25		38×38.2×95	
LB-75-10-C-3.5FSPO						1.5		44×38.2×97	
LB-75-15-A	10.0-15.0	WR75	Linear	15	FBP120	1.15	Al	68×48×90	
LB-75-15-ASPO						1.25		74×54×92.5	
LB-75-15-C-SF					SF			68×48×120	
LB-75-15-C-SFSPO								74×54×120.5	
LB-75-15-C-NF					NF			68×52.8×120	
LB-75-15-C-NFSPO								74×55.8×120.5	
LB-75-15-C-TF					TF			68×52.6×120	
LB-75-15-C-TFSPO								74×55.6×120.5	
LB-75-15-C-7					7mm			68×61.5×120	
LB-75-15-C-7SPO								74×64.5×120.5	
LB-75-15-C-3.5F					3.5F			68×48×120	
LB-75-15-C-3.5FSPO								74×54×120.5	
LB-75-20-A	10.0-15.0	WR75	Linear	20	FBP120	1.1	Al	103×83×155	
LB-75-20-ASPO						1.25		116×91×158	
LB-75-20-C-SF					SF			103×83×185	
LB-75-20-C-SFSPO								116×91×188	
LB-75-20-C-NF					NF			103×83×185	
LB-75-20-C-NFSPO								116×91×188	
LB-75-20-C-TF					TF			103×83×185	
LB-75-20-C-TFSPO								116×91×188	
LB-75-20-C-7					7mm			103×83×185	
LB-75-20-C-7SPO								116×91×188	
LB-75-20-C-3.5F					3.5F			103×83×185	
LB-75-20-C-3.5FSPO								116×91×188	



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-75-25-A	10.0-15.0	WR75	Linear	25	FBP120	1.1	Al	185×155×400
LB-75-25-ASPO								194×164×403
LB-75-25-C-SF					SF	1.25		185×155×430
LB-75-25-C-SFSPO								194×164×433
LB-75-25-C-NF					NF			185×155×430
LB-75-25-C-NFSPO								194×164×433
LB-75-25-C-TF					TF			185×155×430
LB-75-25-C-TFSPO								194×164×433
LB-75-25-C-7					7mm			185×155×430
LB-75-25-C-7SPO								194×164×433
LB-75-25-C-3.5F					3.5F			185×155×430
LB-75-25-C-3.5FSPO								194×164×433
LB-62-10-A	12.4-18.0	WR62	Linear	10	FBP140	1.15	Al	33.3×33.3×60
LB-62-10-ASPO						1.5		37×33.3×62
LB-62-10-C-SF					SF	1.25		33.3×34.9×87
LB-62-10-C-SFSPO						1.5		37×34.9×89
LB-62-10-C-NF					NF	1.25		33.3×44.6×87
LB-62-10-C-NFSPO						1.5		37×44.6×89
LB-62-10-C-TF					TF	1.25		33.3×44.4×87
LB-62-10-C-TFSPO						1.5		37×44.4×89
LB-62-10-C-7					7mm	1.25		33.3×53.3×87
LB-62-10-C-7SPO						1.5		37×53.3×89
LB-62-10-C-3.5F					3.5F	1.25		33.3×35.1×87
LB-62-10-C-3.5FSPO						1.5		37×35.1×89
LB-62-15-A	12.4-18.0	WR62	Linear	15	FBP140	1.15	Al	50×35×60
LB-62-15-ASPO								58×43×62.5
LB-62-15-C-SF					SF	1.25		50×35.7×87
LB-62-15-C-SFSPO								58×43×89.5
LB-62-15-C-NF					NF			50×45.4×87
LB-62-15-C-NFSPO								58×49.4×89.5
LB-62-15-C-TF					TF			50×45.2×87
LB-62-15-C-TFSPO								58×49.2×89.5
LB-62-15-C-7					7mm			50×54.1×87
LB-62-15-C-7SPO								58×58.1×89.5
LB-62-15-C-3.5F					3.5F			50×35.9×87
LB-62-15-C-3.5FSPO								58×39.9×89.5



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-62-20-A	12.4-18.0	WR62	Linear	20	FBP140	1.1	Al	93.2×72.1×135
LB-62-20-ASPO								101×80×138
LB-62-20-C-SF					1.25	Al		93.2×72.1×162
LB-62-20-C-SFSPO								101×80×165
LB-62-20-C-NF								93.2×72.1×162
LB-62-20-C-NFSPO								101×80×165
LB-62-20-C-TF								93.2×72.1×162
LB-62-20-C-TFSPO								101×80×165
LB-62-20-C-7								93.2×72.1×162
LB-62-20-C-7SPO								101×80×165
LB-62-20-C-3.5F								93.2×72.1×162
LB-62-20-C-3.5FSPO								101×80×165
LB-62-25-A2					12.4-18.0	WR62		Linear
LB-62-25-A2SPO			162×140×339					
LB-62-25-C2-SF	1.25	Al	155×140×363					
LB-62-25-C2-SFSPO			162×140×366					
LB-62-25-C2-NF			155×140×363					
LB-62-25-C2-NFSPO			162×140×366					
LB-62-25-C2-TF			155×140×363					
LB-62-25-C2-TFSPO			162×140×366					
LB-62-25-C2-7			155×140×363					
LB-62-25-C2-7SPO			162×140×366					
LB-62-25-C2-3.5F			155×140×363					
LB-62-25-C2-3.5FSPO			162×140×366					
LB-51-10-A	15.0-22.0	WR51	Linear	10			FBP180	
LB-51-10-ASPO					1.25	31.6×30.2×49		
LB-51-10-C-SF					1.25	30.2×32.7×74		
LB-51-10-C-SFSPO					1.5	31.6×32.7×76		
LB-51-10-C-ESF					1.25	30.2×30.2×83.4		
LB-51-10-C-ESFSPO					1.5	31.6×30.2×85.4		
LB-51-15-A	15.0-22.0	WR51	Linear	15	FBP180	1.15	Cu	44×34×60
LB-51-15-ASPO								50×40×62.5
LB-51-15-C-SF					1.25	44×34×87		
LB-51-15-C-SFSPO						50×40×89.5		
LB-51-20-A	15.0-22.0	WR51	Linear	20	FBP180	1.15	Cu	77×60×110
LB-51-20-ASPO								83×66×112.5
LB-51-20-C-SF					1.25	77×60×137		
LB-51-20-C-SFSPO						83×66×139.5		
LB-51-25-A	15.0-22.0	WR51	Linear	25	FBP180	1.15	Cu	130×100×260
LB-51-25-ASPO								137×107×263
LB-51-25-C-SF					1.25	130×100×287		
LB-51-25-C-SFSPO						137×107×290		



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-42-10-A	18.0-26.5	WR42	Linear	10	FBP220	1.15	Cu	22.4×22.4×42
LB-42-10-ASPO						1.25		26.2×22.4×43.5
LB-42-10-C-SF					SF	1.25		22.4×27.8×77
LB-42-10-C-SFSPO						1.5		26.2×27.8×78.5
LB-42-10-C-KF					KF	1.25		22.4×27.8×77
LB-42-10-C-KFSPO						1.5		26.2×27.8×78.5
LB-42-10-C-3.5F					3.5F	1.25		22.4×27.8×77
LB-42-10-C-3.5FSPO						1.5		26.2×27.8×78.5
LB-42-15-A	18.0-26.5	WR42	Linear	15	FBP220	1.15	Cu	34×24.5×48
LB-42-15-ASPO								38.6×29.1×50
LB-42-15-C-SF					SF	1.25		34×28.8×83
LB-42-15-C-SFSPO								38.6×31.1×85
LB-42-15-C-KF					KF			34×28.8×83
LB-42-15-C-KFSPO								38.6×31.1×85
LB-42-15-C-3.5F					3.5F			34×28.8×83
LB-42-15-C-3.5FSPO								38.6×31.1×85
LB-42-20-A	18.0-26.5	WR42	Linear	20	FBP220	1.15	Cu	64.3×50.3×90
LB-42-20-ASPO								71.5×57.4×92.5
LB-42-20-C-SF					SF	1.25		64.3×50.3×125
LB-42-20-C-SFSPO								71.5×57.4×127.5
LB-42-20-C-KF					KF			64.3×50.3×125
LB-42-20-C-KFSPO								71.5×57.4×127.5
LB-42-20-C-3.5F					3.5F			64.3×50.3×125
LB-42-20-C-3.5FSPO								71.5×57.4×127.5
LB-42-25-A2	18.0-26.5	WR42	Linear	25	FBP220	1.15	Al	105×90×271
LB-42-25-A2SPO								111×92×274
LB-42-25-C2-SF					SF	1.25		105×90×306
LB-42-25-C2-SFSPO								111×92×309
LB-42-25-C2-KF					KF			105×90×306
LB-42-25-C2-KFSPO								111×92×309
LB-42-25-C2-3.5F					3.5F			105×90×306
LB-42-25-C2-3.5FSPO								111×92×309
LB-34-10-A	22.0-33.0	WR34	Linear	10	FBP260	1.15	Cu	21.1×21.1×39
LB-34-10-ASPO						1.25		24×21.1×40.5
LB-34-10-C-KF					KF	1.25		21.1×27.1×63
LB-34-10-C-KFSPO						1.5		24×27.1×64.5
LB-34-15-A	22.0-33.0	WR34	Linear	15	FBP260	1.15	Cu	31×22×42
LB-34-15-ASPO								37×28×44
LB-34-15-C-KF					KF	1.25		31×27.6×66
LB-34-15-C-KFSPO								37×30.6×68
LB-34-20-A	22.0-33.0	WR34	Linear	20	FBP260	1.15	Cu	54×42×95
LB-34-20-ASPO								63×51×97.5
LB-34-20-C-KF					KF	1.25		54×42×119
LB-34-20-C-KFSPO								63×51×121.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-34-25-A2	22.0-33.0	WR34	Linear	25	FBP260	1.15	Cu	92×80×220
LB-34-25-A2SPO								101×81×223
LB-34-25-C2-KF					KF	1.25		92×80×244
LB-34-25-C2-KFSPO								101×81×247
LB-28-10-A	26.5-40.0	WR28	Linear	10	FBP320	1.15	Cu	19.1×19.1×31
LB-28-10-ASPO								19.1×19.1×32.5
LB-28-10-C-KF					KF	1.25		19.1×25.7×55
LB-28-10-C-KFSPO								19.1×25.7×56.5
LB-28-10-C-2.4F					2.4F			19.1×26.6×55
LB-28-10-C-2.4FSPO								19.1×26.6×56.5
LB-28-10-64-C-2.4F	22.5-45.0	WR28	Linear	10	2.4F	1.4	Cu	19.1×26.3×53.8
LB-28-10-64-C-2.4FSPO								
LB-28-10-68-C-2.4F	24.0-50.0	WR28	Linear	10	2.4F	1.4	Cu	19.1×26.3×54.6
LB-28-10-68-C-2.4FSPO								
LB-28-10-72-C-2.4F	24.0-54.0	WR28	Linear	10	2.4F	1.25	Cu	19.1×26×55
LB-28-10-72-C-2.4FSPO								19.1×26×56.5
LB-28-10-72-C-1.85F					1.85F			19.1×26.1×56
LB-28-10-72-C-1.85FSPO								19.1×26.1×57.5
LB-28-15-A	26.5-40.0	WR28	Linear	15	FBP320	1.15	Cu	20.2×19.1×36
LB-28-15-ASPO								23.8×20.2×37.5
LB-28-15-C-KF					KF	1.25		20.2×25.7×60
LB-28-15-C-KFSPO								23.8×26.3×61.5
LB-28-15-C-2.4F					2.4F			20.2×26.6×60
LB-28-15-C-2.4FSPO								23.8×27.2×61.5
LB-28-15-64-C-2.4F	22.5-45.0	WR28	Linear	15	2.4F	1.4	Cu	20.2×26.3×58.8
LB-28-15-64-C-2.4FSPO								
LB-28-15-68-C-2.4F	24.0-50.0	WR28	Linear	15	2.4F	1.4	Cu	20.2×26.3×59.6
LB-28-15-68-C-E2.4F					Endlaunch 2.4F			20.2×26.3×59.6
LB-28-15-68-C-2.4FSPO					2.4F			23.8×26.9×61.1
LB-28-15-72-C-2.4F	24.0-50.0	WR28	Linear	15	2.4F	1.25	Cu	20.2×26×60
LB-28-15-72-C-2.4FSPO								23.8×26.6×61.5
LB-28-15-72-C-1.85F					1.85F			20.2×26×61
LB-28-15-72-C-1.85FSPO								23.8×26.6×62.5
LB-28-20-A	26.5-40.0	WR28	Linear	20	FBP320	1.15	Cu	40.4×31.9×70
LB-28-20-ASPO								48.5×40×72.5
LB-28-20-C-KF					KF	1.25		40.4×32.1×94
LB-28-20-C-KFSPO								48.5×40×96.5
LB-28-20-C-2.4F					2.4F			40.4×33×94
LB-28-20-C-2.4FSPO								48.5×40×96.5
LB-28-20-C-E2.4F					Endlaunch 2.4F			40.4×31.9×105.7
LB-28-20-C-E2.4FSPO								48.5×40×108.2

 www.synergytpl.com



pradeep@rfconnector.in

9810138894

www.synergytpl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-19-10-A	40.0-60.0	WR19	Linear	10	FUGP500	1.15	Cu	28.6×28.6×25
LB-19-10-ASPO						1.25		28.6×28.6×26.5
LB-19-10-C-2.4F	40.0-50.0				2.4F	1.25		28.6×30.8×51
LB-19-10-C-2.4FSPO						1.3		28.6×30.8×51
LB-19-10-C-E2.4F					Endlaunch 2.4F	1.25		28.6 x 28.6 x 48.1
LB-19-10-C-1.85F	40.0-60.0				1.85F	1.25		28.6×31.3×51
LB-19-10-C-1.85FSPO						1.3		28.6×31.3×52.5
LB-19-15-A	40.0-60.0	WR19	Linear	15	FUGP500	1.15	Cu	28.6×28.6×25
LB-19-15-ASPO						1.2		28.6×28.6×26.5
LB-19-15-C-2.4F	40.0-50.0				2.4F	1.25		28.6×30.8×51
LB-19-15-C-2.4FSPO						1.3		28.6×30.8×52.5
LB-19-15-C-E2.4F					Endlaunch 2.4F	1.25		28.6 x 28.6 x 48.1
LB-19-15-C-1.85F	40.0-60.0				1.85F	1.25		28.6×31.3×51
LB-19-15-C-1.85FSPO						1.3		28.6×31.3×52.5
LB-19-20-A	40.0-60.0	WR19	Linear	20	FUGP500	1.1	Cu	30×28.6×50
LB-19-20-ASPO						1.15		36.1×30×52
LB-19-20-C-2.4F	40.0-50.0				2.4F	1.25		30×31.9×76
LB-19-20-C-2.4FSPO						1.3		36.1×32.6×78
LB-19-20-C-E2.4F					Endlaunch 2.4F	1.25		28.6 x 28.6 x 73.1
LB-19-20-C-1.85F	40.0-60.0				1.85F	1.25		30×31.3×76
LB-19-20-C-1.85FSPO						1.3		36.1×32×78
LB-19-25-A	40.0-60.0	WR19	Linear	25	FUGP500	1.15	Cu	49×41×130
LB-19-25-ASPO						1.2		55×47×132.5
LB-19-25-C-2.4F	40.0-50.0				2.4F	1.25		49×41×156
LB-19-25-C-2.4FSPO						1.3		55×47×158.5
LB-19-25-C2-E2.4F					Endlaunch 2.4F	1.25		28.6 x 28.6 x 153.1
LB-19-25-C-1.85F	40.0-60.0				1.85F	1.25		49×41×156
LB-19-25-C-1.85FSPO						1.3		55×47×158.5
LB-15-10-A	50.0-75.0	WR15	Linear	10	FUGP620	1.2	Cu	19.1×19.1×40
LB-15-10-ASPO						1.4		19.1×19.1×41.5
LB-15-10-C-1.85F	50.0-65.0				1.85F	2		19.1×26.7×68
LB-15-10-C-1.85FSPO						2		19.1×26.7×69.5
LB-15-10-C-1.0F	50.0-75.0				1.0F	2		19.1×25×65.4
LB-15-10-C-1.0FSPO						2		19.1×25×66.9
LB-15-15-A	50.0-75.0	WR15	Linear	15	FUGP620	1.15	Cu	19.1×19.1×40
LB-15-15-ASPO						1.3		19.1×19.1×41.5
LB-15-15-C-1.85F	50.0-65.0				1.85F	2		19.1×26.7×68
LB-15-15-C-1.85FSPO						2		19.1×26.7×69.5
LB-15-15-C-1.0F	50.0-75.0				1.0F	2		19.1×25×65.4
LB-15-15-C-1.0FSPO						2		19.1×25×66.9
LB-15-20-A	50.0-75.0	WR15	Linear	20	FUGP620	1.1	Cu	21.6×19.1×47.3
LB-15-20-ASPO						1.2		27×22×49.3
LB-15-20-C-1.85F	50.0-65.0				1.85F	1.5		21.6×26.7×75.3



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

[9810138894](tel:9810138894)

www.synergytpl.com

Standard Gain Horn Antenna

LB-15-20-C-1.85FSPO					2	27×27.8×77.3
LB-15-20-C-1.0F	50.0-75.0				1.5	21.6×25×72.7
LB-15-20-C-1.0FSPO					2	27×26.4×74.7



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-15-25-A	50.0-75.0	WR15	Linear	25	FUGP620	1.1	Cu	36.8×29.8×91.4
LB-15-25-ASPO						1.2		43×36×93.9
LB-15-25-C-1.85F	50.0-65.0				1.85F	2		36.8×32×119.4
LB-15-25-C-1.85FSPO						2		43×36×121.9
LB-15-25-C-1.0F	50.0-75.0				1.0F	2		36.8×30.3×116.8
LB-15-25-C-1.0FSPO						2		43×36×119.3
LB-12-10-A	60.0-90.0	WR12	Linear	10	FUGP740	1.2	Cu	19.1×19.1×20
LB-12-10-ASPO						1.4		19.1×19.1×21.5
LB-12-10-C-1.0F					1.0F	1.4		19.1×25×45.4
LB-12-10-C-1.0FSPO						2.2		19.1×25×46.9
LB-12-15-A	60.0-90.0	WR12	Linear	15	FUGP740	1.15	Cu	19.1×19.1×25
LB-12-15-ASPO						1.3		19.1×19.1×26.5
LB-12-15-C-1.0F					1.0F	1.4		19.1×25×50.4
LB-12-15-C-1.0FSPO						2.2		19.1×25×51.9
LB-12-20-A	60.0-90.0	WR12	Linear	20	FUGP740	1.1	Cu	19.1×19.1×31.4
LB-12-20-ASPO						1.25		24×20×33.4
LB-12-20-C-1.0F					1.0F	1.3		19.1×25×56.8
LB-12-20-C-1.0FSPO						2		24×25.4×58.8
LB-12-20-C-E1.0F					Endlaunch 1.0F	1.3		19.1×19.1×51.1
LB-12-25-A	60.0-90.0	WR12	Linear	25	FUGP740	1.1	Cu	30.8×24.8×82
LB-12-25-ASPO						1.25		36×30×84
LB-12-25-C-1.0F					1.0F	1.3		30.8×27.8×107.4
LB-12-25-C-1.0FSPO						2		36×30.4×109.4
LB-12-25-C-E1.0F					Endlaunch 1.0F	1.3		-
LB-10-10-A	75.0-110.0	WR10	Linear	10	FUGP900	1.15	Cu	19.1×19.1×20
LB-10-10-ASPO						1.3		19.1×19.1×21
LB-10-10-C-1.0F					1.0F	1.5		19.1×25×45.4
LB-10-10-C-1.0FSPO						2		19.1×25×46.4
LB-10-15-A	75.0-110.0	WR10	Linear	15	FUGP900	1.1	Cu	19.1×19.1×25
LB-10-15-ASPO						1.3		19.1×19.1×26.5
LB-10-15-C-1.0F					1.0F	1.5		19.1×25×50.4
LB-10-15-C-1.0FSPO						2		19.1×25×51.9
LB-10-20-A	75.0-110.0	WR10	Linear	20	FUGP900	1.1	Cu	19.1×19.1×31.4
LB-10-20-ASPO						1.25		19.1×19.1×32.9
LB-10-20-C-1.0F					1.0F	1.5		19.1×25×56.8
LB-10-20-C-1.0FSPO						2		19.1×25×58.3
LB-10-25-A	75.0-110.0	WR10	Linear	25	FUGP900	1.1	Cu	26.8×20.8×70
LB-10-25-ASPO						1.25		32×26×72
LB-10-25-C-1.0F					1.0F	1.5		26.8×25.9×95.4
LB-10-25-C-1.0FSPO						2		32×28.5×97.4
LB-8-10-A	90.0-140.0	WR8	Linear	10	UG387/U-M	1.15	Cu	-
LB-8-10-ASPO						1.35		-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Standard Gain Horn Antenna

Model	Freq.(GHz)	Waveguide	Pol.	Gain Typ.	Output	VSWR Typ.	Mat.	Size (mm)
LB-8-15-A	90.0-140.0	WR8	Linear	15	UG387/U-M	1.10	Cu	19.1×19.1×20.4
LB-8-15-ASPO						1.30		-
LB-8-20-A	90.0-140.0	WR8	Linear	20	UG387/U-M	1.10	Cu	19.1×19.1×25.2
LB-8-20-ASPO						1.25		-
LB-8-25-A	90.0-140.0	WR8	Linear	25	UG387/U-M	1.1	Cu	21.4×19.1×51
LB-8-25-ASPO						1.25		26×21×52.5
LB-6-10-A	110.0-170.0	WR6	Linear	10	UG387/U-M	1.2	Cu	19.1×19.1×10.3
LB-6-10-ASPO						1.35		19.1×19.1×11.3
LB-6-15-A	110.0-170.0	WR6	Linear	15	UG387/U-M	1.15	Cu	19.1×19.1×12.5
LB-6-15-ASPO						1.30		19.1×19.1×14
LB-6-20-A	110.0-170.0	WR6	Linear	20	UG387/U-M	1.15	Cu	19.1×19.1×16.2
LB-6-20-ASPO						1.25		19.1×19.1×17.7
LB-6-25-A	110.0-170.0	WR6	Linear	25	UG387/U-M	1.15	Cu	19.1×19.1×41
LB-6-25-ASPO						1.25		22×19.1×42.5
LB-5-10-A	140.0-220.0	WR5	Linear	10	UG387/U-M	1.25	Cu	-
LB-5-10-ASPO						1.45		-
LB-5-15-A	140.0-220.0	WR5	Linear	15	UG387/U-M	1.2	Cu	19.1×19.1×10.2
LB-5-15-ASPO						1.4		-
LB-5-20-A	140.0-220.0	WR5	Linear	20	UG387/U-M	1.2	Cu	19.1×19.1×14
LB-5-20-ASPO						1.35		-
LB-5-25-A	140.0-220.0	WR5	Linear	25	UG387/U-M	1.2	Cu	19.1×19.1×32.2
LB-5-25-ASPO						1.35		19.1×19.1×33.7
LB-4-25-A	170.0-260.0	WR4	Linear	25	APF4	1.15	Cu	19.1×19.1×29.5
LB-4-10-A	170.0-260.0	WR4	Linear	10	APF4	1.15	Cu	19.1×19.1×7.2
LB-3-15-A	220.0-325.0	WR3	Linear	15	APF3	1.15	Cu	19.1×19.1×6.9
LB-3-20-A	220.0-325.0	WR3	Linear	20	APF3	1.15	Cu	19.1×19.1×10
LB-3-25-A	220.0-325.0	WR3	Linear	25	APF3	1.15	Cu	19.1×19.1×25.2
LB-2.8-25-A	260.0-400.0	WR2.8	Linear	25	APF2.8	1.15	Cu	19.1×19.1×20.7
LB-2.2-25-A	325.0-500.0	WR2.2	Linear	25	APF2.2	1.15	Cu	19.1×19.1×18.4
LB-1.5-25-A	500.0-750.0	WR1.5	Linear	25	APF1.5	1.15	Cu	-



pradeep@rfconnector.in



9810138894

www.synergytpl.com



Diagonal Horn Antenna

Diagonal Horn Antenna

A Type, WG Output:

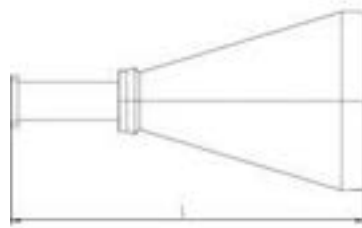

C Type, Coaxial Output:

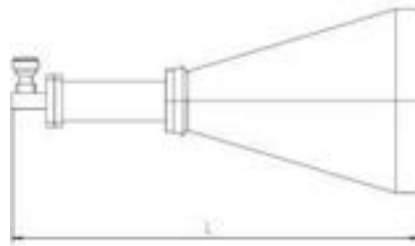

The LB-DG series diagonal horn antennas are linearly polarized and provide a symmetrical radiation pattern and extremely low side-lobes. A-INFO's diagonal horn antenna can cover from 750MHz to 220GHz frequency range. These horns are ideally suited for illumination of anechoic chamber, antenna far field test, radar cross section (RCS) measurement and other applications.

Model Information

Example Part Number: LB-DG -90 -10 -C -SF

Product Code

Waveguide Size: WR975 to WR5

Gain in dB, Standard gain is 15dB, 20dB, 25dB

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male;

2.4F=2.4mm-Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male;

1.0F=1.0mm-Female; 1.0M=1.0mm-Male



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Calibration Option

Diagonal Horn Antenna

Far Field Calibration Data with Extra Fee

Horn Antenna Accessories

1. Mounting Bracket
2. Tripod
3. Radome
4. Carrying Case

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-975-15-A	0.75-1.12	WR975	Linear	15	FDP9(UDR9)	Al	-
LB-DG-975-15-C-NF					NF		-
LB-DG-975-15-C-SF					SF		-
LB-DG-975-15-C-7/16F					7/16F		-
LB-DG-770-15-A	0.96-1.45	WR770	Linear	15	FDP12(UDR12)	Al	840.6×840.6×1148
LB-DG-770-15-C-NF					NF		840.6×840.6×1314
LB-DG-770-15-C-SF					SF		840.6×840.6×1314
LB-DG-770-15-C-7/16F					7/16F		840.6×840.6×1314
LB-DG-650-15-A	1.12-1.7	WR650	Linear	15	FDP14(UDR14)	Al	-
LB-DG-650-15-C-NF					NF		-
LB-DG-650-15-C-SF					SF		-
LB-DG-650-15-C-7/16F					7/16F		-
LB-DG-510-15-A	1.45-2.2	WR510	Linear	15	FDP18(UDR18)	Al	557.8×557.8×821
LB-DG-510-15-C-NF					NF		557.8×557.8×932
LB-DG-510-15-C-SF					SF		557.8×557.8×932
LB-DG-510-15-C-7/16F					7/16F		557.8×557.8×932
LB-DG-430-15-A	1.7-2.6	WR430	Linear	15	FDP22(UDR22)	Al	-
LB-DG-430-15-C-NF					NF		-
LB-DG-430-15-C-SF					SF		-
LB-DG-430-15-C-7/16F					7/16F		-
LB-DG-430-20-A	1.7-2.6	WR430	Linear	20	FDP22(UDR22)	Al	-
LB-DG-430-20-C-NF					NF		-
LB-DG-430-20-C-SF					SF		-
LB-DG-430-20-C-7/16F					7/16F		-
LB-DG-340-15-A	2.2-3.3	WR340	Linear	15	FDP26(UDR26)	Al	407.3×407.3×609.4
LB-DG-340-15-C-NF					NF		407.3×407.3×701.4
LB-DG-340-15-C-SF					SF		407.3×407.3×701.4
LB-DG-340-15-C-7/16F					7/16F		407.3×407.3×701.4



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Diagonal Horn Antenna

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-340-20-A	2.2-3.3	WR340	Linear	20	FDP26(UDR26)	Al	642.7×642.7×1044.4
LB-DG-340-20-C-NF					NF		642.7×642.7×1136.4
LB-DG-340-20-C-SF					SF		642.7×642.7×1136.4
LB-DG-340-20-C-7/16F					7/16F		642.7×642.7×1136.4
LB-DG-284-15-A	2.6-3.95	WR284	Linear	15	FDP32(UDR32)	Al	-
LB-DG-284-15-C-NF					NF		-
LB-DG-284-15-C-SF					SF		-
LB-DG-284-15-C-7/16F					7/16F		-
LB-DG-284-20-A	2.6-3.95	WR284	Linear	20	FDP32(UDR32)	Al	-
LB-DG-284-20-C-NF					NF		-
LB-DG-284-20-C-SF					SF		-
LB-DG-284-20-C-7/16F					7/16F		-
LB-DG-229-15-A	3.3-4.9	WR229	Linear	15	FDP40(UDR40)	Al	270×270×458.6
LB-DG-229-15-C-NF					NF		270×270×523.6
LB-DG-229-15-C-SF					SF		270×270×523.6
LB-DG-229-15-C-TF					TF		270×270×523.6
LB-DG-229-15-C-7					7mm		270×270×523.6
LB-DG-229-15-C-3.5F					3.5F		270×270×523.6
LB-DG-229-20-A	3.3-4.9	WR229	Linear	20	FDP40(UDR40)	Al	447.3×447.3×758.6
LB-DG-229-20-C-NF					NF		447.3×447.3×823.6
LB-DG-229-20-C-SF					SF		447.3×447.3×823.6
LB-DG-229-20-C-TF					TF		447.3×447.3×823.6
LB-DG-229-20-C-7					7mm		447.3×447.3×823.6
LB-DG-229-20-C-3.5F					3.5F		447.3×447.3×823.6
LB-DG-187-15-A	3.95-5.85	WR187	Linear	15	FDP48(UDR48)	Al	-
LB-DG-187-15-C-NF					NF		-
LB-DG-187-15-C-SF					SF		-
LB-DG-187-15-C-TF					TF		-
LB-DG-187-15-C-7					7mm		-
LB-DG-187-15-C-3.5F					3.5F		-
LB-DG-187-20-A	3.95-5.85	WR187	Linear	20	FDP48(UDR48)	Al	-
LB-DG-187-20-C-NF					NF		-
LB-DG-187-20-C-SF					SF		-
LB-DG-187-20-C-TF					TF		-
LB-DG-187-20-C-7					7mm		-
LB-DG-187-20-C-3.5F					3.5F		-

 www.synergytpl.com

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-187-25-A	3.95-5.85	WR187	Linear	25	FDP48(UDR48)	AI	-
LB-DG-187-25-C-NF					NF		-
LB-DG-187-25-C-SF					SF		-
LB-DG-187-25-C-TF					TF		-
LB-DG-187-25-C-7					7mm		-
LB-DG-187-25-C-3.5F					3.5F		-
LB-DG-159-15-A	4.9-7.05	WR159	Linear	15	FDP58(UDR58)	AI	184×184×307.4
LB-DG-159-15-C-NF					NF		184×184×357.4
LB-DG-159-15-C-SF					SF		184×184×357.4
LB-DG-159-15-C-TF					TF		184×184×357.4
LB-DG-159-15-C-7					7mm		184×184×357.4
LB-DG-159-15-C-3.5F					3.5F		184×184×357.4
LB-DG-159-20-A	4.9-7.05	WR159	Linear	20	FDP58(UDR58)	AI	304.4×304.4×507.4
LB-DG-159-20-C-NF					NF		304.4×304.4×557.4
LB-DG-159-20-C-SF					SF		304.4×304.4×557.4
LB-DG-159-20-C-TF					TF		304.4×304.4×557.4
LB-DG-159-20-C-7					7mm		304.4×304.4×557.4
LB-DG-159-20-C-3.5F					3.5F		304.4×304.4×557.4
LB-DG-137-15-A	5.85-8.2	WR137	Linear	15	FDP70(UDR70)	AI	160×160×292.4
LB-DG-137-15-C-NF					NF		160×160×340.4
LB-DG-137-15-C-SF					SF		160×160×340.4
LB-DG-137-15-C-TF					TF		160×160×340.4
LB-DG-137-15-C-7					7mm		160×160×340.4
LB-DG-137-15-C-3.5F					3.5F		160×160×340.4
LB-DG-137-20-A	5.85-8.2	WR137	Linear	20	FDP70(UDR70)	AI	-
LB-DG-137-20-C-NF					NF		-
LB-DG-137-20-C-SF					SF		-
LB-DG-137-20-C-TF					TF		-
LB-DG-137-20-C-7					7mm		-
LB-DG-137-20-C-3.5F					3.5F		-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Diagonal Horn Antenna

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-137-25-A	5.85-8.2	WR137	Linear	25	FDP70(UDR70)	Al	-
LB-DG-137-25-C-NF					NF		-
LB-DG-137-25-C-SF					SF		-
LB-DG-137-25-C-TF					TF		-
LB-DG-137-25-C-7					7mm		-
LB-DG-137-25-C-3.5F					3.5F		-
LB-DG-112-20-A	7.05-10	WR112	Linear	20	FBP84(UBR84)	Al	224.9×224.9×397
LB-DG-112-20-C-NF					NF		224.9×224.9×437
LB-DG-112-20-C-SF					SF		224.9×224.9×437
LB-DG-112-20-C-TF					TF		224.9×224.9×437
LB-DG-112-20-C-7					7mm		224.9×224.9×437
LB-DG-112-20-C-3.5F					3.5F		224.9×224.9×437
LB-DG-90-20-A	8.2-12.4	WR90	Linear	20	FBP100(UBR100)	Al	182.6×182.6×316
LB-DG-90-20-C-SF					SF		182.6×182.6×354
LB-DG-90-20-C-NF					NF		182.6×182.6×354
LB-DG-90-20-C-TF					TF		182.6×182.6×354
LB-DG-90-20-C-7					7mm		182.6×182.6×354
LB-DG-90-20-C-3.5F					3.5F		182.6×182.6×354
LB-DG-90-25-A	8.2-12.4	WR90	Linear	25	FBP100(UBR100)	Al	316.8×316.8×728
LB-DG-90-25-C-SF					SF		316.8×316.8×766
LB-DG-90-25-C-NF					NF		316.8×316.8×766
LB-DG-90-25-C-TF					TF		316.8×316.8×766
LB-DG-90-25-C-7					7mm		316.8×316.8×766
LB-DG-90-25-C-3.5F					3.5F		316.8×316.8×766
LB-DG-75-20-A	10.0-15.0	WR75	Linear	20	FBP120(UBR120)	Al	-
LB-DG-75-20-C-SF					SF		-
LB-DG-75-20-C-NF					NF		-
LB-DG-75-20-C-TF					TF		-
LB-DG-75-20-C-7					7mm		-
LB-DG-75-20-C-3.5F					3.5F		-



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Diagonal Horn Antenna

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-75-25-A	10.0-15.0	WR75	Linear	25	FBP120(UBR120)	Al	-
LB-DG-75-25-C-SF					SF		-
LB-DG-75-25-C-NF					NF		-
LB-DG-75-25-C-TF					TF		-
LB-DG-75-25-C-7					7mm		-
LB-DG-75-25-C-3.5F					3.5F		-
LB-DG-62-20-A	12.4-18.0	WR62	Linear	20	FBP140(UBR140)	Al	117×117×233.2
LB-DG-62-20-C-SF					SF		117×117×260.2
LB-DG-62-20-C-NF					NF		117×117×260.2
LB-DG-62-20-C-TF					TF		117×117×260.2
LB-DG-62-20-C-7					7mm		117×117×260.2
LB-DG-62-20-C-3.5F					3.5F		117×117×260.2
LB-DG-62-25-A	12.4-18.0	WR62	Linear	25	FBP140(UBR140)	Al	215×215×496.2
LB-DG-62-25-C-SF					SF		215×215×523.2
LB-DG-62-25-C-NF					NF		215×215×523.2
LB-DG-62-25-C-TF					TF		215×215×523.2
LB-DG-62-25-C-7					7mm		215×215×523.2
LB-DG-62-25-C-3.5F					3.5F		215×215×523.2
LB-DG-51-20-A	15.0-22.0	WR51	Linear	20	FBP180(UBR180)	Al	-
LB-DG-51-20-C-SF					SF		-
LB-DG-51-25-A	15.0-22.0	WR51	Linear	25	FBP180(UBR180)	Al	-
LB-DG-51-25-C-SF					SF		-
LB-DG-42-20-A	18.0-26.5	WR42	Linear	20	FBP220(UBR220)	Al	87.6×87.6×161.3
LB-DG-42-20-C-SF					SF		87.6×87.6×196.3
LB-DG-42-20-C-KF					KF		87.6×87.6×196.3
LB-DG-42-20-C-3.5F					3.5F		87.6×87.6×196.3
LB-DG-42-25-A	18.0-26.5	WR42	Linear	25	FBP220(UBR220)	Al	172.4×172.4×393.7
LB-DG-42-25-C-SF					SF		172.4×172.4×428.7
LB-DG-42-25-C-KF					KF		172.4×172.4×428.7
LB-DG-42-25-C-3.5F					3.5F		172.4×172.4×428.7



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Diagonal Horn Antenna

Model	Freq.(GHz)	EIA WG	Pol.	Gain Typ.	Output	Mat.	Size (mm)
LB-DG-34-20-A	22.0-33.0	WR34	Linear	20	FBP260(UBR260)	Al	-
LB-DG-34-20-C-KF					KF		-
LB-DG-34-25-A	22.0-33.0	WR34	Linear	25	FBP260(UBR260)	Al	-
LB-DG-34-25-C-KF					KF		-
LB-DG-28-20-A	26.5-40.0	WR28	Linear	20	FBP320(UBR320)	Cu	55.3×55.3×106.7
LB-DG-28-20-C-KF					KF		55.3×55.3×130.7
LB-DG-28-20-C-2.4F					2.4F		55.3×55.3×130.7
LB-DG-28-25-A	26.5-40.0	WR28	Linear	25	FBP320(UBR320)	Cu	107×107×246.4
LB-DG-28-25-C-KF					KF		107×107×270.4
LB-DG-28-25-C-2.4F					2.4F		107×107×270.4
LB-DG-22-20-A	33.0-50.0	WR22	Linear	20	FUGP400(UG-383/U)	Cu	-
LB-DG-22-20-C-2.4F					2.4F		-
LB-DG-22-25-A	33.0-50.0	WR22	Linear	25	FUGP400(UG-383/U)	Cu	-
LB-DG-22-25-C-2.4F					2.4F		-
LB-DG-19-20-A	40.0-60.0	WR19	Linear	20	FUGP500(UG-383/U-M)	Cu	-
LB-DG-19-20-C-2.4F	40.0-50.0				2.4F		-
LB-DG-19-20-C-1.85F	40.0-60.0				1.85F		-
LB-DG-19-25-A	40.0-60.0	WR19	Linear	25	FUGP500(UG-383/U-M)	Cu	-
LB-DG-19-25-C-2.4F	40.0-50.0				2.4F		-
LB-DG-19-25-C-1.85F	40.0-60.0				1.85F		-
LB-DG-15-25-A	50.0-75.0	WR15	Linear	25	FUGP620(UG-385/U)	Cu	-
LB-DG-15-25-C-1.85F	50.0-65.0				1.85F		-
LB-DG-12-25-A	60.0-90.0	WR12	Linear	25	FUGP740(UG-387/U)	Cu	-
LB-DG-10-25-A	75.0-110.0	WR10	Linear	25	FUGP900(UG-387/U-M)	Cu	-
LB-DG-8-25-A	90.0-140.0	WR8	Linear	25	UG-387/U-M	Cu	-
LB-DG-6-25-A	110.0-170.0	WR6	Linear	25	UG-387/U-M	Cu	-
LB-DG-5-25-A	140.0-220.0	WR5	Linear	25	UG-387/U-M	Cu	-

Open Ended Waveguide Probes

Open Ended Waveguide Probes

Include the following Types Waveguide Probes :

1. Rectangular Waveguide Probes with Waveguide Interface (Table 1)
2. Rectangular Waveguide Probes with Waveguide Interface, Equipped with Absorber (Table 2)
3. Rectangular Waveguide Probes with Right Angle Coaxial Output (Table 3)
4. Rectangular Waveguide Probes with Right Angle Coaxial Output, Equipped with Absorber (Table 4)
5. Rectangular Waveguide Probes with Endlaunch Coaxial Output (Table 5)
6. Rectangular Waveguide Probes with Endlaunch Coaxial Output, Equipped with Absorber (Table 6)

A-INFO's Open Ended WG Probes have been specifically designed for near-field measurement. The EWG series Open Ended Waveguide Probes are Linear Polarization and are covering the frequency range from 0.32 to 750GHz by using standard WG band. All probes have an option of integration with absorber for better gain flatness and radiation pattern.

Model Information

Example Part Number: **90** **EWG** **N** **-A1**

EIA Waveguide Size: WR2300 to WR1.5

Product Code

EWG: for WG Output and Right Angle Coaxial Output

EWGE: for Endlaunch Coaxial Output

Coaxial Output Type Option, Leave it blank for WG output models.

7/16=7/16 DIN Female

N=N Type-Female; NM=N Type-Male;

S=SMA-Female; SM=SMA-Male;

3.5=3.5mm-Female; 3.5M=3.5mm-Male;

K=2.92mm-Female; KM=2.92mm-Male;

2.4=2.4mm-Female; 2.4M=2.4mm-Male;

1.85=1.85mm-Female; 1.85M=1.85mm-Male;

1.0=1.0mm-Female; 1.0M=1.0mm-Male

Option for Absorber



A1: Standard Absorber

Open Ended Waveguide Probes Accessories

1. Mounting Bracket
2. Tripod
3. Carrying Case

Open Ended Waveguide Probes

1. Rectangular Waveguide Probes with Waveguide Interface

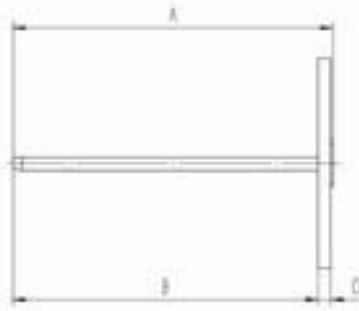

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Flange	Mat.	Size (mm)
42EWG	18.0-26.5	5	Linear	1.8	FBP220(UBR220)	Cu	101.6×101.6×159.8
34EWG	22.0-33.0	5	Linear	1.8	FBP260(UBR260)	Cu	101.6×101.6×159.8
28EWG	26.5-40.0	6	Linear	1.5	FBP320(UBR320)	Cu	101.6×101.6×159.8
22EWG	33.0-50.0	6	Linear	1.5	FUGP400(UG-383/U)	Cu	101.6×101.6×159.8
19EWG	40.0-60.0	6	Linear	1.5	FUGP500(UG-383/U-M)	Cu	101.6×101.6×159.8
15EWG	50.0-75.0	6	Linear	1.5	FUGP620(UG-385/U)	Cu	101.6×101.6×159.8
12EWG	60.0-90.0	6	Linear	1.5	FUGP740(UG-387/U)	Cu	101.6×101.6×159.8
10EWG	75.0-110.0	6	Linear	1.5	FUGP900(UG-387/U-M)	Cu	101.6×101.6×159.8
8EWG	90.0-140.0	6	Linear	1.5	UG-387/U-M	Cu	19.1×19.1×50.8
6EWG	110.0-170.0	6	Linear	1.5	UG-387/U-M	Cu	19.1×19.1×50.8
5EWG	140.0-220.0	6	Linear	1.5	UG-387/U-M	Cu	19.1×19.1×50.8
4EWG	170.0-260.0	6	Linear	1.5	APF4	Cu	19.1×19.1×25.4
3EWG	220.0-325.0	7	Linear	1.5	APF3	Cu	19.1×19.1×25.4
2.8EWG	260.0-400.0	7	Linear	1.5	APF2.8	Cu	19.1×19.1×25.4
2.2EWG	325.0-500.0	7	Linear	1.5	APF2.2	Cu	19.1×19.1×25.4
1.5EWG	500.0-750.0	7	Linear	1.5	APF1.5	Cu	19.1×19.1×25.4





pradeep@rfconnector.in

9810138894

www.synergyppl.com

Open Ended Waveguide Probes

2. Rectangular Waveguide Probes with Waveguide Interface, Equipped with Absorber

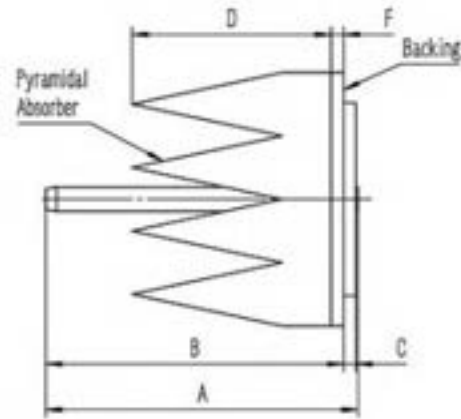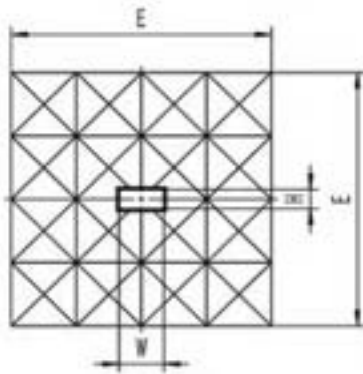

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Flange	Mat.	Size (mm)
42EWG-A1	18.0-26.5	5	Linear	1.8	FBP220(UBR220)	Cu	399.6×399.6×159.8
34EWG-A1	22.0-33.0	5	Linear	1.8	FBP260(UBR260)	Cu	399.6×399.6×159.8
28EWG-A1	26.5-40.0	6	Linear	1.5	FBP320(UBR320)	Cu	399.6×399.6×159.8
22EWG-A1	33.0-50.0	6	Linear	1.5	FUGP400(UG-383/U)	Cu	399.6×399.6×159.8
19EWG-A1	40.0-60.0	6	Linear	1.5	FUGP500(UG-383/U-M)	Cu	399.6×399.6×159.8
15EWG-A1	50.0-75.0	6	Linear	1.5	FUGP620(UG-385/U)	Cu	399.6×399.6×159.8
12EWG-A1	60.0-90.0	6	Linear	1.5	FUGP740(UG-387/U)	Cu	399.6×399.6×159.8
10EWG-A1	75.0-110.0	6	Linear	1.5	FUGP900(UG-387/U-M)	Cu	399.6×399.6×159.8






pradeep@rfconnector.in

9810138894

www.synergypcl.com

Open Ended Waveguide Probes

3. Rectangular Waveguide Probes with Right Angle Coaxial Output



Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
2300EWGN	0.32-0.49	5	Linear	2	N-F	500	Al	676.3×384.2×1344.8
2300EWGS					SMA-F	50		676.3×384.2×1344.8
2300EWG7/16					7/16 DIN-F	800		676.3×384.2×1344.8
2100EWGN	0.35-0.53	5	Linear	2	N-F	500	Al	625.5×358.8×1298.8
2100EWGS					SMA-F	50		625.5×358.8×1298.8
2100EWG7/16					7/16 DIN-F	800		625.5×358.8×1298.8
1800EWGN	0.41-0.62	5	Linear	2	N-F	500	Al	546.1×317.5×1229.8
1800EWGS					SMA-F	50		546.1×317.5×1229.8
1800EWG7/16					7/16 DIN-F	800		546.1×317.5×1229.8
1500EWGN	0.49-0.75	5	Linear	2	N-F	500	Al	469.9×279.4×1160.8
1500EWGS					SMA-F	50		469.9×279.4×1160.8
1500EWG7/16					7/16 DIN-F	800		469.9×279.4×1160.8
1150EWGN	0.64-0.96	5	Linear	2	N-F	500	Al	381×235×1080.8
1150EWGS					SMA-F	50		381×235×1080.8
1150EWG7/16					7/16 DIN-F	800		381×235×1080.8
975EWGN	0.75-1.12	5	Linear	2	N-F	300	Al	336.6×212.7×994
975EWGS					SMA-F	50		336.6×212.7×994
975EWG7/16					7/16 DIN-F	500		336.6×212.7×994
770EWGN	0.96-1.45	5	Linear	2	N-F	300	Al	285×186.7×1098.5
770EWGS					SMA-F	50		285×186.7×1098.5
770EWG7/16					7/16 DIN-F	500		285×186.7×1098.5
650EWGN	1.12-1.7	5	Linear	2	N-F	300	Al	220.7×141.3×963.5
650EWGS					SMA-F	50		220.7×143.3×963.5
650EWG7/16					7/16 DIN-F	500		220.7×146.8×963.5
510EWGN	1.45-2.2	5	Linear	2	N-F	300	Al	185×123.4×772.7
510EWGS					SMA-F	50		185×125.4×772.7
510EWG7/16					7/16 DIN-F	500		185×128.9×772.7

Open Ended Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
430EWGN	1.7-2.6	5	Linear	2	N-F	300	Al	161×111.5×638.1
430EWGS					SMA-F	50		161×113.5×638.1
430EWG7/16					7/16 DIN-F	500		161×117×638.1
340EWGN	2.2-3.3	5	Linear	2	N-F	300	Al	138.1×100.2×553.8
340EWGS					SMA-F	50		138.1×102.2×553.8
340EWG7/16					7/16 DIN-F	500		138.1×105.7×553.8
284EWGN	2.6-3.95	5	Linear	2	N-F	300	Al	134.9×134.9×433.3
284EWGS					SMA-F	50		134.9×134.9×433.3
284EWG7/16					7/16 DIN-F	500		134.9×134.9×433.3
229EWGN	3.3-4.9	5	Linear	2	N-F	150	Al	134.9×134.9×373.4
229EWGS					SMA-F	50		134.9×134.9×373.4
229EWGT					TNC-F	150		134.9×134.9×373.4
229EWG7					7mm	150		134.9×134.9×373.4
229EWG3.5					3.5mm-F	50		134.9×134.9×373.4
187EWGN	3.95-5.85	5	Linear	2	N-F	150	Al	101.6×101.6×293.3
187EWGS					SMA-F	50		101.6×101.6×293.3
187EWGT					TNC-F	150		101.6×101.6×293.3
187EWG7					7mm	150		101.6×101.6×293.3
187EWG3.5					3.5mm-F	50		101.6×101.6×293.3
159EWGN	4.9-7.05	5	Linear	2	N-F	150	Al	101.6×101.6×280.1
159EWGS					SMA-F	50		101.6×101.6×280.1
159EWGT					TNC-F	150		101.6×101.6×280.1
159EWG7					7mm	150		101.6×101.6×280.1
159EWG3.5					3.5mm-F	50		101.6×101.6×280.1
137EWGN	5.85-8.2	5	Linear	2	N-F	150	Al	101.6×101.6×252.9
137EWGS					SMA-F	50		101.6×101.6×252.9
137EWGT					TNC-F	150		101.6×101.6×252.9
137EWG7					7mm	150		101.6×101.6×252.9
137EWG3.5					3.5mm-F	50		101.6×101.6×252.9
112EWGN	7.05-10.0	5	Linear	2	N-F	150	Al	101.6×101.6×250.8
112EWGS					SMA-F	50		101.6×101.6×250.8
112EWGT					TNC-F	150		101.6×101.6×250.8
112EWG7					7mm	150		101.6×101.6×250.8
112EWG3.5					3.5mm-F	50		101.6×101.6×250.8
90EWGS	8.2-12.4	5	Linear	2	SMA-F	50	Al	101.6×101.6×195.3
90EWGN					N-F	150		101.6×101.6×195.3
90EWGT					TNC-F	150		101.6×101.6×195.3
90EWG7					7mm	150		101.6×101.6×195.3
90EWG3.5					3.5mm-F	50		101.6×101.6×195.3





pradeep@rfconnector.in

9810138894

www.synergypnl.com

Open Ended Waveguide Probes

4. Rectangular Waveguide Probes with Right Angle Coaxial Output, Equipped with Absorber

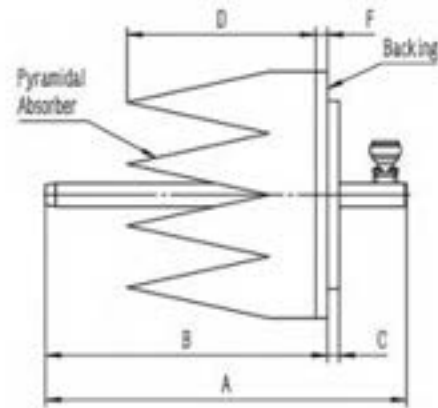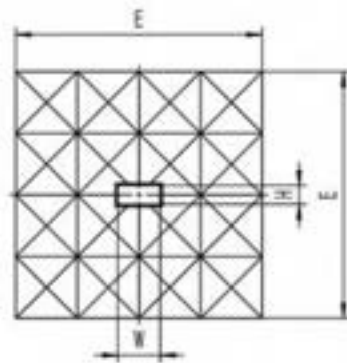

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
2300EWGN-A1	0.32-0.49	5	Linear	2	N-F	500	Al	-
2300EWGS-A1					SMA-F	50		-
2300EWG7/16-A1					7/16 DIN-F	800		-
2100EWGN-A1	0.35-0.53	5	Linear	2	N-F	500	Al	-
2100EWGS-A1					SMA-F	50		-
2100EWG7/16-A1					7/16 DIN-F	800		-
1800EWGN-A1	0.41-0.62	5	Linear	2	N-F	500	Al	-
1800EWGS-A1					SMA-F	50		-
1800EWG7/16-A1					7/16 DIN-F	800		-
1500EWGN-A1	0.49-0.75	5	Linear	2	N-F	500	Al	600×600×1160.8
1500EWGS-A1					SMA-F	50		600×600×1160.8
1500EWG7/16-A1					7/16 DIN-F	800		600×600×1160.8
1150EWGN-A1	0.64-0.96	5	Linear	2	N-F	500	Al	600×600×1080.8
1150EWGS-A1					SMA-F	50		600×600×1080.8
1150EWG7/16-A1					7/16 DIN-F	800		600×600×1080.8
975EWGN-A1	0.75-1.12	5	Linear	2	N-F	300	Al	600×600×994
975EWGS-A1					SMA-F	50		600×600×994
975EWG7/16-A1					7/16 DIN-F	500		600×600×994
770EWGN-A1	0.96-1.45	5	Linear	2	N-F	300	Al	600×600×1098.5
770EWGS-A1					SMA-F	50		600×600×1098.5
770EWG7/16-A1					7/16 DIN-F	500		600×600×1098.5

Open Ended Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
650EWGN-A1	1.12-1.7	5	Linear	2	N-F	300	Al	600×600×963.5
650EWGS-A1					SMA-F	50		600×600×963.5
650EWG7/16-A1					7/16 DIN-F	500		600×600×963.5
510EWGN-A1	1.45-2.2	5	Linear	2	N-F	300	Al	600×600×772.7
510EWGS-A1					SMA-F	50		600×600×772.7
510EWG7/16-A1					7/16 DIN-F	500		600×600×772.7
430EWGN-A1	1.7-2.6	5	Linear	2	N-F	300	Al	600×600×638.1
430EWGS-A1					SMA-F	50		600×600×638.1
430EWG7/16-A1					7/16 DIN-F	500		600×600×638.1
340EWGN-A1	2.2-3.3	5	Linear	2	N-F	300	Al	600×600×553.8
340EWGS-A1					SMA-F	50		600×600×553.8
340EWG7/16-A1					7/16 DIN-F	500		600×600×553.8
284EWGN-A1	2.6-3.95	5	Linear	2	N-F	300	Al	480×480×433.3
284EWGS-A1					SMA-F	50		480×480×433.3
284EWG7/16-A1					7/16 DIN-F	500		480×480×433.3
229EWGN-A1	3.3-4.9	5	Linear	2	N-F	150	Al	480×480×373.4
229EWGS-A1					SMA-F	50		480×480×373.4
229EWGT-A1					TNC-F	150		480×480×373.4
229EWG7-A1					7mm	150		480×480×373.4
229EWG3.5-A1					3.5mm-F	50		480×480×373.4
187EWGN-A1	3.95-5.85	5	Linear	2	N-F	150	Al	400×400×293.3
187EWGS-A1					SMA-F	50		400×400×293.3
187EWGT-A1					TNC-F	150		400×400×293.3
187EWG7-A1					7mm	150		400×400×293.3
187EWG3.5-A1					3.5mm-F	50		400×400×293.3
159EWGN-A1	4.9-7.05	5	Linear	2	N-F	150	Al	400×400×280.1
159EWGS-A1					SMA-F	50		400×400×280.1
159EWGT-A1					TNC-F	150		400×400×280.1
159EWG7-A1					7mm	150		400×400×280.1
159EWG3.5-A1					3.5mm-F	50		400×400×280.1
137EWGN-A1	5.85-8.2	5	Linear	2	N-F	150	Al	400×400×252.9
137EWGS-A1					SMA-F	50		400×400×252.9
137EWGT-A1					TNC-F	150		400×400×252.9
137EWG7-A1					7mm	150		400×400×252.9
137EWG3.5-A1					3.5mm-F	50		400×400×252.9



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Open Ended Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
112EWGN-A1	7.05-10.0	5	Linear	2	N-F	150	Al	400×400×250.8
112EWGS-A1					SMA-F	50		400×400×250.8
112EWGT-A1					TNC-F	150		400×400×250.8
112EWG7-A1					7mm	150		400×400×250.8
112EWG3.5-A1					3.5mm-F	50		400×400×250.8
90EWGS-A1	8.2-12.4	5	Linear	2	SMA-F	50	Al	399.6×399.6×195.3
90EWGN-A1					N-F	150		399.6×399.6×195.3
90EWGT-A1					TNC-F	150		399.6×399.6×195.3
90EWG7-A1					7mm	150		399.6×399.6×195.3
90EWG3.5-A1					3.5mm-F	50		399.6×399.6×195.3
75EWGS-A1	10.0-15.0	5	Linear	2	SMA-F	50	Al	399.6×399.6×193.9
75EWGN-A1					N-F	150		399.6×399.6×193.9
75EWGT-A1					TNC-F	150		399.6×399.6×193.9
75EWG7-A1					7mm	150		399.6×399.6×193.9
75EWG3.5-A1					3.5mm-F	50		399.6×399.6×193.9
62EWGS-A1	12.4-18.0	5	Linear	2	SMA-F	50	Al	399.6×399.6×192.6
62EWGN-A1					N-F	150		399.6×399.6×192.6
62EWGT-A1					TNC-F	150		399.6×399.6×192.6
62EWG7-A1					7mm	150		399.6×399.6×192.6
62EWG3.5-A1					3.5mm-F	50		399.6×399.6×192.6
51EWGS-A1	15.0-22.0	5	Linear	2	SMA-F	50	Cu	399.6×399.6×191.7
42EWGS-A1	18.0-26.5	5	Linear	2	SMA-F	50	Cu	399.6×399.6×194.8
42EWGK-A1					2.92mm-F	20		399.6×399.6×194.8
42EWG3.5-A1					3.5mm-F	50		399.6×399.6×194.8
34EWGK-A1	22.0-33.0	5	Linear	2	2.92mm-F	20	Cu	399.6×399.6×183.8
28EWGK-A1	26.5-40.0	5	Linear	2	2.92mm-F	20	Cu	399.6×399.6×183.8
28EWG2.4-A1	26.5-40.0				2.4mm-F	10		399.6×399.6×183.8
28EWG2.4-64-A1	22.5-45.0				2.4mm-F	10		399.6×399.6×182.6
28EWG2.4-68-A1	24.0-50.0				2.4mm-F	10		399.6×399.6×183.4
28EWG2.4-72-A1	24.0-54.0				2.4mm-F	10		399.6×399.6×183.8
22EWG2.4-A1	33.0-50.0	5	Linear	1.5	2.4mm-F	10	Cu	399.6×399.6×183.8
19EWG1.85-A1	40.0-60.0	5	Linear	1.5	1.85mm-F	5	Cu	399.6×399.6×185.8
19EWG2.4-A1	40.0-50.0				2.4mm-F	10		399.6×399.6×185.8
15EWG1.85-A1	50.0-65.0	5	Linear	2	1.85mm-F	5	Cu	399.6×399.6×187.8
15EWG1.0-A1	50.0-75.0	5	Linear	2	1.0mm-F	3	Cu	399.6×399.6×187.8
12EWG1.0-A1	60.0-90.0	6	Linear	2	1.0mm-F	3	Cu	399.6×399.6×185.2
10EWG1.0-A1	75.0-110.0	6	Linear	2	1.0mm-F	3	Cu	399.6×399.6×185.2






pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Open Ended Waveguide Probes

5. Rectangular Waveguide Probes with Endlaunch Coaxial Output



Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
975EWGEN	0.75-1.12	5	Linear	2	N-F	300	Al	336.6×212.7×1134.5
770EWGEN	0.96-1.45	5	Linear	2	N-F	300	Al	-
650EWGEN	1.12-1.7	5	Linear	2	N-F	300	Al	220.7×138.1×1039.5
510EWGEN	1.45-2.2	5	Linear	2	N-F	300	Al	-
430EWGEN	1.7-2.6	5	Linear	2	N-F	300	Al	161×106.4×698.1
430EWGES					SMA-F	50		161×106.4×683.5
340EWGEN	2.2-3.3	5	Linear	2	N-F	300	Al	138.1×95.3×597.2
340EWGES					SMA-F	50		138.1×95.3×582.6
284EWGEN	2.6-3.95	5	Linear	2	N-F	300	Al	134.9×134.9×477.4
284EWGES					SMA-F	50		134.9×134.9×462.8
229EWGEN	3.3-4.9	5	Linear	2	N-F	150	Al	134.9×134.9×411.5
229EWGES					SMA-F	50		134.9×134.9×396.9
187EWGEN	3.95-5.85	5	Linear	2	N-F	150	Al	101.6×101.6×324.3
187EWGES					SMA-F	50		101.6×101.6×309.7
159EWGEN	4.9-7.05	5	Linear	2	N-F	150	Al	101.6×101.6×316.3
159EWGES					SMA-F	50		101.6×101.6×301.7
137EWGEN	5.85-8.2	5	Linear	2	N-F	150	Al	101.6×101.6×284.9
137EWGES					SMA-F	50		101.6×101.6×270.3
112EWGEN	7.05-10	5	Linear	2	N-F	150	Al	101.6×101.6×276.9
112EWGES					SMA-F	50		101.6×101.6×262.3
90EWGES	8.2-12.4	5	Linear	2	SMA-F	50	Al	101.6×101.6×206.2
90EWGEN					N-F	150		101.6×101.6×220.8
75EWGES	10.0-15.0	5	Linear	2	SMA-F	50	Al	101.6×101.6×198.2
75EWGEN					N-F	150		101.6×101.6×212.8
62EWGES	12.4-18.0	5	Linear	2	SMA-F	50	Al	101.6×101.6×195.2
62EWGEN					N-F	150		101.6×101.6×209.8
51EWGES	15.0-22.0	5	Linear	2	SMA-F	50	Cu	101.6×101.6×195.2
42EWGES	18.0-26.5	5	Linear	2	SMA-F	50	Cu	101.6×101.6×194.2
42EWGEK					2.92mm-F	20		101.6×101.6×194.2



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Open Ended Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
34EWGEK	22.0-33.0	5	Linear	2	2.92mm-F	20	Cu	101.6×101.6×194.2
28EWGEK	26.5-40.0	5	Linear	2	2.92mm-F	20	Cu	101.6×101.6×194.2
28EWGE2.4					2.4mm-F	10		101.6×101.6×195.5
22EWGE2.4	33.0-50.0	5	Linear	1.5	2.4mm-F	10	Cu	101.6×101.6×185.5
19EWGE1.85	40.0-60.0	5	Linear	1.5	1.85mm-F	5	Cu	101.6×101.6×182.5
19EWGE2.4	40.0-50.0				2.4mm-F	10		101.6×101.6×182.9
15EWGE1.85	50.0-65.0	5	Linear	2	1.85mm-F	5	Cu	101.6×101.6×187.7
15EWGE1.0	50.0-75.0	5	Linear	2	1.0mm-F	3	Cu	101.6×101.6×179.4
12EWGE1.0	60.0-90.0	6	Linear	2	1.0mm-F	3	Cu	101.6×101.6×179.4
10EWGE1.0	75.0-110.0	6	Linear	2	1.0mm-F	3	Cu	101.6×101.6×179.4





pradeep@rfconnector.in

9810138894

www.synergypnl.com

Open Ended Waveguide Probes

6. Rectangular Waveguide Probes with Endlaunch Coaxial Output, Equipped with Absorber

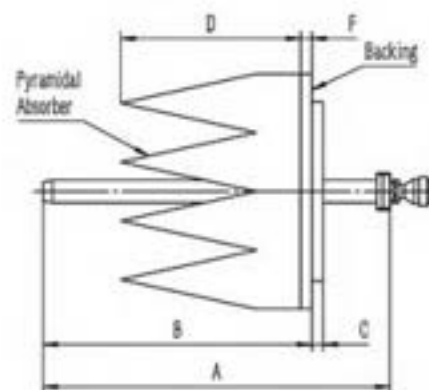

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
975EWGEN-A1	0.75-1.12	5	Linear	2	N-F	300	Al	600×600×1134.5
770EWGEN-A1	0.96-1.45	5	Linear	2	N-F	300	Al	-
650EWGEN-A1	1.12-1.7	5	Linear	2	N-F	300	Al	600×600×1039.5
510EWGEN-A1	1.45-2.2	5	Linear	2	N-F	300	Al	-
430EWGEN-A1	1.7-2.6	5	Linear	2	N-F	300	Al	600×600×698.1
430EWGES-A1					SMA-F	50		600×600×683.5
340EWGEN-A1	2.2-3.3	5	Linear	2	N-F	300	Al	600×600×597.2
340EWGES-A1					SMA-F	50		600×600×582.6
284EWGEN-A1	2.6-3.95	5	Linear	2	N-F	300	Al	480×480×477.4
284EWGES-A1					SMA-F	50		480×480×462.8
229EWGEN-A1	3.3-4.9	5	Linear	2	N-F	150	Al	480×480×411.5
229EWGES-A1					SMA-F	50		480×480×396.9
187EWGEN-A1	3.95-5.85	5	Linear	2	N-F	150	Al	400×400×324.3
187EWGES-A1					SMA-F	50		400×400×309.7
159EWGEN-A1	4.9-7.05	5	Linear	2	N-F	150	Al	400×400×316.3
159EWGES-A1					SMA-F	50		400×400×301.7
137EWGEN-A1	5.85-8.2	5	Linear	2	N-F	150	Al	400×400×284.9
137EWGES-A1					SMA-F	50		400×400×270.3
112EWGEN-A1	7.05-10.0	5	Linear	2	N-F	150	Al	400×400×276.9
112EWGES-A1					SMA-F	50		400×400×262.3
90EWGES-A1	8.2-12.4	5	Linear	2	SMA-F	50	Al	399.6×399.6×206.2
90EWGEN-A1					N-F	150		399.6×399.6×220.8



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Open Ended Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling (W) CW	Mat.	Size (mm)
75EWGES-A1	10.0-15.0	5	Linear	2	SMA-F	50	Al	399.6×399.6×198.2
75EWGEN-A1					N-F	150		399.6×399.6×212.8
62EWGES-A1	12.4-18.0	5	Linear	2	SMA-F	50	Al	399.6×399.6×195.2
62EWGEN-A1					N-F	150		399.6×399.6×209.8
51EWGES-A1	15.0-22.0	5	Linear	2	SMA-F	50	Cu	399.6×399.6×195.2
42EWGES-A1	18.0-26.5	5	Linear	2	SMA-F	50	Cu	399.6×399.6×194.2
42EWGEK-A1					2.92mm-F	20		399.6×399.6×194.2
34EWGEK-A1	22.0-33.0	5	Linear	2	2.92mm-F	20	Cu	399.6×399.6×194.2
28EWGEK-A1	26.5-40.0	5	Linear	2	2.92mm-F	20	Cu	399.6×399.6×194.2
28EWGE2.4-A1					2.4mm-F	10		399.6×399.6×195.5
22EWGE2.4-A1	33.0-50.0	5	Linear	1.5	2.4mm-F	10	Cu	399.6×399.6×185.5
19EWGE1.85-A1	40.0-60.0	5	Linear	1.5	1.85mm-F	5	Cu	399.6×399.6×182.5
19EWGE2.4-A1	40.0-50.0				2.4mm-F	10		399.6×399.6×182.9
15EWGE1.85-A1	50.0-65.0	5	Linear	2	1.85mm-F	5	Cu	399.6×399.6×187.7
15EWGE1.0-A1	50.0-75.0	5	Linear	2	1.0mm-F	3	Cu	399.6×399.6×179.4
12EWGE1.0-A1	60.0-90.0	6	Linear	2	1.0mm-F	3	Cu	399.6×399.6×179.4
10EWGE1.0-A1	75.0-110.0	6	Linear	2	1.0mm-F	3	Cu	399.6×399.6×179.4

Dual Polarization Waveguide Probes

Dual Polarization Waveguide Probes

Include the following Types Dual Pol. Waveguide Probes:

1. Dual Pol. Waveguide Probes with Waveguide Interface (Table 1)
2. Dual Pol. Waveguide Probes with Waveguide Interface, Equipped with Absorber (Table 2)
3. Dual Pol. Waveguide Probes with Right Angle Coaxial Interface (Table 3)
4. Dual Pol. Waveguide Probes with Right Angle Coaxial Interface, Equipped with Absorber (Table 4)
5. Dual Pol. Waveguide Probes with V Port Endlaunch Coaxial Interface (Table 5)
6. Dual Pol. Waveguide Probes with V Port Endlaunch Coaxial Interface, Equipped with Absorber (Table 6)

A-INFO's Dual Polarization WG Probes have been specifically designed for near-field measurement. The EWG series Dual Polarization Waveguide Probes are dual Polarization and are covering the frequency range from 2.6 to 220GHz by using standard WG band. All probes have an option of integration with absorber for better gain flatness and radiation pattern.

Model Information

Example Part Number:	90	EWG	N	-T02	-A1
EIA Waveguide Size: WR284 to WR5					
Product Code					
Coaxial Output Type Option, Leave it blank for WG output models.					
7/16F=7/16 DIN Female NF=N Type-Female; NM=N Type-Male; SF=SMA-Female; SM=SMA-Male; TF=TNC-Female; TM=TNC-Male; 7=7mm; 3.5F=3.5mm-Female; 3.5M=3.5mm-Male; KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-Female; 2.4M=2.4mm-Male; 1.85F=1.85mm-Female; 1.85M=1.85mm-Male 1.0F=1.0mm-Female; 1.0M=1.0mm-Male					
For Endlaunch Coaxial Output on Port V Add E after Connector Designation, for example, 90EWGNE-T02-A1					
Polarization options, For Dual Pol. modules.					
Option for Absorber A1: Standard Absorber					




pradeep@rfconnector.in

9810138894

www.synergypnl.com

Dual Polarization Waveguide Probes

1. Dual Pol. Waveguide Probes with Waveguide Interface

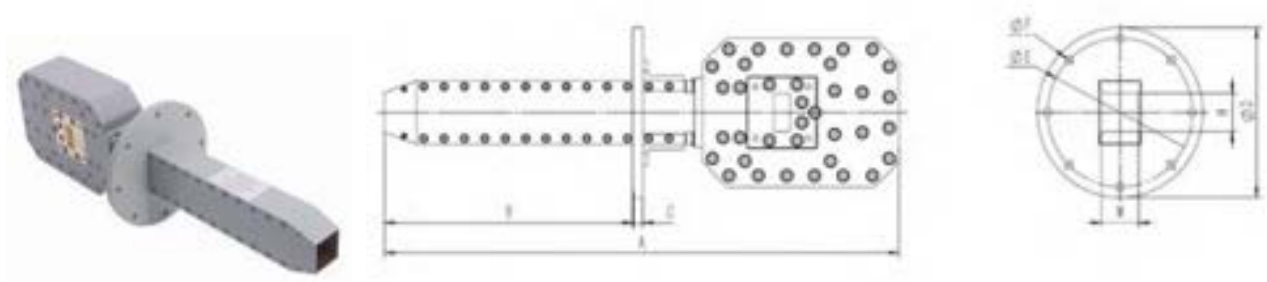

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Flange	Mat.	Size (mm)
284EWG-T02	2.6-3.95	8	Dual Linear	1.5	FDP32(UDR32)	Al	-
229EWG-T02	3.3-4.9	8	Dual Linear	1.5	FDP40(UDR40)	Al	-
187EWG-T02	3.95-5.85	8	Dual Linear	1.5	FDP48(UDR48)	Al	-
159EWG-T02	4.9-7.05	8	Dual Linear	1.5	FDP58(UDR58)	Al	-
137EWG-T02	5.85-8.2	8	Dual Linear	1.5	FDP70(UDR70)	Al	101.6×101.6×392.6
112EWG-T02	7.05-10	8	Dual Linear	1.5	FBP84(UBR84)	Al	-
90EWG-T02	8.2-12.4	8	Dual Linear	1.4	FBP100(UBR100)	Al	101.6×101.6×315.9
75EWG-T02	10.0-15.0	8	Dual Linear	1.5	FBP120(UBR120)	Al	101.6×101.6×295.5
62EWG-T02	12.4-18.0	8	Dual Linear	1.6	FBP140(UBR140)	Al	101.6×101.6×268.8
51EWG-T02	15.0-22.0	8	Dual Linear	1.6	FBP180(UBR180)	Cu	101.6×101.6×262.9
42EWG-T02	18.0-26.5	8	Dual Linear	1.6	FBP220(UBR220)	Cu	101.6×101.6×245.6
34EWG-T02	22.0-33.0	8	Dual Linear	1.6	FBP260(UBR260)	Cu	101.6×101.6×234.6
28EWG-T02	26.5-40.0	8	Dual Linear	1.5	FBP320(UBR320)	Cu	101.6×101.6×225.71
28EWG-T62	23.5-43.5	8	Dual Linear	1.8	FBP320(UBR320)	Cu	101.6×101.6×237.1
28EWG-T63	23.0-44.0	8	Dual Linear	2	FBP320(UBR320)	Cu	101.6×101.6×228.2
28EWG-T64	22.5-45.0	8	Dual Linear	2	FBP320(UBR320)	Cu	101.6×101.6×264.2
22EWG-T02	33.0-50.0	9	Dual Linear	1.6	FUGP400(UG-383/U)	Cu	101.6×101.6×226.98
19EWG-T02	40.0-60.0	9	Dual Linear	1.6	FUGP500(UG-383/U-M)	Cu	101.6×101.6×228.98
15EWG-T02	50.0-75.0	9	Dual Linear	1.6	FUGP620(UG-385/U)	Cu	101.6×101.6×214.16
12EWG-T02	60.0-90.0	9	Dual Linear	1.6	FUGP740(UG-387/U)	Cu	101.6×101.6×218.27
10EWG-T02	75.0-110.0	9	Dual Linear	1.6	FUGP900(UG-387/U-M)	Cu	101.6×101.6×218.22
8EWG-T02	90.0-140.0	9	Dual Linear	1.6	UG-387/U-M	Cu	-
6EWG-T02	110.0-170.0	9	Dual Linear	1.8	UG-387/U-M	Cu	-
5EWG-T02	140.0-220.0	9	Dual Linear	2	UG-387/U-M	Cu	-



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Dual Polarization Waveguide Probes

2. Dual Pol. Waveguide Probes with Waveguide Interface, Equipped with Absorber



Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Flange	Mat.	Size (mm)
284EWG-T02-A1	2.6-3.95	8	Dual Linear	1.5	FDP32(UDR32)	Al	-
229EWG-T02-A1	3.3-4.9	8	Dual Linear	1.5	FDP40(UDR40)	Al	-
187EWG-T02-A1	3.95-5.85	8	Dual Linear	1.5	FDP48(UDR48)	Al	-
159EWG-T02-A1	4.9-7.05	8	Dual Linear	1.5	FDP58(UDR58)	Al	-
137EWG-T02-A1	5.85-8.2	8	Dual Linear	1.5	FDP70(UDR70)	Al	400×400×392.55
112EWG-T02-A1	7.05-10.0	8	Dual Linear	1.5	FBP84(UBR84)	Al	-
90EWG-T02-A1	8.2-12.4	8	Dual Linear	1.4	FBP100(UBR100)	Al	399.6×399.6×315.9
75EWG-T02-A1	10.0-15.0	8	Dual Linear	1.5	FBP120(UBR120)	Al	399.6×399.6×295.45
62EWG-T02-A1	12.4-18.0	8	Dual Linear	1.5	FBP140(UBR140)	Al	399.6×399.6×268.8
51EWG-T02-A1	15.0-22.0	8	Dual Linear	1.5	FBP180(UBR180)	Cu	399.6×399.6×262.92
42EWG-T02-A1	18.0-26.5	8	Dual Linear	1.5	FBP220(UBR220)	Cu	399.6×399.6×245.6
34EWG-T02-A1	22.0-33.0	8	Dual Linear	1.5	FBP260(UBR260)	Cu	399.6×399.6×245.6
28EWG-T02-A1	26.5-40.0	8	Dual Linear	1.5	FBP320(UBR320)	Cu	399.6×399.6×225.66
28EWG-T62-A1	23.5-43.5	8	Dual Linear	1.8	FBP320(UBR320)	Cu	399.6×399.6×237.1
28EWG-T63-A1	23.0-44.0	8	Dual Linear	2	FBP320(UBR320)	Cu	399.6×399.6×228.2
28EWG-T64-A1	22.5-45.0	8	Dual Linear	2	FBP320(UBR320)	Cu	399.6×399.6×264.2
22EWG-T02-A1	33.0-50.0	9	Dual Linear	1.5	FUGP400(UG-383/U)	Cu	399.6×399.6×226.98
19EWG-T02-A1	40.0-60.0	9	Dual Linear	1.5	FUGP500(UG-383/U-M)	Cu	399.6×399.6×228.98
15EWG-T02-A1	50.0-75.0	9	Dual Linear	1.5	FUGP620(UG-385/U)	Cu	399.6×399.6×214.16
12EWG-T02-A1	60.0-90.0	9	Dual Linear	1.5	FUGP740(UG-387/U)	Cu	399.6×399.6×218.27
10EWG-T02-A1	75.0-110.0	9	Dual Linear	1.5	FUGP900(UG-387/U-M)	Cu	399.6×399.6×218.22



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES




pradeep@rfconnector.in

9810138894

www.synergypnl.com

Dual Polarization Waveguide Probes

3. Dual Pol. Waveguide Probes with Right Angle Coaxial Interface

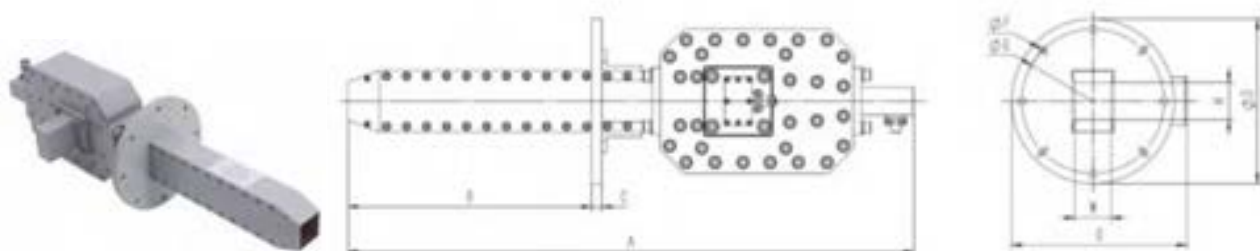

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
284EWGN-T02	2.6-3.95	8	Dual Linear	1.6	N-F	300	Al	-
284EWGS-T02	2.6-3.95	8	Dual Linear	1.6	SMA-F	50	Al	-
284EWG7/16-T02	2.6-3.95	8	Dual Linear	1.6	7/16 DIN-F	500	Al	-
229EWGN-T02	3.3-4.9	8	Dual Linear	1.6	N-F	150	Al	-
229EWGS-T02	3.3-4.9	8	Dual Linear	1.6	SMA-F	50	Al	-
229EWGT-T02	3.3-4.9	8	Dual Linear	1.6	TNC-F	150	Al	-
229EWG7-T02	3.3-4.9	8	Dual Linear	1.6	7mm	150	Al	-
229EWG3.5-T02	3.3-4.9	8	Dual Linear	1.6	3.5mm-F	50	Al	-
187EWGN-T02	3.95-5.85	8	Dual Linear	1.6	N-F	150	Al	-
187EWGS-T02	3.95-5.85	8	Dual Linear	1.6	SMA-F	50	Al	-
187EWGT-T02	3.95-5.85	8	Dual Linear	1.6	TNC-F	150	Al	-
187EWG7-T02	3.95-5.85	8	Dual Linear	1.6	7mm	150	Al	-
187EWG3.5-T02	3.95-5.85	8	Dual Linear	1.6	3.5mm-F	50	Al	-
159EWGN-T02	4.9-7.05	8	Dual Linear	1.6	N-F	150	Al	-
159EWGS-T02	4.9-7.05	8	Dual Linear	1.6	SMA-F	50	Al	-
159EWGT-T02	4.9-7.05	8	Dual Linear	1.6	TNC-F	150	Al	-
159EWG7-T02	4.9-7.05	8	Dual Linear	1.6	7mm	150	Al	-
159EWG3.5-T02	4.9-7.05	8	Dual Linear	1.6	3.5mm-F	50	Al	-
137EWGN-T02	5.85-8.2	8	Dual Linear	1.6	N-F	150	Al	132.95×101.6×440.55
137EWGS-T02	5.85-8.2	8	Dual Linear	1.6	SMA-F	50	Al	132.95×101.6×440.55
137EWGT-T02	5.85-8.2	8	Dual Linear	1.6	TNC-F	150	Al	132.95×101.6×440.55
137EWG7-T02	5.85-8.2	8	Dual Linear	1.6	7mm	150	Al	132.95×101.6×440.55
137EWG3.5-T02	5.85-8.2	8	Dual Linear	1.6	3.5mm-F	50	Al	132.95×101.6×440.55



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
112EWGN-T02	7.05-10.0	8	Dual Linear	1.6	N-F	150	Al	-
112EWGS-T02	7.05-10.0	8	Dual Linear	1.6	SMA-F	50	Al	-
112EWGT-T02	7.05-10.0	8	Dual Linear	1.6	TNC-F	150	Al	-
112EWG7-T02	7.05-10.0	8	Dual Linear	1.6	7mm	150	Al	-
112EWG3.5-T02	7.05-10.0	8	Dual Linear	1.6	3.5mm-F	50	Al	-
90EWGS-T02	8.2-12.4	8	Dual Linear	1.5	SMA-F	50	Al	109.5×101.6×353.9
90EWGN-T02	8.2-12.4	8	Dual Linear	1.5	N-F	150	Al	109.5×101.6×353.9
90EWGT-T02	8.2-12.4	8	Dual Linear	1.5	TNC-F	150	Al	109.5×101.6×353.9
90EWG7-T02	8.2-12.4	8	Dual Linear	1.5	7mm	150	Al	109.5×101.6×353.9
90EWG3.5-T02	8.2-12.4	8	Dual Linear	1.5	3.5mm-F	50	Al	109.5×101.6×353.9
75EWGS-T02	10.0-15.0	8	Dual Linear	1.5	SMA-F	50	Al	101.6×101.6×325.45
75EWGN-T02	10.0-15.0	8	Dual Linear	1.5	N-F	150	Al	101.6×101.6×325.45
75EWGT-T02	10.0-15.0	8	Dual Linear	1.5	TNC-F	150	Al	101.6×101.6×325.45
75EWG7-T02	10.0-15.0	8	Dual Linear	1.5	7mm	150	Al	101.6×101.6×325.45
75EWG3.5-T02	10.0-15.0	8	Dual Linear	1.5	3.5mm-F	50	Al	101.6×101.6×325.45
62EWGS-T02	12.4-18.0	8	Dual Linear	1.6	SMA-F	50	Al	101.6×101.6×295.8
62EWGN-T02	12.4-18.0	8	Dual Linear	1.6	N-F	150	Al	101.6×101.6×295.8
62EWGT-T02	12.4-18.0	8	Dual Linear	1.6	TNC-F	150	Al	101.6×101.6×295.8
62EWG7-T02	12.4-18.0	8	Dual Linear	1.6	7mm	150	Al	101.6×101.6×295.8
62EWG3.5-T02	12.4-18.0	8	Dual Linear	1.6	3.5mm-F	50	Al	101.6×101.6×295.8
51EWGS-T02	15.0-22.0	8	Dual Linear	1.6	SMA-F	50	Cu	101.6×101.6×289.9
42EWGS-T02	18.0-26.5	8	Dual Linear	1.6	SMA-F	50	Cu	101.6×101.6×280.6
42EWGK-T02	18.0-26.5	8	Dual Linear	1.6	2.92mm-F	20	Cu	101.6×101.6×280.6
42EWG3.5-T02	18.0-26.5	8	Dual Linear	1.6	3.5mm-F	50	Cu	101.6×101.6×280.6
34EWGK-T02	22.0-33.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	101.6×101.6×258.6
28EWGK-T02	26.5-40.0	8	Dual Linear	1.5	2.92mm-F	20	Cu	101.6×101.6×249.7
28EWG2.4-T02	26.5-40.0	8	Dual Linear	1.5	2.4mm-F	10	Cu	101.6×101.6×249.7
28EWGK-T62	23.5-40.0	8	Dual Linear	1.8	2.92mm-F	20	Cu	101.6×101.6×263.7
28EWG2.4-T62	23.5-43.5	8	Dual Linear	1.8	2.4mm-F	10	Cu	101.6×101.6×263.7
28EWGK-T63	23.0-40.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	101.6×101.6×252.3
28EWG2.4-T63	23.0-44.0	8	Dual Linear	2	2.4mm-F	10	Cu	101.6×101.6×252.3
28EWG2.4-T64	22.5-45.0	8	Dual Linear	2	2.4mm-F	10	Cu	101.6×101.6×287
28EWG2.4-T68	24.0-50.0	8	Dual Linear	2	2.4mm-F	10	Cu	101.6×101.6×303.9

Dual Polarization Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
22EWG2.4-T02	33.0-50.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	101.6×101.6×251
19EWG1.85-T02	40.0-60.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	101.6×101.6×255
19EWG2.4-T02	40.0-60.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	101.6×101.6×255
15EWG1.85-T02	50.0-65.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	101.6×101.6×242.2
15EWG1.0-T02	50.0-75.0	9	Dual Linear	2	1.0mm-F	3	Cu	101.6×101.6×242.2
12EWG1.0-T02	60.0-90.0	9	Dual Linear	2	1.0mm-F	3	Cu	101.6×101.6×243.7
10EWG1.0-T02	75.0-110.0	9	Dual Linear	2	1.0mm-F	3	Cu	101.6×101.6×243.6



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Waveguide Probes

4. Dual Pol. Waveguide Probes with Right Angle Coaxial Interface, Equipped with Absorber



Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
284EWGN-T02-A1	2.6-3.95	8	Dual Linear	1.6	N-F	300	Al	-
284EWGS-T02-A1					SMA-F	50		-
284EWG7/16-T02-A1					7/16 DIN-F	500		-
229EWGN-T02-A1	3.3-4.9	8	Dual Linear	1.6	N-F	150	Al	-
229EWGS-T02-A1					SMA-F	50		-
229EWGT-T02-A1					TNC-F	150		-
229EWG7-T02-A1					7mm	150		-
229EWG3.5-T02-A1					3.5mm-F	50		-
187EWGN-T02-A1	3.95-5.85	8	Dual Linear	1.6	N-F	150	Al	-
187EWGS-T02-A1					SMA-F	50		-
187EWGT-T02-A1					TNC-F	150		-
187EWG7-T02-A1					7mm	150		-
187EWG3.5-T02-A1					3.5mm-F	50		-
159EWGN-T02-A1	4.9-7.05	8	Dual Linear	1.6	N-F	150	Al	-
159EWGS-T02-A1					SMA-F	50		-
159EWGT-T02-A1					TNC-F	150		-
159EWG7-T02-A1					7mm	150		-
159EWG3.5-T02-A1					3.5mm-F	50		-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat	Size (mm)
137EWGN-T02-A1	5.85-8.2	8	Dual Linear	1.6	N-F	150	Al	400×400×440.55
137EWGS-T02-A1					SMA-F	50		400×400×440.55
137EWGT-T02-A1					TNC-F	150		400×400×440.55
137EWG7-T02-A1					7mm	150		400×400×440.55
137EWG3.5-T02-A1					3.5mm-F	50		400×400×440.55
112EWGN-T02-A1	7.05-10	8	Dual Linear	1.6	N-F	150	Al	-
112EWGS-T02-A1					SMA-F	50		-
112EWGT-T02-A1					TNC-F	150		-
112EWG7-T02-A1					7mm	150		-
112EWG3.5-T02-A1					3.5mm-F	50		-
90EWGS-T02-A1	8.2-12.4	8	Dual Linear	1.5	SMA-F	50	Al	399.6×399.6×353.9
90EWGN-T02-A1					N-F	150		399.6×399.6×353.9
90EWGT-T02-A1					TNC-F	150		399.6×399.6×353.9
90EWG7-T02-A1					7mm	150		399.6×399.6×353.9
90EWG3.5-T02-A1					3.5mm-F	50		399.6×399.6×353.9
75EWGS-T02-A1	10.0-15.0	8	Dual Linear	1.5	SMA-F	50	Al	399.6×399.6×325.45
75EWGN-T02-A1					N-F	150		399.6×399.6×325.45
75EWGT-T02-A1					TNC-F	150		399.6×399.6×325.45
75EWG7-T02-A1					7mm	150		399.6×399.6×325.45
75EWG3.5-T02-A1					3.5mm-F	50		399.6×399.6×325.45
62EWGS-T02-A1	12.4-18.0	8	Dual Linear	1.6	SMA-F	50	Al	399.6×399.6×295.8
62EWGN-T02-A1					N-F	150		399.6×399.6×295.8
62EWGT-T02-A1					TNC-F	150		399.6×399.6×295.8
62EWG7-T02-A1					7mm	150		399.6×399.6×295.8
62EWG3.5-T02-A1					3.5mm-F	50		399.6×399.6×295.8
51EWGS-T02-A1	15.0-22.0	8	Dual Linear	1.6	SMA-F	50	Cu	399.6×399.6×289.92
42EWGS-T02-A1	18.0-26.5	8	Dual Linear	1.6	SMA-F	50	Cu	399.6×399.6×280.6
42EWGK-T02-A1					2.92mm-F	20		399.6×399.6×280.6
42EWG3.5-T02-A1					3.5mm-F	50		399.6×399.6×280.6
34EWGK-T02-A1	22.0-33.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	399.6×399.6×258.6



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Dual Polarization Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
28EWGK-T02-A1	26.5-40.0	8	Dual Linear	1.5	2.92mm-F	20	Cu	399.6×399.6×249.7
28EWG2.4-T02-A1					2.4mm-F	10		399.6×399.6×249.7
28EWGK-T62-A1	23.5-40.0	8	Dual Linear	1.8	2.92mm-F	20	Cu	399.6×399.6×263.7
28EWG2.4-T62-A1	23.5-43.5	8	Dual Linear	1.8	2.4mm-F	10	Cu	399.6×399.6×263.7
28EWGK-T63-A1	23.0-40.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	399.6×399.6×252.3
28EWG2.4-T63-A1				2	2.4mm-F	10		399.6×399.6×251
28EWG2.4-T64-A1	22.5-45.0	8	Dual Linear	2	2.4mm-F	10	Cu	399.6×399.6×287
28EWG2.4-T68-A1	24.0-50.0	8	Dual Linear	2	2.4mm-F	10	Cu	399.6×399.6×303.9
22EWG2.4-T02-A1	33.0-50.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	399.6×399.6×279
19EWG1.85-T02-A1	40.0-60.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	399.6×399.6×255
19EWG2.4-T02-A1					2.4mm-F	10		399.6×399.6×255
15EWG1.85-T02-A1	50.0-65.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	399.6×399.6×242.2
15EWG1.0-T02-A1	50.0-75.0			2	1.0mm-F	3		399.6×399.6×242.2
12EWG1.0-T02-A1	60.0-90.0	9	Dual Linear	2	1.0mm-F	3	Cu	399.6×399.6×243.7
10EWG1.0-T02-A1	75.0-110.0	9	Dual Linear	2	1.0mm-F	3	Cu	399.6×399.6×243.6

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
284EWGNE-T02	2.6-3.95	8	Dual Linear	1.6	N-F	300	Al	-
284EWGSE-T02				1.6	SMA-F	50		-
229EWGNE-T02	3.3-4.9	8	Dual Linear	1.6	N-F	150	Al	-
229EWGSE-T02				1.6	SMA-F	50		-
187EWGNE-T02	3.95-5.85	8	Dual Linear	1.6	N-F	150	Al	-
187EWGSE-T02				1.6	SMA-F	50		-
159EWGNE-T02	4.9-7.05	8	Dual Linear	1.6	N-F	150	Al	-
159EWGSE-T02				1.6	SMA-F	50		-
137EWGNE-T02	5.85-8.2	8	Dual Linear	1.6	N-F	150	Al	133×101.6×464.6
137EWGSE-T02				1.6	SMA-F	50		133×101.6×450
112EWGNE-T02	7.05-10.0	8	Dual Linear	1.6	N-F	150	Al	-
112EWGSE-T02				1.6	SMA-F	50		-
90EWGSE-T02	8.2-12.4	8	Dual Linear	1.5	SMA-F	50	Al	109.5×101.6×353.9
90EWGNE-T02				1.5	N-F	150		109.5×101.6×353.9
75EWGSE-T02	10.0-15.0	8	Dual Linear	1.5	SMA-F	50	Al	101.6×101.6×325.5
75EWGNE-T02				1.5	N-F	150		101.6×101.6×325.5
62EWGSE-T02	12.4-18.0	8	Dual Linear	1.6	SMA-F	50	Al	101.6×101.6×319.8
62EWGNE-T02				1.6	N-F	150		101.6×101.6×319.75
51EWGSE-T02	15.0-22.0	8	Dual Linear	1.6	SMA-F	50	Cu	101.6×101.6×299.32
42EWGSE-T02	18.0-26.5	8	Dual Linear	1.6	SMA-F	50	Cu	101.6×101.6×279.9
42EWGKE-T02				1.6	2.92mm-F	20		101.6×101.6×280
34EWGKE-T02	22.0-33.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	101.6×101.6×269

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
28EWGKE-T02	26.5-40.0	8	Dual Linear	1.5	2.92mm-F	20	Cu	101.6×101.6×263.8
28EWG2.4E-T02				1.5	2.4mm-F	10		101.6×101.6×260.1
28EWGKE-T62	23.5-40.0	8	Dual Linear	1.8	2.92mm-F	20	Cu	101.6×101.6×272.8
28EWG2.4E-T62	23.5-43.5			1.8	2.4mm-F	10		101.6×101.6×272.8
28EWGKE-T63	23.0-40.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	101.6×101.6×255.7
28EWG2.4E-T63	23.0-44.0			2	2.4mm-F	10		101.6×101.6×263.9
28EWG2.4E-T64	22.5-45.0	8	Dual Linear	2	2.4mm-F	10	Cu	101.6×101.6×299.9
28EWG2.4E-T68	24.0-50.0			2	2.4mm-F	10		101.6×101.6×316
22EWG2.4E-T02	33.0-50.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	101.6×101.6×280.7
19EWG1.85E-T02	40.0-60.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	101.6×101.6×251.7
19EWG2.4E-T02				1.8	2.4mm-F	10		101.6×101.6×252.1
15EWG1.85E-T02	50.0-65.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	101.6×101.6×242.1
15EWG1.0E-T02	50.-75.0			2	1.0mm-F	5		101.6×101.6×208.4
12EWG1.0E-T02	60.0-90.0	9	Dual Linear	2	1.0mm-F	3	Cu	101.6×101.6×238
10EWG1.0E-T02	75.0-110.0	9	Dual Linear	2	1.0mm-F	3	Cu	101.6×101.6×237.9



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Dual Polarization Waveguide Probes

6. Dual Pol. Waveguide Probes with V Port Endlaunch Coaxial Interface, Equipped with Absorber



Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
284EWGNE-T02-A1	2.6-3.95	8	Dual Linear	1.6	N-F	300	Al	-
284EWGSE-T02-A1				1.6	SMA-F	50		-
229EWGNE-T02-A1	3.3-4.9	8	Dual Linear	1.6	N-F	150	Al	-
229EWGSE-T02-A1				1.6	SMA-F	50		-
187EWGNE-T02-A1	3.95-5.85	8	Dual Linear	1.6	N-F	150	Al	-
187EWGSE-T02-A1				1.6	SMA-F	50		-
159EWGNE-T02-A1	4.9-7.05	8	Dual Linear	1.6	N-F	150	Al	-
159EWGSE-T02-A1				1.6	SMA-F	50		-
137EWGNE-T02-A1	5.85-8.2	8	Dual Linear	1.6	N-F	150	Al	400×400×440.55
137EWGSE-T02-A1				1.6	SMA-F	50		400×400×440.55
112EWGNE-T02-A1	7.05-10.0	8	Dual Linear	1.6	N-F	150	Al	-
112EWGSE-T02-A1				1.6	SMA-F	50		-
90EWGSE-T02-A1	8.2-12.4	8	Dual Linear	1.5	SMA-F	50	Al	399.6×399.6×353.9
90EWGNE-T02-A1				1.5	N-F	150		399.6×399.6×353.9
75EWGSE-T02-A1	10.0-15.0	8	Dual Linear	1.6	SMA-F	50	Al	399.6×399.6×334.85
75EWGNE-T02-A1				1.6	N-F	150		399.6×399.6×349.45
62EWGSE-T02-A1	12.4-18.0	8	Dual Linear	1.6	SMA-F	50	Al	399.6×399.6×319.8
62EWGNE-T02-A1				1.6	N-F	150		399.6×399.6×319.8
51EWGSE-T02-A1	15.0-22.0	8	Dual Linear	1.6	SMA-F	50	Cu	399.6×399.6×299.32
42EWGSE-T02-A1	18.0-26.5	8	Dual Linear	1.6	SMA-F	50	Cu	399.6×399.6×279.9
42EWGKE-T02-A1				1.6	2.92mm-F	20		399.6×399.6×280
34EWGKE-T02-A1	22.0-33.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	399.6×399.6×269



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Dual Polarization Waveguide Probes

Model	Freq.(GHz)	Gain Typ.	Pol.	VSWR Typ.	Output	Power Handling, CW, (W)	Mat.	Size (mm)
28EWGKE-T02-A1	26.5-40.0	8	Dual Linear	1.5	2.92mm-F	20	Cu	399.6×399.6×263.8
28EWG2.4E-T02-A1				1.5	2.4mm-F	10		399.6×399.6×260.1
28EWGKE-T62-A1	23.5-40.0	8	Dual Linear	1.8	2.92mm-F	20	Cu	399.6×399.6×272.8
28EWG2.4E-T62-A1	23.5-43.5	8	Dual Linear	1.8	2.4mm-F	10	Cu	399.6×399.6×272.8
28EWGKE-T63-A1	23.0-40.0	8	Dual Linear	1.6	2.92mm-F	20	Cu	399.6×399.6×255.7
28EWG2.4E-T63-A1	23.0-44.0	8	Dual Linear	1.6	2.4mm-F	10	Cu	399.6×399.6×255.7
28EWG2.4E-T64-A1	22.5-45	8	Dual Linear	2	2.4mm-F	10	Cu	399.6×399.6×299.9
28EWG2.4E-T68-A1	24.0-50.0	8	Dual Linear	2	2.4mm-F	10	Cu	399.6×399.6×316
22EWG2.4E-T02-A1	33.0-50.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	399.6×399.6×280.7
19EWG1.85E-T02-A1	40.0-60.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	399.6×399.6×251.7
19EWG2.4E-T02-A1	40.0-60.0	9	Dual Linear	1.8	2.4mm-F	10	Cu	399.6×399.6×252.1
15EWG1.85E-T02-A1	50.0-65.0	9	Dual Linear	1.8	1.85mm-F	5	Cu	399.6×399.6×242.1
15EWG1.0E-T02-A1	50.0-75.0	9	Dual Linear	2	1.0mm-F	5	Cu	399.6×399.6×208.4
12EWG1.0E-T02-A1	60.0-90.0	9	Dual Linear	2	1.0mm-F	3	Cu	399.6×399.6×238
10EWG1.0E-T02-A1	75.0-110.0	9	Dual Linear	2	1.0mm-F	3	Cu	399.6×399.6×237.9



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Conical Horn Antenna

Include the following Types Conical Horn Antennas :

1. Conical Horn with EIA Standard Circular WG Interface (Table 1)
2. Conical Horn with Other Circular WG Interface (Table 2)
3. Conical Horn with Rectangular WG Transition - Linear Polarization (Table 3)
4. Conical Horn with Integrated Rectangular WG Transition - Linear Polarization (Table 4)
5. Conical Horn with Polarizer and Rectangular WG Transition - Circular Polarization (Table 5)
6. Conical Horn with Ortho-Mode Transducer (OMT) - Dual Linear Polarization (Table 6)
7. Conical Horn with Polarizer and Ortho-Mode Transducer (OMT) - Dual Circular Polarization (coming soon)

The LB-CNH series conical horn antennas have four kinds of polarization options: Linear, Circular (RHCP/LHCP), Dual Linear and Dual Circular. And YLB series conical horn antennas are Linear Polarization. A-INFO's conical horn antenna can cover from 5.3GHz to 220GHz frequency range. Those conical horns are precisely fabricated to minimize the tolerance of aperture size and flare angle. These horns are ideally suited for antenna far field testing, RF radiation measurements and other applications.

Model Information

Example Part Number: **LB-CNH** **-90** **-10** **-T06** **-C** **-SF**

Product Code

Waveguide Size: WR137 to WR5
EIA WC Size or Customized Size

Gain in dB, Standard gain is 15dB, 20dB, 25dB

Polarization options, For Circular and Dual Pol. modules.
Leave blank for Linear Polarization modules.

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-

Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male;

1.0F=1.0mm-Female; 1.0M=1.0mm-Male

Calibration Option

Far Field Calibration Data with Extra Fee

Horn Antenna Accessories

1. Mounting Bracket
2. Tripod
3. Radome
4. Carrying Case





pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

1. Conical Horn with EIA Standard Circular WG Interface

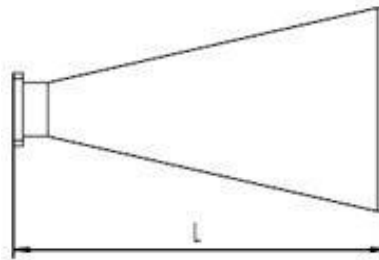

Model	Freq.(GHz)	EIA WC	Gain Typ (dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-WC150-10	5.3-7.27	WC150	10	Linear & Circular	FAP70-M	Al	79.5×79.5×45.7
LB-CNH-WC150-15			15		FAP70-M	Al	101.6×101.6×185.4
LB-CNH-WC150-20			20		FAP70-M	Al	193×193×330.2
LB-CNH-WC128-15	6.21-8.51	WC128	15	Linear & Circular	FBP84-M	Al	83.3×83.3×119.4
LB-CNH-WC128-20			20		FBP84-M	Al	154.4×154.4×274.3
LB-CNH-WC109-15	7.27-9.97	WC109	15	Linear & Circular	FBP84-M	Al	-
LB-CNH-WC109-20			20		FBP84-M	Al	-
LB-CNH-WC109-25			25		FBP84-M	Al	-
LB-CNH-WC94-15	8.49-11.6	WC94	15	Linear & Circular	FBP100-M	Al	-
LB-CNH-WC94-20			20		FBP100-M	Al	-
LB-CNH-WC94-25			25		FBP100-M	Al	-
LB-CNH-WC80-15	9.97-13.7	WC80	15	Linear & Circular	FBP120-M	Al	-
LB-CNH-WC80-20			20		FBP120-M	Al	-
LB-CNH-WC80-25			25		FBP120-M	Al	-
LB-CNH-WC69-15	11.6-15.9	WC69	15	Linear & Circular	FBP140-M	Al	47.8×47.8×74.93
LB-CNH-WC69-20			20		FBP140-M	Al	92.5×92.5×171.45
LB-CNH-WC69-25			25		FBP140-M	Al	178.8×178.8×436.9
LB-CNH-WC59-15	13.4-18.4	WC59	15	Linear & Circular	FBP140-M	Al	-
LB-CNH-WC59-20			20		FBP140-M	Al	-
LB-CNH-WC59-25			25		FBP140-M	Al	-
LB-CNH-WC50-15	15.9-21.8	WC50	15	Linear & Circular	FBP180-M	Al	-
LB-CNH-WC50-20			20		FBP180-M	Al	-
LB-CNH-WC50-25			25		FBP180-M	Al	-
LB-CNH-WC44-15	18.2-24.9	WC44	15	Linear & Circular	UG-595/U-M	Al	-
LB-CNH-WC44-20			20		UG-595/U-M	Al	-
LB-CNH-WC44-25			25		UG-595/U-M	Al	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	EIA WC	Gain Typ (dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-WC38-15	21.2-29.1	WC38	15	Linear & Circular	UG-595/U-M	Al	-
LB-CNH-WC38-20			20		UG-595/U-M	Al	50.3×50.3×96.5
LB-CNH-WC38-25			25		UG-595/U-M	Al	-
LB-CNH-WC33-15	24.3-33.2	WC33	15	Linear & Circular	UG-381/U-M	Al	28.6×28.6×44.5
LB-CNH-WC33-20			20		UG-381/U-M	Al	47.2×47.2×91.44
LB-CNH-WC33-25			25		UG-381/U-M	Al	90.9×90.9×223.5
LB-CNH-WC28-15	28.3-38.8	WC28	15	Linear & Circular	UG-381/U-M	Cu	-
LB-CNH-WC28-20			20		UG-381/U-M	Cu	-
LB-CNH-WC28-25			25		UG-381/U-M	Cu	-
LB-CNH-WC25-15	31.8-43	WC25	15	Linear & Circular	UG-383/U-M	Cu	28.6×28.6×25.4
LB-CNH-WC25-20			20		UG-383/U-M	Cu	34×34×58.42
LB-CNH-WC25-25			25		UG-383/U-M	Al	66×66×165.1
LB-CNH-WC22-15	36.4-49.8	WC22	15	Linear & Circular	UG-383/U-M	Cu	28.6×28.6×25.4
LB-CNH-WC22-20			20		UG-383/U-M	Cu	30.2×30.2×55.9
LB-CNH-WC22-25			25		UG-383/U-M	Al	58.4×58.4×147.3
LB-CNH-WC19-15	42.4-58.1	WC19	15	Linear & Circular	UG-383/U-M	Cu	-
LB-CNH-WC19-20			20		UG-383/U-M	Cu	-
LB-CNH-WC19-25			25		UG-383/U-M	Cu	-
LB-CNH-WC17-15	46.3-63.5	WC17	15	Linear & Circular	UG-385/U-M	Cu	-
LB-CNH-WC17-20			20		UG-385/U-M	Cu	-
LB-CNH-WC17-25			25		UG-385/U-M	Cu	-
LB-CNH-WC14-15	56.6-77.5	WC14	15	Linear & Circular	UG-387/U-M	Cu	19.1×19.1×17.8
LB-CNH-WC14-20			20		UG-387/U-M	Cu	20.6×20.6×40.6
LB-CNH-WC14-25			25		UG-387/U-M	Cu	38.9×38.9×100.3
LB-CNH-WC13-15	63.5-87.2	WC13	15	Linear & Circular	UG-387/U-M	Cu	19.1×19.1×15.2
LB-CNH-WC13-20			20		UG-387/U-M	Cu	19.1×19.1×33
LB-CNH-WC13-25			25		UG-387/U-M	Cu	34×34×86.4
LB-CNH-WC11-15	72.7-99.7	WC11	15	Linear & Circular	UG-387/U-M	Cu	19.1×19.1×15.2
LB-CNH-WC11-20			20		UG-387/U-M	Cu	19.1×19.1×30.5
LB-CNH-WC11-25			25		UG-387/U-M	Cu	30.5×30.5×74.9
LB-CNH-WC9-15	84.8-116	WC9	15	Linear & Circular	UG-387/U-M	Cu	19.1×19.1×14
LB-CNH-WC9-20			20		UG-387/U-M	Cu	19.1×19.1×25.4
LB-CNH-WC9-25			25		UG-387/U-M	Cu	26.9×26.9×69.9





pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

2. Conical Horn with Other Circular WG Interface

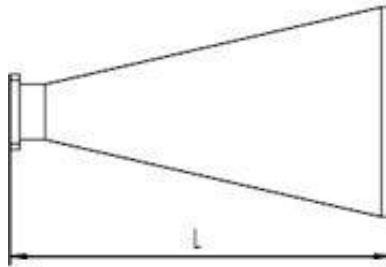

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Figure	Mat.	Size (mm)
LB-CNH-C25-15	8.2-12.4	15	Linear & Circular	FBP100-M	A	Al	66×66×122
LB-CNH-C25-20		20		FBP100-M	A	Al	127×127×231
LB-CNH-C25-25		25		FBP100-M	A	Al	242×242×565
LB-CNH-C21.5-15	10.0-15.0	15	Linear & Circular	FBP120-M	A	Al	55.6×55.6×101.5
LB-CNH-C21.5-20		20		FBP120-M	A	Al	106×106×192.5
LB-CNH-C21.5-25		25		FBP120-M	A	Al	198×198×479.5
LB-CNH-C16.76-15	12.4-14.6	15	Linear & Circular	FBP140-M	A	Al	-
LB-CNH-C16.76-20		20		FBP140-M	A	Al	-
LB-CNH-C16.76-25		25		FBP140-M	A	Al	-
LB-CNH-C13.97-15	14.6-17.5	15	Linear & Circular	FBP180-M	A	Al	39.1×39.1×60.96
LB-CNH-C13.97-20		20		FBP180-M	A	Al	74.7×74.7×140.97
LB-CNH-C13.97-25		25		FBP180-M	A	Al	145.8×145.8×358.1
LB-CNH-C11.94-15	17.5-20.5	15	Linear & Circular	UG-595/U-M	A	Al	33.5×33.5×50.8
LB-CNH-C11.94-20		20		UG-595/U-M	A	Al	62×62×114.3
LB-CNH-C11.94-25		25		UG-595/U-M	A	Al	121.9×121.9×294.64
LB-CNH-C10.06-15	20.5-24.5	15	Linear & Circular	UG-595/U-M	A	Al	28.96×28.96×44.45
LB-CNH-C10.06-20		20		UG-595/U-M	A	Al	53.1×53.1×101.6
LB-CNH-C10.06-25		25		UG-595/U-M	A	Al	105.2×105.2×254
LB-CNH-C8.0-15	26.0-33.0	15	Linear & Circular	UG-381/U-M	A	Cu	28.6×28.6×49.7
LB-CNH-C8.0-20		20		UG-381/U-M	A	Al	47.5×47.5×83.8
LB-CNH-C8.0-25		25		UG-381/U-M	A	Al	79.5×79.5×188
LB-CNH-C4.191-15	50.0-58.0	15	Linear & Circular	UG-383/U-M	A	Cu	19.1×19.1×20.32
LB-CNH-C4.191-20		20		UG-383/U-M	A	Cu	23.62×23.62×45.72
LB-CNH-C4.191-25		25		UG-383/U-M	A	Cu	44.7×44.7×111.76



pradeep@rfconnector.in


9810138894

www.synergyppl.com


Conical Horn Antenna

3. Conical Horn with Rectangular WG Transition - Linear Polarization

A Type, WG Output:

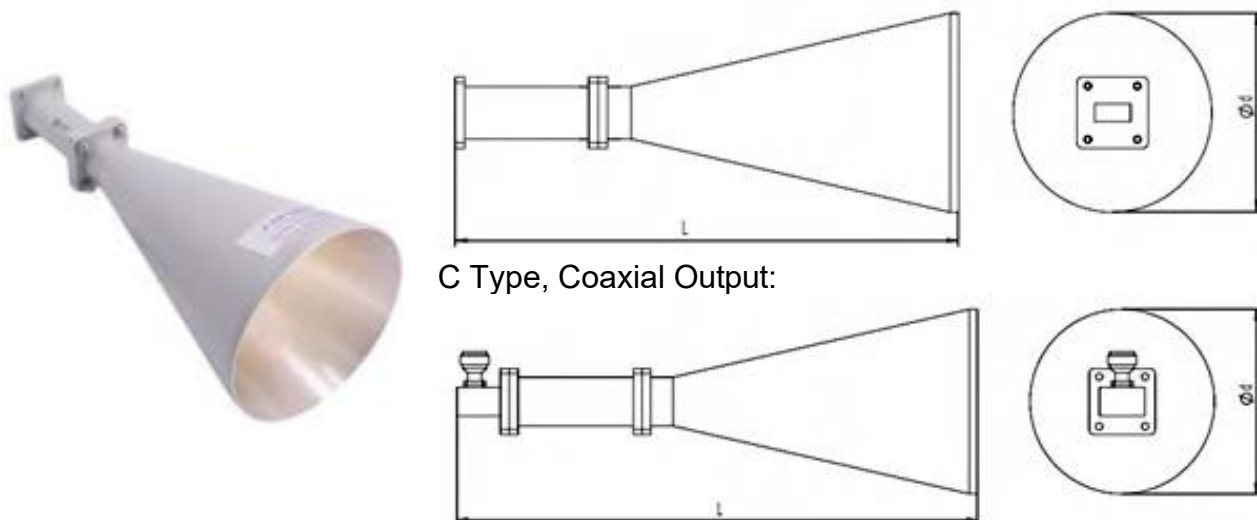

C Type, Coaxial Output:

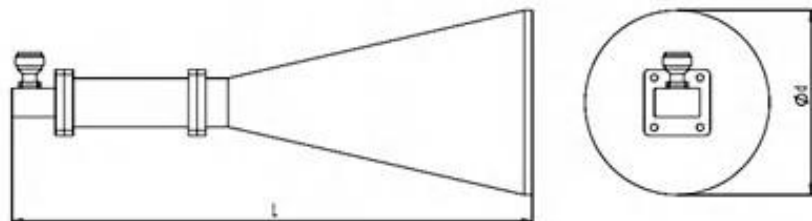

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-137-10-A	5.85-8.2	10	Linear	FDP70	Al	79.5×79.5×198.1
LB-CNH-137-10-C-NF				N-F		79.5×79.5×246.1
LB-CNH-137-10-C-SF				SMA-F		79.5×79.5×246.1
LB-CNH-137-10-C-TF				TNC-F		79.5×79.5×246.1
LB-CNH-137-10-C-7				7mm		79.5×80.4×246.1
LB-CNH-137-10-C-3.5F				3.5mm-F		79.5×79.5×246.1
LB-CNH-137-15-A	5.85-8.2	15	Linear	FDP70	Al	101.6×101.6×337.8
LB-CNH-137-15-C-NF				N-F		101.6×101.6×385.8
LB-CNH-137-15-C-SF				SMA-F		101.6×101.6×385.8
LB-CNH-137-15-C-TF				TNC-F		101.6×101.6×385.8
LB-CNH-137-15-C-7				7mm		101.6×101.6×385.8
LB-CNH-137-15-C-3.5F				3.5mm-F		101.6×101.6×385.8
LB-CNH-137-20-A	5.85-8.2	20	Linear	FDP70	Al	193×193×482.6
LB-CNH-137-20-C-NF				N-F		193×193×530.6
LB-CNH-137-20-C-SF				SMA-F		193×193×530.6
LB-CNH-137-20-C-TF				TNC-F		193×193×530.6
LB-CNH-137-20-C-7				7mm		193×193×530.6
LB-CNH-137-20-C-3.5F				3.5mm-F		193×193×530.6
LB-CNH-112-10-A	7.05-10.0	10	Linear	FBP84	Al	47.8×47.8×163.8
LB-CNH-112-10-C-NF				N-F		47.8×54.2×203.8
LB-CNH-112-10-C-SF				SMA-F		47.8×54.2×203.8
LB-CNH-112-10-C-TF				TNC-F		47.8×54.2×203.8
LB-CNH-112-10-C-7				7mm		47.8×54.2×203.8
LB-CNH-112-10-C-3.5F				3.5mm-F		47.8×54.2×203.8



pradeep@rfconnector.in 9810138894 www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-112-15-A	7.05-10.0	15	Linear	FBP84	Al	83.3×83.3×246.4
LB-CNH-112-15-C-NF				N-F		83.3×83.3×286.4
LB-CNH-112-15-C-SF				SMA-F		83.3×83.3×286.4
LB-CNH-112-15-C-TF				TNC-F		83.3×83.3×286.4
LB-CNH-112-15-C-7				7mm		83.3×83.3×286.4
LB-CNH-112-15-C-3.5F				3.5mm-F		83.3×83.3×286.4
LB-CNH-112-20-A	7.05-10.0	20	Linear	FBP84	Al	154.4×154.4×401.3
LB-CNH-112-20-C-NF				N-F		154.4×154.4×441.3
LB-CNH-112-20-C-SF				SMA-F		154.4×154.4×441.3
LB-CNH-112-20-C-TF				TNC-F		154.4×154.4×441.3
LB-CNH-112-20-C-7				7mm		154.4×154.4×441.3
LB-CNH-112-20-C-3.5F				3.5mm-F		154.4×154.4×441.3
LB-CNH-90-15-A	8.2-12.4	15	Linear	FBP100	Al	66×66×222
LB-CNH-90-15-C-SF				SMA-F		66×66×260
LB-CNH-90-15-C-NF				N-F		66×66×260
LB-CNH-90-15-C-TF				TNC-F		66×66×260
LB-CNH-90-15-C-7				7mm		66×70.8×260
LB-CNH-90-15-C-3.5F				3.5mm-F		66×66×260
LB-CNH-90-20-A	8.2-12.4	20	Linear	FBP100	Al	127×127×331
LB-CNH-90-20-C-SF				SMA-F		127×127×369
LB-CNH-90-20-C-NF				N-F		127×127×369
LB-CNH-90-20-C-TF				TNC-F		127×127×369
LB-CNH-90-20-C-7				7mm		127×127×369
LB-CNH-90-20-C-3.5F				3.5mm-F		127×127×369
LB-CNH-90-25-A	8.2-12.4	25	Linear	FBP100	Al	242×242×665
LB-CNH-90-25-C-SF				SMA-F		242×242×703
LB-CNH-90-25-C-NF				N-F		242×242×703
LB-CNH-90-25-C-TF				TNC-F		242×242×703
LB-CNH-90-25-C-7				7mm		242×242×703
LB-CNH-90-25-C-3.5F				3.5mm-F		242×242×703
LB-CNH-75-15-A	10.0-15.0	15	Linear	FBP120	Al	55.6×55.6×177.7
LB-CNH-75-15-C-SF				SMA-F		55.6×55.6×207.7
LB-CNH-75-15-C-NF				N-F		55.6×56.6×207.7
LB-CNH-75-15-C-TF				TNC-F		55.6×56.4×207.7
LB-CNH-75-15-C-7				7mm		55.6×65.3×207.7
LB-CNH-75-15-C-3.5F				3.5mm-F		55.6×55.6×207.7
LB-CNH-75-20-A	10.0-15.0	20	Linear	FBP120	Al	106×106×268.7
LB-CNH-75-20-C-SF				SMA-F		106×106×298.7
LB-CNH-75-20-C-NF				N-F		106×106×298.7
LB-CNH-75-20-C-TF				TNC-F		106×106×298.7
LB-CNH-75-20-C-7				7mm		106×106×298.7
LB-CNH-75-20-C-3.5F				3.5mm-F		106×106×298.7



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-75-25-A	10.0-15.0	25	Linear	FBP120	Al	198×198×555.7
LB-CNH-75-25-C-SF				SMA-F		198×198×585.7
LB-CNH-75-25-C-NF				N-F		198×198×585.7
LB-CNH-75-25-C-TF				TNC-F		198×198×585.7
LB-CNH-75-25-C-7				7mm		198×198×586.6
LB-CNH-75-25-C-3.5F				3.5mm-F		198×198×585.7
LB-CNH-62-15-A	12.4.0-18.0	15	Linear	FBP140	Al	47.8×47.8×138.43
LB-CNH-62-15-C-SF				SMA-F		47.8×47.8×165.4
LB-CNH-62-15-C-NF				N-F		47.8×51.8×165.4
LB-CNH-62-15-C-TF				TNC-F		47.8×51.7×165.4
LB-CNH-62-15-C-7				7mm		47.8×60.5×165.4
LB-CNH-62-15-C-3.5F				3.5mm-F		47.8×60.5×165.4
LB-CNH-62-20-A	12.4.0-18.0	20	Linear	FBP140	Al	92.5×92.5×234.95
LB-CNH-62-20-C-SF				SMA-F		92.5×92.5×262
LB-CNH-62-20-C-NF				N-F		92.5×92.5×262
LB-CNH-62-20-C-TF				TNC-F		92.5×92.5×262
LB-CNH-62-20-C-7				7mm		92.5×92.5×262
LB-CNH-62-20-C-3.5F				3.5mm-F		92.5×92.5×262
LB-CNH-62-25-A	12.4.0-18.0	25	Linear	FBP140	Al	178.8×178.8×500.4
LB-CNH-62-25-C-SF				SMA-F		178.8×178.8×500.4
LB-CNH-62-25-C-NF				N-F		178.8×178.8×500.4
LB-CNH-62-25-C-TF				TNC-F		178.8×178.8×500.4
LB-CNH-62-25-C-7				7mm		178.8×178.8×500.4
LB-CNH-62-25-C-3.5F				3.5mm-F		178.8×178.8×500.4
LB-CNH-51-15-A	15.0-22.0	15	Linear	FBP180	Al	39.1×39.1×124.5
LB-CNH-51-15-C-SF				SMA-F		39.1×39.1×151.5
LB-CNH-51-20-A	15.0-22.0	20	Linear	FBP180	Al	74.7×74.7×204.5
LB-CNH-51-20-C-SF				SMA-F		74.7×74.7×231.5
LB-CNH-51-25-A	15.0-22.0	25	Linear	FBP180	Al	145.8×145.8×421.6
LB-CNH-51-25-C-SF				SMA-F		145.8×145.8×448.6
LB-CNH-42-15-A	18.0-26.5	15	Linear	FBP220	Al	33.5×33.5×101.6
LB-CNH-42-15-C-SF				SMA-F		33.5×33.5×136.6
LB-CNH-42-15-C-KF				2.92mm (K)-F		33.5×33.5×136.6
LB-CNH-42-15-C-3.5F				3.5mm-F		33.5×33.5×136.6
LB-CNH-42-20-A	18.0-26.5	20	Linear	FBP220	Al	62×62×165.1
LB-CNH-42-20-C-SF				SMA-F		62×62×200.1
LB-CNH-42-20-C-KF				2.92mm (K)-F		62×62×200.1
LB-CNH-42-20-C-3.5F				3.5mm-F		62×62×200.1



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-42-25-A	18.0-26.5	25	Linear	FBP220	Al	121.9×121.9×345.4
LB-CNH-42-25-C-SF				SMA-F		121.9×121.9×380.4
LB-CNH-42-25-C-KF				2.92mm (K)-F		121.9×121.9×380.4
LB-CNH-42-25-C-3.5F				3.5mm-F		121.9×121.9×380.4
LB-CNH-34-15-A	22.0-33.0	15	Linear	FBP260	Al	29×29×95.2
LB-CNH-34-15-C-KF				2.92mm (K)-F		29×31×119.2
LB-CNH-34-20-A	22.0-33.0	20	Linear	FBP260	Al	53.1×53.1×152.4
LB-CNH-34-20-C-KF				2.92mm (K)-F		53.1×53.1×176.4
LB-CNH-34-25-A	22.0-33.0	25	Linear	FBP260	Al	105.2×105.2×304.8
LB-CNH-34-25-C-KF				2.92mm (K)-F		105.2×105.2×328.8
LB-CNH-28-15-A	26.5-40.0	15	Linear	FBP320	Cu	28.6×28.6×87.8
LB-CNH-28-15-C-KF				2.92mm (K)-F		28.6×30.5×111.8
LB-CNH-28-15-C-2.4F				2.4mm-F		28.6×31.4×111.8
LB-CNH-28-20-A	26.5-40.0	20	Linear	FBP320	Al	47.5×47.5×121.9
LB-CNH-28-20-C-KF				2.92mm (K)-F		47.5×47.5×145.9
LB-CNH-28-20-C-2.4F				2.4mm-F		47.5×47.5×145.9
LB-CNH-28-25-A	26.5-40.0	25	Linear	FBP320	Al	79.5×79.5×226.1
LB-CNH-28-25-C-KF				2.92mm (K)-F		79.5×79.5×250.1
LB-CNH-28-25-C-2.4F				2.4mm-F		79.5×79.5×250.1
LB-CNH-22-15-A	33.0-50.0	15	Linear	FUGP400	Cu	28.6×28.6×63.5
LB-CNH-22-15-C-2.4F				2.4mm-F		28.6×31.4×87.5
LB-CNH-22-20-A	33.0-50.0	20	Linear	FUGP400	Cu	34×34×96.52
LB-CNH-22-20-C-2.4F				2.4mm-F		34×34.1×120.52
LB-CNH-22-25-A	33.0-50.0	25	Linear	FUGP400	Al	66×66×203.2
LB-CNH-22-25-C-2.4F				2.4mm-F		66×66×227.2
LB-CNH-19-15-A	40.0-60.0	15	Linear	FUGP500	Cu	28.6×28.6×63.5
LB-CNH-19-15-C-2.4F				2.4mm-F		28.6×31.9×88.5
LB-CNH-19-15-C-1.85F				1.85mm-F		28.6×31.3×89.5
LB-CNH-19-20-A	40.0-60.0	20	Linear	FUGP500	Cu	30.2×30.2×94
LB-CNH-19-20-C-2.4F	40.0-50.0			2.4mm-F		30.2×32.7×119
LB-CNH-19-20-C-1.85F	40.0-60.0			1.85mm-F		30.2×32.1×120
LB-CNH-19-25-A	40.0-60.0	25	Linear	FUGP620	Cu	58.4×58.4×185.4
LB-CNH-19-25-C-2.4F				2.4mm-F		58.4×58.4×210.4
LB-CNH-19-25-C-1.85F				1.85mm-F		58.4×58.4×211.4
LB-CNH-15-15-A	50.0-75.0	15	Linear	FUGP620	Cu	19.1×19.1×48.3
LB-CNH-15-15-C-1.85F				1.85mm-F		19.1×26.7×76.3
LB-CNH-15-15-C-1.0F				1.0mm-F		19.1×24.9×73.7



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	Flange	Mat.	Size (mm)
LB-CNH-15-20-A	50.0-75.0	20	Linear	FUGP620	Cu	23.6×23.6×73.7
LB-CNH-15-20-C-1.85F				1.85mm-F		23.6×29×101.7
LB-CNH-15-20-C-1.0F				1.0mm-F		23.6×27.2×99.1
LB-CNH-15-25-A	50.0-75.0	25	Linear	FUGP620	Cu	44.7×44.7×139.7
LB-CNH-15-25-C-1.85F				1.85mm-F		44.7×44.7×167.7
LB-CNH-15-25-C-1.0F				1.0mm-F		44.7×44.7×165.1
LB-CNH-12-15-A	60.0-90.0	15	Linear	FUGP740	Cu	19.1×19.1×45.72
LB-CNH-12-15-C-1.0F				1.0mm-F		19.1×25×71.1
LB-CNH-12-20-A	60.0-90.0	20	Linear	FUGP740	Cu	20.6×20.6×68.58
LB-CNH-12-20-C-1.0F				1.0mm-F		20.6×25.7×94
LB-CNH-12-25-A	60.0-90.0	25	Linear	FUGP740	Cu	38.9×38.9×128.27
LB-CNH-12-25-C-1.0F				1.0mm-F		38.9×38.9×153.67
LB-CNH-10-15-A	75.0-110.0	15	Linear	FUGP900	Cu	19.1×19.1×43.2
LB-CNH-10-15-C-1.0F				1.0mm-F		19.1×25×68.6
LB-CNH-10-20-A	75.0-110.0	20	Linear	FUGP900	Cu	19.1×19.1×58.4
LB-CNH-10-20-C-1.0F				1.0mm-F		19.1×25×83.8
LB-CNH-10-25-A	75.0-110.0	25	Linear	FUGP900	Cu	30.5×30.5×102.9
LB-CNH-10-25-C-1.0F				1.0mm-F		30.5×30.7×128.3
LB-CNH-8-15-A	90.0-140.0	15	Linear	UG-387/U-M	Cu	19.05×19.05×41.9
LB-CNH-8-20-A		20		UG-387/U-M		19.05×19.05×53.3
LB-CNH-8-25-A		25		UG-387/U-M		26.9×26.9×97.8
LB-CNH-6-15-A	110.0-170.0	15	Linear	UG-387/U-M	Cu	19.05×19.05×37.3
LB-CNH-6-20-A		20		UG-387/U-M		19.05×19.05×46.7
LB-CNH-6-25-A		25		UG-387/U-M		19.9×19.9×76.2
LB-CNH-5-15-A	140.0-220.0	15	Linear	UG-387/U-M	Cu	19.05×19.05×35.9
LB-CNH-5-20-A		20		UG-387/U-M		19.05×19.05×43.8
LB-CNH-5-25-A		25		UG-387/U-M		19.05×19.05×70.4
LB-CNH-4-15-A	170.0-260.0	15	Linear	UG-387/U-M	Cu	19.05×19.05×34.29
LB-CNH-4-20-A		20		UG-387/U-M		19.05×19.05×40.64
LB-CNH-4-25-A		25		UG-387/U-M		19.05×19.05×62.23



pradeep@rfconnector.in


9810138894

www.synergyppl.com


Conical Horn Antenna

4. Conical Horn with Integrated Rectangular WG Transition - Linear Polarization

A Type, WG Output:

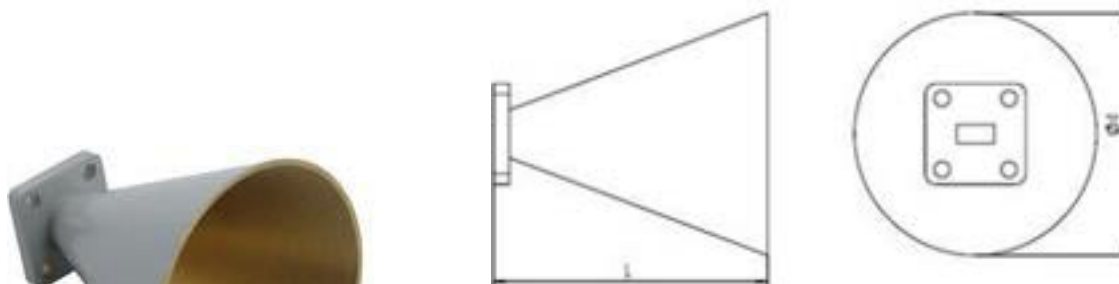

C Type, Coaxial Output:

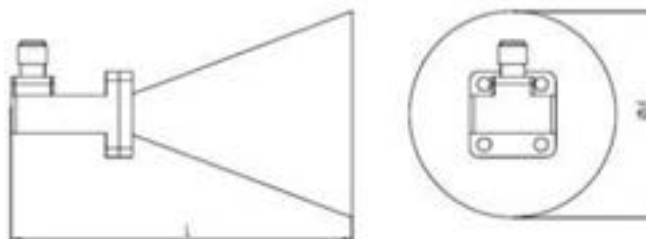

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
YLB-28-20-A	26.5-40.0	20	Linear	FBP320	Cu	A Type	46×46×52
YLB-28-20-C-KF				2.92mm(K)-F		C Type	46×46×76
YLB-28-20-C-2.4F				2.4mm-F		C Type	46×46×76
YLB-15-20-A	50.0-75.0	20	Linear	FUGP620	Cu	A Type	25×25×28
YLB-15-20-C-1.85F	50.0-65.0			1.85mm-F		C Type	25×29.6×56
YLB-15-20-C-1.0F	50.0-75.0			1.0mm-F		C Type	25×27.9×53.4



pradeep@rfconnector.in


9810138894

www.synergyppl.com



Conical Horn Antenna

5. Conical Horn with Polarizer and Rectangular WG Transition - Circular Polarization

A Type, WG Output:

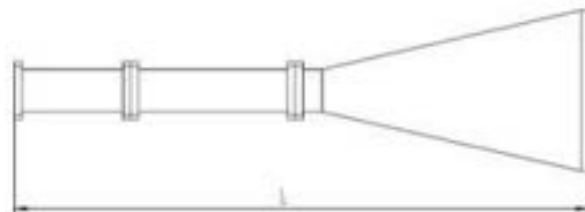

C Type, Coaxial Output:

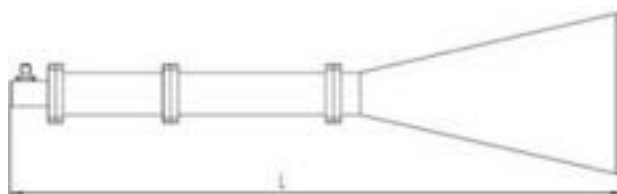

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
LB-CNH-90-15-R16-A	8.9-11.7	15	RHCP	FBP100	Al	A Type	66×66×349
LB-CNH-90-15-R16-C-SF				SMA-F		C Type	66×66×387
LB-CNH-90-15-R16-C-NF				N-F		C Type	66×66×387
LB-CNH-90-15-R16-C-TF				TNC-F		C Type	66×66×387
LB-CNH-90-15-R16-C-7				7mm		C Type	66×70.8×387
LB-CNH-90-15-R16-C-3.5F				3.5mm-F		C Type	66×66×387
LB-CNH-90-15-L16-A	8.9-11.7	15	LHCP	FBP100	Al	A Type	66×66×349
LB-CNH-90-15-L16-C-SF				SMA-F		C Type	66×66×387
LB-CNH-90-15-L16-C-NF				N-F		C Type	66×66×387
LB-CNH-90-15-L16-C-TF				TNC-F		C Type	66×66×387
LB-CNH-90-15-L16-C-7				7mm		C Type	66×70.8×387
LB-CNH-90-15-L16-C-3.5F				3.5mm-F		C Type	66×66×387
LB-CNH-90-20-R16-A	8.9-11.7	20	RHCP	FBP100	Al	A Type	127×127×458
LB-CNH-90-20-R16-C-SF				SMA-F		C Type	127×127×496
LB-CNH-90-20-R16-C-NF				N-F		C Type	127×127×496
LB-CNH-90-20-R16-C-TF				TNC-F		C Type	127×127×496
LB-CNH-90-20-R16-C-7				7mm		C Type	127×127×496
LB-CNH-90-20-R16-C-3.5F				3.5mm-F		C Type	127×127×496
LB-CNH-90-20-L16-A	8.9-11.7	20	LHCP	FBP100	Al	A Type	127×127×458
LB-CNH-90-20-L16-C-SF				SMA-F		C Type	127×127×496
LB-CNH-90-20-L16-C-NF				N-F		C Type	127×127×496
LB-CNH-90-20-L16-C-TF				TNC-F		C Type	127×127×496
LB-CNH-90-20-L16-C-7				7mm		C Type	127×127×496
LB-CNH-90-20-L16-C-3.5F				3.5mm-F		C Type	127×127×496



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
LB-CNH-90-25-R16-A	8.9-11.7	25	RHCP	FBP100	Al	A Type	242×242×792
LB-CNH-90-25-R16-C-SF				SMA-F		C Type	242×242×830
LB-CNH-90-25-R16-C-NF				N-F		C Type	242×242×830
LB-CNH-90-25-R16-C-TF				TNC-F		C Type	242×242×830
LB-CNH-90-25-R16-C-7				7mm		C Type	242×242×830
LB-CNH-90-25-R16-C-3.5F				3.5mm-F		C Type	242×242×830
LB-CNH-90-25-L16-A	8.9-11.7	25	LHCP	FBP100	Al	A Type	242×242×792
LB-CNH-90-25-L16-C-SF				SMA-F		C Type	242×242×830
LB-CNH-90-25-L16-C-NF				N-F		C Type	242×242×830
LB-CNH-90-25-L16-C-TF				TNC-F		C Type	242×242×830
LB-CNH-90-25-L16-C-7				7mm		C Type	242×242×830
LB-CNH-90-25-L16-C-3.5F				3.5mm-F		C Type	242×242×830
LB-CNH-75-15-R16-A	11.0-14.0	15	RHCP	FBP120	Al	A Type	55.6×55.6×285.7
LB-CNH-75-15-R16-C-SF				SMA-F		C Type	55.6×55.6×315.7
LB-CNH-75-15-R16-C-NF				N-F		C Type	56.6×56.6×315.7
LB-CNH-75-15-R16-C-TF				TNC-F		C Type	56.4×56.4×315.7
LB-CNH-75-15-R16-C-7				7mm		C Type	55.6×65.3×316.6
LB-CNH-75-15-R16-C-3.5F				3.5mm-F		C Type	55.6×55.6×315.7
LB-CNH-75-15-L16-A	11.0-14.0	15	LHCP	FBP120	Al	A Type	55.6×55.6×285.7
LB-CNH-75-15-L16-C-SF				SMA-F		C Type	55.6×55.6×315.7
LB-CNH-75-15-L16-C-NF				N-F		C Type	56.6×56.6×315.7
LB-CNH-75-15-L16-C-TF				TNC-F		C Type	56.4×56.4×315.7
LB-CNH-75-15-L16-C-7				7mm		C Type	55.6×65.3×316.6
LB-CNH-75-15-L16-C-3.5F				3.5mm-F		C Type	55.6×55.6×315.7
LB-CNH-75-20-R16-A	11.0-14.0	20	RHCP	FBP120	Al	A Type	106×106×376.7
LB-CNH-75-20-R16-C-SF				SMA-F		C Type	106×106×406.7
LB-CNH-75-20-R16-C-NF				N-F		C Type	106×106×406.7
LB-CNH-75-20-R16-C-TF				TNC-F		C Type	106×106×406.7
LB-CNH-75-20-R16-C-7				7mm		C Type	106×106×407.6
LB-CNH-75-20-R16-C-3.5F				3.5mm-F		C Type	106×106×406.7
LB-CNH-75-20-L16-A	11.0-14.0	20	LHCP	FBP120	Al	A Type	106×106×376.7
LB-CNH-75-20-L16-C-SF				SMA-F		C Type	106×106×406.7
LB-CNH-75-20-L16-C-NF				N-F		C Type	106×106×406.7
LB-CNH-75-20-L16-C-TF				TNC-F		C Type	106×106×406.7
LB-CNH-75-20-L16-C-7				7mm		C Type	106×106×407.6
LB-CNH-75-20-L16-C-3.5F				3.5mm-F		C Type	106×106×406.7



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
LB-CNH-75-25-R16-A	11.0-14.0	25	RHCP	FBP120	Al	A Type	198×198×663.7
LB-CNH-75-25-R16-C-SF				SMA-F		C Type	198×198×693.7
LB-CNH-75-25-R16-C-NF				N-F		C Type	198×198×693.7
LB-CNH-75-25-R16-C-TF				TNC-F		C Type	198×198×693.7
LB-CNH-75-25-R16-C-7				7mm		C Type	198×198×694.6
LB-CNH-75-25-R16-C-3.5F				3.5mm-F		C Type	198×198×693.7
LB-CNH-75-25-L16-A	11.0-14.0	25	LHCP	FBP120	Al	A Type	198×198×663.7
LB-CNH-75-25-L16-C-SF				SMA-F		C Type	198×198×693.7
LB-CNH-75-25-L16-C-NF				N-F		C Type	198×198×693.7
LB-CNH-75-25-L16-C-TF				TNC-F		C Type	198×198×693.7
LB-CNH-75-25-L16-C-7				7mm		C Type	198×198×694.6
LB-CNH-75-25-L16-C-3.5F				3.5mm-F		C Type	198×198×693.7
LB-CNH-22-15-R16a-A	36.0-43.0	15	RHCP	FUGP400	Cu	A Type	28.6×28.6×99.1
LB-CNH-22-15-R16a-C-2.4F				2.4mm-F		C Type	28.6×31.4×123.1
LB-CNH-22-15-L16a-A	36.0-43.0	15	LHCP	FUGP400	Cu	A Type	28.6×28.6×99.1
LB-CNH-22-15-L16a-C-2.4F				2.4mm-F		C Type	28.6×31.4×123.1
LB-CNH-22-20-R16a-A	36.0-43.0	20	RHCP	FUGP400	Cu	A Type	34×34×132.12
LB-CNH-22-20-R16a-C-2.4F				2.4mm-F		C Type	34×34×156.12
LB-CNH-22-20-L16a-A	36.0-43.0	20	LHCP	FUGP400	Cu	A Type	34×34×132.12
LB-CNH-22-20-L16a-C-2.4F				2.4mm-F		C Type	34×34×156.12
LB-CNH-22-25-R16a-A	36.0-43.0	25	RHCP	FUGP400	Al	A Type	66×66×238.8
LB-CNH-22-25-R16a-C-2.4F				2.4mm-F		C Type	66×66×262.8
LB-CNH-22-25-L16a-A	36.0-43.0	25	LHCP	FUGP400	Al	A Type	66×66×238.8
LB-CNH-22-25-L16a-C-2.4F				2.4mm-F		C Type	66×66×262.8
LB-CNH-12WC13-15-R16-A	64.0-86.0	15	RHCP	FUGP740	Cu	A Type	19.1×19.1×71.1
LB-CNH-12WC13-15-R16-C-1.0F				1.0mm-F		C Type	19.1×20.8×96.5
LB-CNH-12WC13-15-L16-A	64.0-86.0	15	LHCP	FUGP740	Cu	A Type	19.1×19.1×71.1
LB-CNH-12WC13-15-L16-C-1.0F				1.0mm-F		C Type	19.1×20.8×96.5
LB-CNH-12WC13-20-R16-A	64.0-86.0	20	RHCP	FUGP740	Cu	A Type	19.1×19.1×88.9
LB-CNH-12WC13-20-R16-C-1.0F				1.0mm-F		C Type	19.1×24.9×114.3
LB-CNH-12WC13-20-L16-A	64.0-86.0	20	LHCP	FUGP740	Cu	A Type	19.1×19.1×88.9
LB-CNH-12WC13-20-L16-C-1.0F				1.0mm-F		C Type	19.1×24.9×114.3
LB-CNH-12WC13-25-R16-A	64.0-86.0	25	RHCP	FUGP740	Cu	A Type	34×34×142.2
LB-CNH-12WC13-25-R16-C-1.0F				1.0mm-F		C Type	34×34×167.6
LB-CNH-12WC13-25-L16-A	64.0-86.0	25	LHCP	FUGP740	Cu	A Type	34×34×142.2
LB-CNH-12WC13-25-L16-C-1.0F				1.0mm-F		C Type	34×34×167.6



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
LB-CNH-10-15-R06-A	75.0-99.0	15	RHCP	FUGP900	Cu	A Type	19.1×19.1×71.1
LB-CNH-10-15-R06-C-1.0F				1.0mm-F		C Type	19.1×25×96.5
LB-CNH-10-15-L06-A	75.0-99.0	15	LHCP	FUGP900	Cu	A Type	19.1×19.1×71.1
LB-CNH-10-15-L06-C-1.0F				1.0mm-F		C Type	19.1×25×96.5
LB-CNH-10-20-R06-A	75.0-99.0	20	RHCP	FUGP900	Cu	A Type	19.1×19.1×86.4
LB-CNH-10-20-R06-C-1.0F				1.0mm-F		C Type	19.1×19.1×111.8
LB-CNH-10-20-L06-A	75.0-99.0	20	LHCP	FUGP900	Cu	A Type	19.1×19.1×86.4
LB-CNH-10-20-L06-C-1.0F				1.0mm-F		C Type	19.1×19.1×111.8
LB-CNH-10-25-R06-A	75.0-99.0	25	RHCP	FUGP900	Cu	A Type	30.5×30.5×130.8
LB-CNH-10-25-R06-C-1.0F				1.0mm-F		C Type	30.5×30.7×156.2
LB-CNH-10-25-L06-A	75.0-99.0	25	LHCP	FUGP900	Cu	A Type	30.5×30.5×130.8
LB-CNH-10-25-L06-C-1.0F				1.0mm-F		C Type	30.5×30.7×156.2
LB-CNH-10-15-R06a-A	74.0-86.0	15	RHCP	FUGP900	Cu	A Type	19.1×19.1×71.1
LB-CNH-10-15-R06a-C-1.0F				1.0mm-F		C Type	19.1×25×96.5
LB-CNH-10-15-L06a-A	74.0-86.0	15	LHCP	FUGP900	Cu	A Type	19.1×19.1×71.1
LB-CNH-10-15-L06a-C-1.0F				1.0mm-F		C Type	19.1×25×96.5
LB-CNH-10-20-R06a-A	74.0-86.0	20	RHCP	FUGP900	Cu	A Type	19.1×19.1×86.4
LB-CNH-10-20-R06a-C-1.0F				1.0mm-F		C Type	19.1×19.1×111.8
LB-CNH-10-20-L06a-A	74.0-86.0	20	LHCP	FUGP900	Cu	A Type	19.1×19.1×86.4
LB-CNH-10-20-L06a-C-1.0F				1.0mm-F		C Type	19.1×19.1×111.8
LB-CNH-10-25-R06a-A	74.0-86.0	25	RHCP	FUGP900	Cu	A Type	30.5×30.5×130.8
LB-CNH-10-25-R06a-C-1.0F				1.0mm-F		C Type	30.5×30.7×156.2
LB-CNH-10-25-L06a-A	74.0-86.0	25	LHCP	FUGP900	Cu	A Type	30.5×30.5×130.8
LB-CNH-10-25-L06a-C-1.0F				1.0mm-F		C Type	30.5×30.7×156.2



pradeep@rfconnector.in



9810138894

www.synergypnl.com



Conical Horn Antenna

6. Conical Horn with Ortho-Mode Transducer (OMT) - Dual Linear Polarization

A Type, WG Output:

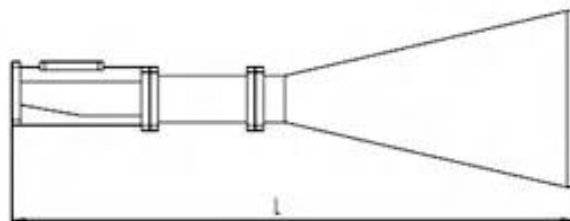

C Type, Coaxial Output:

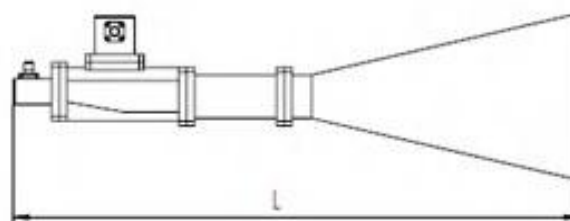

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-137-10-T02-A	5.85-8.2	10	Dual Linear	FDP70	Al	79.5×94×236.2
LB-CNH-137-10-T02-C-NF				N-F		121.9×94×284.2
LB-CNH-137-10-T02-C-SF				SMA-F		121.9×94×284.2
LB-CNH-137-10-T02-C-TF				TNC-F		121.9×94×284.2
LB-CNH-137-10-T02-C-7				7mm		121.9×94×284.2
LB-CNH-137-10-T02-C-3.5F				3.5mm-F		121.9×94×284.2
LB-CNH-137-15-T02-A	5.85-8.2	15	Dual Linear	FDP70	Al	101.3×101.3×375.9
LB-CNH-137-15-T02-C-NF				N-F		132.8×101.3×423.9
LB-CNH-137-15-T02-C-SF				SMA-F		132.8×101.3×423.9
LB-CNH-137-15-T02-C-TF				TNC-F		132.8×101.3×423.9
LB-CNH-137-15-T02-C-7				7mm		132.8×101.3×423.9
LB-CNH-137-15-T02-C-3.5F				3.5mm-F		132.8×101.3×423.9
LB-CNH-137-20-T02-A	5.85-8.2	20	Dual Linear	FDP70	Al	193×193×520.7
LB-CNH-137-20-T02-C-NF				N-F		193×193×568.7
LB-CNH-137-20-T02-C-SF				SMA-F		193×193×568.7
LB-CNH-137-20-T02-C-TF				TNC-F		193×193×568.7
LB-CNH-137-20-T02-C-7				7mm		193×193×568.7
LB-CNH-137-20-T02-C-3.5F				3.5mm-F		193×193×568.7
LB-CNH-112-15-T02-A	7.05-10.0	15	Dual Linear	FBP84	Al	83.3×91.4×265.4
LB-CNH-112-15-T02-C-NF				N-F		105.9×91.4×306.4
LB-CNH-112-15-T02-C-SF				SMA-F		105.9×91.4×306.4
LB-CNH-112-15-T02-C-TF				TNC-F		105.9×91.4×306.4
LB-CNH-112-15-T02-C-7				7mm		105.9×91.4×306.4
LB-CNH-112-15-T02-C-3.5F				3.5mm-F		105.9×91.4×306.4



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-112-20-T02-A	7.05-10.0	20	Dual Linear	FBP84	Al	154.4×154.4×420.4
LB-CNH-112-20-T02-C-NF				N-F		154.4×154.4×460.4
LB-CNH-112-20-T02-C-SF				SMA-F		154.4×154.4×460.4
LB-CNH-112-20-T02-C-TF				TNC-F		154.4×154.4×460.4
LB-CNH-112-20-T02-C-7				7mm		154.4×154.4×460.4
LB-CNH-112-20-T02-C-3.5F				3.5mm-F		154.4×154.4×460.4
LB-CNH-90-15-T02-A	8.2-12.4	15	Dual Linear	FBP100	Al	66×88.9×293.5
LB-CNH-90-15-T02-C-SF				SMA-F		91.7×88.9×331.5
LB-CNH-90-15-T02-C-NF				N-F		91.7×88.9×331.5
LB-CNH-90-15-T02-C-TF				TNC-F		91.7×88.9×331.5
LB-CNH-90-15-T02-C-7				7mm		91.7×88.9×331.5
LB-CNH-90-15-T02-C-3.5F				3.5mm-F		91.7×88.9×331.5
LB-CNH-90-20-T02-A	8.2-12.4	20	Dual Linear	FBP100	Al	127×127×402.5
LB-CNH-90-20-T02-C-SF				SMA-F		127×127×440.5
LB-CNH-90-20-T02-C-NF				N-F		127×127×440.5
LB-CNH-90-20-T02-C-TF				TNC-F		127×127×440.5
LB-CNH-90-20-T02-C-7				7mm		127×127×440.5
LB-CNH-90-20-T02-C-3.5F				3.5mm-F		127×127×440.5
LB-CNH-90-25-T02-A	8.2-12.4	25	Dual Linear	FBP100	Al	242×242×736.5
LB-CNH-90-25-T02-C-SF				SMA-F		242×242×774.5
LB-CNH-90-25-T02-C-NF				N-F		242×242×774.5
LB-CNH-90-25-T02-C-TF				TNC-F		242×242×774.5
LB-CNH-90-25-T02-C-7				7mm		242×242×774.5
LB-CNH-90-25-T02-C-3.5F				3.5mm-F		242×242×774.5
LB-CNH-90-15-T06-A	8.2-10.8	15	Dual Linear	FBP100	Al	66×66×261.7
LB-CNH-90-15-T06-C-SF				SMA-F		66×96.3×299.7
LB-CNH-90-15-T06-C-NF				N-F		66×96.3×299.7
LB-CNH-90-15-T06-C-TF				TNC-F		66×96.3×299.7
LB-CNH-90-15-T06-C-7				7mm		70.8×96.3×299.7
LB-CNH-90-15-T06-C-3.5F				3.5mm-F		66×96.3×299.7
LB-CNH-90-20-T06-A	8.2-10.8	20	Dual Linear	FBP100	Al	127×127×370.7
LB-CNH-90-20-T06-C-SF				SMA-F		127×127×408.7
LB-CNH-90-20-T06-C-NF				N-F		127×127×408.7
LB-CNH-90-20-T06-C-TF				TNC-F		127×127×408.7
LB-CNH-90-20-T06-C-7				7mm		127×127×408.7
LB-CNH-90-20-T06-C-3.5F				3.5mm-F		127×127×408.7



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-90-25-T06-A	8.2-10.8	25	Dual Linear	FBP100	Al	242×242×704.7
LB-CNH-90-25-T06-C-SF				SMA-F		242×242×742.7
LB-CNH-90-25-T06-C-NF				N-F		242×242×742.7
LB-CNH-90-25-T06-C-TF				TNC-F		242×242×742.7
LB-CNH-90-25-T06-C-7				7mm		242×242×742.7
LB-CNH-90-25-T06-C-3.5F				3.5mm-F		242×242×742.7
LB-CNH-90-15-T16-A	8.9-11.7	15	Dual Linear	FBP100	Al	66×66×261.7
LB-CNH-90-15-T16-C-SF				SMA-F		66×95.6×299.7
LB-CNH-90-15-T16-C-NF				N-F		66×95.6×299.7
LB-CNH-90-15-T16-C-TF				TNC-F		66×95.6×299.7
LB-CNH-90-15-T16-C-7				7mm		70.8×95.6×299.7
LB-CNH-90-15-T16-C-3.5F				3.5mm-F		66×95.6×299.7
LB-CNH-90-20-T16-A	8.9-11.7	20	Dual Linear	FBP100	Al	127×127×370.7
LB-CNH-90-20-T16-C-SF				SMA-F		127×127×408.7
LB-CNH-90-20-T16-C-NF				N-F		127×127×408.7
LB-CNH-90-20-T16-C-TF				TNC-F		127×127×408.7
LB-CNH-90-20-T16-C-7				7mm		127×127×408.7
LB-CNH-90-20-T16-C-3.5F				3.5mm-F		127×127×408.7
LB-CNH-90-25-T16-A	8.9-11.7	25	Dual Linear	FBP100	Al	242×242×704.7
LB-CNH-90-25-T16-C-SF				SMA-F		242×242×742.7
LB-CNH-90-25-T16-C-NF				N-F		242×242×742.7
LB-CNH-90-25-T16-C-TF				TNC-F		242×242×742.7
LB-CNH-90-25-T16-C-7				7mm		242×242×742.7
LB-CNH-90-25-T16-C-3.5F				3.5mm-F		242×242×742.7
LB-CNH-90-15-T26-A	9.3-12.4	15	Dual Linear	FBP100	Al	66×66×261.7
LB-CNH-90-15-T26-C-SF				SMA-F		66×95.1×299.7
LB-CNH-90-15-T26-C-NF				N-F		66×95.1×299.7
LB-CNH-90-15-T26-C-TF				TNC-F		66×95.1×299.7
LB-CNH-90-15-T26-C-7				7mm		70.8×95.1×299.7
LB-CNH-90-15-T26-C-3.5F				3.5mm-F		66×95.1×299.7
LB-CNH-90-20-T26-A	9.3-12.4	20	Dual Linear	FBP100	Al	127×127×370.7
LB-CNH-90-20-T26-C-SF				SMA-F		127×127×408.7
LB-CNH-90-20-T26-C-NF				N-F		127×127×408.7
LB-CNH-90-20-T26-C-TF				TNC-F		127×127×408.7
LB-CNH-90-20-T26-C-7				7mm		127×127×408.7
LB-CNH-90-20-T26-C-3.5F				3.5mm-F		127×127×408.7



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-90-25-T26-A	9.3-12.4	25	Dual Linear	FBP100	Al	242×242×704.7
LB-CNH-90-25-T26-C-SF				SMA-F		242×242×742.7
LB-CNH-90-25-T26-C-NF				N-F		242×242×742.7
LB-CNH-90-25-T26-C-TF				TNC-F		242×242×742.7
LB-CNH-90-25-T26-C-7				7mm		242×242×742.7
LB-CNH-90-25-T26-C-3.5F				3.5mm-F		242×242×742.7
LB-CNH-75-15-T02-A	10.0-15.0	15	Dual Linear	FBP120	Al	55.6×76.2×266.6
LB-CNH-75-15-T02-C-SF				SMA-F		76.8×76.2×296.6
LB-CNH-75-15-T02-C-NF				N-F		76.8×76.2×296.6
LB-CNH-75-15-T02-C-TF				TNC-F		76.8×76.2×296.6
LB-CNH-75-15-T02-C-7				7mm		77.7×76.2×297.5
LB-CNH-75-15-T02-C-3.5F				3.5mm-F		76.8×76.2×296.6
LB-CNH-75-20-T02-A	10.0-15.0	20	Dual Linear	FBP120	Al	106×106×357.6
LB-CNH-75-20-T02-C-SF				SMA-F		106×106×387.6
LB-CNH-75-20-T02-C-NF				N-F		106×106×387.6
LB-CNH-75-20-T02-C-TF				TNC-F		106×106×387.6
LB-CNH-75-20-T02-C-7				7mm		106×106×387.6
LB-CNH-75-20-T02-C-3.5F				3.5mm-F		106×106×387.6
LB-CNH-75-25-T02-A	10.0-15.0	25	Dual Linear	FBP120	Al	198×198×644.6
LB-CNH-75-25-T02-C-SF				SMA-F		198×198×674.6
LB-CNH-75-25-T02-C-NF				N-F		198×198×674.6
LB-CNH-75-25-T02-C-TF				TNC-F		198×198×674.6
LB-CNH-75-25-T02-C-7				7mm		198×198×674.6
LB-CNH-75-25-T02-C-3.5F				3.5mm-F		198×198×674.6
LB-CNH-75-15-T06-A	10.0-13.0	15	Dual Linear	FBP120	Al	55.6×55.6×248
LB-CNH-75-15-T06-C-SF				SMA-F		55.6×80×278
LB-CNH-75-15-T06-C-NF				N-F		56.6×80×278
LB-CNH-75-15-T06-C-TF				TNC-F		56.4×80×278
LB-CNH-75-15-T06-C-7				7mm		65.3×80.9×278.9
LB-CNH-75-15-T06-C-3.5F				3.5mm-F		55.6×80×278
LB-CNH-75-20-T06-A	10.0-13.0	20	Dual Linear	FBP120	Al	106×106×339
LB-CNH-75-20-T06-C-SF				SMA-F		106×106×369
LB-CNH-75-20-T06-C-NF				N-F		106×106×369
LB-CNH-75-20-T06-C-TF				TNC-F		106×106×369
LB-CNH-75-20-T06-C-7				7mm		106×106.1×369.9
LB-CNH-75-20-T06-C-3.5F				3.5mm-F		106×106×369



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-75-25-T06-A	10.0-13.0	25	Dual Linear	FBP120	Al	198×198×626
LB-CNH-75-25-T06-C-SF				SMA-F		198×198×656
LB-CNH-75-25-T06-C-NF				N-F		198×198×656
LB-CNH-75-25-T06-C-TF				TNC-F		198×198×656
LB-CNH-75-25-T06-C-7				7mm		198×198×656
LB-CNH-75-25-T06-C-3.5F				3.5mm-F		198×198×656
LB-CNH-75-15-T16-A	11.0-14.0	15	Dual Linear	FBP120	Al	55.6×55.6×248
LB-CNH-75-15-T16-C-SF				SMA-F		55.6×79.5×278
LB-CNH-75-15-T16-C-NF				N-F		56.6×79.5×278
LB-CNH-75-15-T16-C-TF				TNC-F		56.6×79.5×278
LB-CNH-75-15-T16-C-7				7mm		65.3×80.4×278.9
LB-CNH-75-15-T16-C-3.5F				3.5mm-F		55.6×79.5×278
LB-CNH-75-20-T16-A	11.0-14.0	20	Dual Linear	FBP120	Al	106×106×339
LB-CNH-75-20-T16-C-SF				SMA-F		106×106×369
LB-CNH-75-20-T16-C-NF				N-F		106×106×369
LB-CNH-75-20-T16-C-TF				TNC-F		106×106×369
LB-CNH-75-20-T16-C-7				7mm		106×106×369.9
LB-CNH-75-20-T16-C-3.5F				3.5mm-F		106×106×369
LB-CNH-75-25-T16-A	11.0-14.0	25	Dual Linear	FBP120	Al	198×198×626
LB-CNH-75-25-T16-C-SF				SMA-F		198×198×656
LB-CNH-75-25-T16-C-NF				N-F		198×198×656
LB-CNH-75-25-T16-C-TF				TNC-F		198×198×656
LB-CNH-75-25-T16-C-7				7mm		198×198×656
LB-CNH-75-25-T16-C-3.5F				3.5mm-F		198×198×656
LB-CNH-75-15-T26-A	12.0-15.0	15	Dual Linear	FBP120	Al	55.6×55.6×248
LB-CNH-75-15-T26-C-SF				SMA-F		55.6×78.9×278
LB-CNH-75-15-T26-C-NF				N-F		56.6×78.9×278
LB-CNH-75-15-T26-C-TF				TNC-F		56.4×78.9×278
LB-CNH-75-15-T26-C-7				7mm		65.3×79.8×278.9
LB-CNH-75-15-T26-C-3.5F				3.5mm-F		55.6×78.9×278
LB-CNH-75-20-T26-A	12.0-15.0	20	Dual Linear	FBP120	Al	106×106×339
LB-CNH-75-20-T26-C-SF				SMA-F		106×106×369
LB-CNH-75-20-T26-C-NF				N-F		106×106×369
LB-CNH-75-20-T26-C-TF				TNC-F		106×106×369
LB-CNH-75-20-T26-C-7				7mm		106×106×369.9
LB-CNH-75-20-T26-C-3.5F				3.5mm-F		106×106×369



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-75-25-T26-A	12.0-15.0	25	Dual Linear	FBP120	Al	198×198×626
LB-CNH-75-25-T26-C-SF				SMA-F		198×198×656
LB-CNH-75-25-T26-C-NF				N-F		198×198×656
LB-CNH-75-25-T26-C-TF				TNC-F		198×198×656
LB-CNH-75-25-T26-C-7				7mm		198×198×656
LB-CNH-75-25-T26-C-3.5F				3.5mm-F		198×198×656
LB-CNH-62-15-T02-A	12.4-18.0	15	Dual Linear	FBP140	Al	47.8×52.1×189.2
LB-CNH-62-15-T02-C-SF				SMA-F		67.5×52.1×216.2
LB-CNH-62-15-T02-C-NF				N-F		67.5×52.1×216.2
LB-CNH-62-15-T02-C-TF				TNC-F		67.5×52.1×216.2
LB-CNH-62-15-T02-C-7				7mm		67.5×52.1×216.2
LB-CNH-62-15-T02-C-3.5F				3.5mm-F		67.5×52.1×216.2
LB-CNH-62-20-T02-A	12.4-18.0	20	Dual Linear	FBP140	Al	92.5×92.5×285.8
LB-CNH-62-20-T02-C-SF				SMA-F		92.5×92.5×312.8
LB-CNH-62-20-T02-C-NF				N-F		92.5×92.5×312.8
LB-CNH-62-20-T02-C-TF				TNC-F		92.5×92.5×312.8
LB-CNH-62-20-T02-C-7				7mm		92.5×92.5×312.8
LB-CNH-62-20-T02-C-3.5F				3.5mm-F		92.5×92.5×312.8
LB-CNH-62-25-T02-A	12.4-18.0	25	Dual Linear	FBP140	Al	178.8×178.8×551.2
LB-CNH-62-25-T02-C-SF				SMA-F		178.8×178.8×578.2
LB-CNH-62-25-T02-C-NF				N-F		178.8×178.8×578.2
LB-CNH-62-25-T02-C-TF				TNC-F		178.8×178.8×578.2
LB-CNH-62-25-T02-C-7				7mm		178.8×178.8×578.2
LB-CNH-62-25-T02-C-3.5F				3.5mm-F		178.8×178.8×578.2
LB-CNH-51-15-T02-A	15.0-22.0	15	Dual Linear	FBP180	Al	39.1×41.9×158.6
LB-CNH-51-15-T02-C-SF				SMA-F		61.7×41.9×185.6
LB-CNH-51-20-T02-A	15.0-22.0	20	Dual Linear	FBP180	Al	74.7×74.7×238.6
LB-CNH-51-20-T02-C-SF				SMA-F		79.4×74.7×265.6
LB-CNH-51-25-T02-A	15.0-22.0	25	Dual Linear	FBP180	Al	145.8×145.8×445.8
LB-CNH-51-25-T02-C-SF				SMA-F		145.8×145.8×482.8
LB-CNH-42-15-T02-A	18.0-26.5	15	Dual Linear	FBP220	Al	33.5×41.9×114.3
LB-CNH-42-15-T02-C-SF				SMA-F		62.9×41.9×149.3
LB-CNH-42-15-T02-C-KF				2.92mm (K)-F		62.9×41.9×149.3
LB-CNH-42-15-T02-C-3.5F				3.5mm-F		62.9×41.9×149.3



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-42-20-T02-A	18.0-26.5	20	Dual Linear	FBP220	Al	62×62×177.8
LB-CNH-42-20-T02-C-SF				SMA-F		77.2×62×212.8
LB-CNH-42-20-T02-C-KF				2.92mm(K)-F		77.2×62×212.8
LB-CNH-42-20-T02-C-3.5F				3.5mm-F		77.2×62×212.8
LB-CNH-42-25-T02-A	18.0-26.5	25	Dual Linear	FBP220	Al	121.9×121.9×358.1
LB-CNH-42-25-T02-C-SF				SMA-F		121.9×121.9×393.1
LB-CNH-42-25-T02-C-KF				2.92mm(K)-F		121.9×121.9×393.1
LB-CNH-42-25-T02-C-3.5F				3.5mm-F		121.9×121.9×393.1
LB-CNH-34-15-T02-A	22.0-33.0	15	Dual Linear	FBP260	Al	29×38.1×108
LB-CNH-34-15-T02-C-KF				2.92mm(K)-F		49.7×38.1×132
LB-CNH-34-20-T02-A	22.0-33.0	20	Dual Linear	FBP260	Al	53.1×53.1×165.1
LB-CNH-34-20-T02-C-KF				2.92mm(K)-F		61.7×53.1×189.1
LB-CNH-34-25-T02-A	22.0-33.0	25	Dual Linear	FBP260	Al	105.2×105.2×317.5
LB-CNH-34-25-T02-C-KF				2.92mm(K)-F		105.2×105.2×341.5
LB-CNH-34-15-T06-A	22.0-29.0	15	Dual Linear	FBP260	Al	29×29×114.3
LB-CNH-34-15-T06-C-KF				2.92mm(K)-F		31×52.8×138.3
LB-CNH-34-20-T06-A	22.0-29.0	20	Dual Linear	FBP260	Al	53.1×53.1×171.5
LB-CNH-34-20-T06-C-KF				2.92mm(K)-F		53.1×64.8×195.5
LB-CNH-34-25-T06-A	22.0-29.0	25	Dual Linear	FBP260	Al	105.2×105.2×323.9
LB-CNH-34-25-T06-C-KF				2.92mm(K)-F		105.2×105.2×347.9
LB-CNH-34-15-T16-A	23.8-31.2	15	Dual Linear	FBP260	Al	29×29×114.3
LB-CNH-34-15-T16-C-KF				2.92mm(K)-F		31×52.8×138.3
LB-CNH-34-20-T16-A	23.8-31.2	20	Dual Linear	FBP260	Al	53.1×53.1×171.5
LB-CNH-34-20-T16-C-KF				2.92mm(K)-F		53.1×64.8×195.5
LB-CNH-34-25-T16-A	23.8-31.2	25	Dual Linear	FBP260	Al	105.2×105.2×323.9
LB-CNH-34-25-T16-C-KF				2.92mm(K)-F		105.2×105.2×347.9
LB-CNH-34-15-T26-A	25.0-33.0	15	Dual Linear	FBP260	Al	29×29×114.3
LB-CNH-34-15-T26-C-KF				2.92mm(K)-F		31×52.8×138.3
LB-CNH-34-20-T26-A	25.0-33.0	20	Dual Linear	FBP260	Al	53.1×53.1×171.5
LB-CNH-34-20-T26-C-KF				2.92mm(K)-F		53.1×64.8×195.5
LB-CNH-34-25-T26-A	25.0-33.0	25	Dual Linear	FBP260	Al	105.2×105.2×323.9
LB-CNH-34-25-T26-C-KF				2.92mm(K)-F		105.2×105.2×347.9
LB-CNH-28-15-T02-A	26.5-40.0	15	Dual Linear	FBP320	Cu	28.6×38.1×104.3
LB-CNH-28-15-T02-C-KF				2.92mm(K)-F		52.6×38.1×128.3
LB-CNH-28-15-T02-C-2.4F				2.4mm-F		52.6×38.1×128.3



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-28-20-T02-A	26.5-40.0	20	Dual Linear	FBP320	Al	47.5×47.5×144.8
LB-CNH-28-20-T02-C-KF				2.92mm(K)-F		47.5×62.1×168.8
LB-CNH-28-20-T02-C-2.4F				2.4mm-F		47.5×62.1×168.8
LB-CNH-28-25-T02-A	26.5-40.0	25	Dual Linear	FBP320	Al	79.5×79.5×249
LB-CNH-28-25-T02-C-KF				2.92mm(K)-F		79.5×79.5×273
LB-CNH-28-25-T02-C-2.4F				2.4mm-F		79.5×79.5×273
LB-CNH-28-15-T06-A	30.0-40.0	15	Dual Linear	FBP320	Cu	28.6×28.6×106.8
LB-CNH-28-15-T06-C-KF				2.92mm(K)-F		30.5×52.6×130.8
LB-CNH-28-15-T06-C-2.4F				2.4mm-F		31.4×52.6×130.8
LB-CNH-28-20-T06-A	30.0-40.0	20	Dual Linear	FBP320	Al	47.5×47.5×140.9
LB-CNH-28-20-T06-C-KF				2.92mm(K)-F		47.5×62.1×164.9
LB-CNH-28-20-T06-C-2.4F				2.4mm-F		47.5×62.1×164.9
LB-CNH-28-25-T06-A	30.0-40.0	25	Dual Linear	FBP320	Al	79.5×79.5×245.05
LB-CNH-28-25-T06-C-KF				2.92mm(K)-F		79.5×79.5×269.1
LB-CNH-28-25-T06-C-2.4F				2.4mm-F		79.5×79.5×269.1
LB-CNH-28-15-T16-A	28.5-38.0	15	Dual Linear	FBP320	Cu	28.6×28.6×106.8
LB-CNH-28-15-T16-C-KF				2.92mm(K)-F		30.5×52.6×130.8
LB-CNH-28-15-T16-C-2.4F				2.4mm-F		31.4×52.6×130.8
LB-CNH-28-20-T16-A	28.5-38.0	20	Dual Linear	FBP320	Al	47.5×47.5×140.9
LB-CNH-28-20-T16-C-KF				2.92mm(K)-F		47.5×62.1×164.9
LB-CNH-28-20-T16-C-2.4F				2.4mm-F		47.5×62.1×164.9
LB-CNH-28-25-T16-A	28.5-38.0	25	Dual Linear	FBP320	Al	79.5×79.5×245.1
LB-CNH-28-25-T16-C-KF				2.92mm(K)-F		79.5×79.5×269.1
LB-CNH-28-25-T16-C-2.4F				2.4mm-F		79.5×79.5×269.1
LB-CNH-28-15-T26-A	26.0-35.0	15	Dual Linear	FBP320	Cu	28.6×28.6×108.75
LB-CNH-28-15-T26-C-KF				2.92mm(K)-F		30.5×52.6×132.8
LB-CNH-28-15-T26-C-2.4F				2.4mm-F		31.4×52.6×132.8
LB-CNH-28-20-T26-A	26.0-35.0	20	Dual Linear	FBP320	Al	47.5×47.5×142.9
LB-CNH-28-20-T26-C-KF				2.92mm(K)-F		47.5×62.1×166.9
LB-CNH-28-20-T26-C-2.4F				2.4mm-F		47.5×62.1×166.9
LB-CNH-28-25-T26-A	26.0-35.0	25	Dual Linear	FBP320	Al	79.5×79.5×247.05
LB-CNH-28-25-T26-C-KF				2.92mm(K)-F		79.5×79.5×271.1
LB-CNH-28-25-T26-C-2.4F				2.4mm-F		79.5×79.5×271.1
LB-CNH-28-15-T68-A	24.0-50.0	15	Dual Linear	FBP320	Cu	28.6×38.1×165.5
LB-CNH-28-15-T68-C-2.4F				2.4mm-F		38.1×52.2×188.9
LB-CNH-28-20-T68-A	24.0-50.0	20	Dual Linear	FBP320	Al	47.5×47.5×199.4
LB-CNH-28-20-T68-C-2.4F				2.4mm-F		47.5×61.7×223



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-28-25-T68-A	24.0-50.0	25	Dual Linear	FBP320	Al	79.5×79.5×303.6
LB-CNH-28-25-T68-C-2.4F				2.4mm-F		79.5×79.5×327.6
LB-CNH-28-15-T64-A	24.0-43.0	15	Dual Linear	FBP320	Cu	-
LB-CNH-28-15-T64-C-2.4F				2.4mm-F		-
LB-CNH-28-20-T64-A	22.5-45.0	20	Dual Linear	FBP320	Al	50.3×50.3×213.8
LB-CNH-28-20-T64-C-2.4F				2.4mm-F		62.3×50.3×236.6
LB-CNH-28-25-T64-A	24.0-43.0	25	Dual Linear	FBP320	Al	-
LB-CNH-28-25-T64-C-2.4F				2.4mm-F		-
LB-CNH-28-15-T62-A	23.5-43.5	15	Dual Linear	FBP320	Al	28.6×38.1×120.7
LB-CNH-28-15-T62-C-KF	23.5-40.0			2.92mm(K)-F		52.6×38.1×144.7
LB-CNH-28-15-T62-C-2.4F	23.5-43.5			2.4mm-F		52.6×38.1×144.7
LB-CNH-28-20-T62-A	23.5-43.5	20	Dual Linear	FBP320	Al	47.2×47.2×167.6
LB-CNH-28-20-T62-C-KF	23.5-40.0			2.92mm(K)-F		60.8×47.2×190.5
LB-CNH-28-20-T62-C-2.4F	23.5-43.5			2.4mm-F		60.8×47.2×190.5
LB-CNH-28-25-T62-A	23.5-43.5	25	Dual Linear	FBP320	Al	90.9×90.9×300.6
LB-CNH-28-25-T62-C-KF	23.5-40.0			2.92mm(K)-F		90.9×90.9×322.6
LB-CNH-28-25-T62-C-2.4F	23.5-43.5			2.4mm-F		90.9×90.9×322.6
LB-CNH-28-15-T63-A	23.0-44.0	15	Dual Linear	FBP320	Al	28.6×31.8×108
LB-CNH-28-15-T63-C-KF	23.0-40.0			2.92mm(K)-F		51.4×32.6×130.8
LB-CNH-28-15-T63-C-2.4F	23.0-44.0			2.4mm-F		51.4×32.6×130.8
LB-CNH-28-20-T63-A	23.0-44.0	20	Dual Linear	FBP320	Al	47.2×47.2×154.9
LB-CNH-28-20-T63-C-KF	23.0-40.0			2.92mm(K)-F		51.4×46.2×177.8
LB-CNH-28-20-T63-C-2.4F	23.0-44.0			2.4mm-F		51.4×46.2×177.8
LB-CNH-28-25-T63-A	23.0-44.0	25	Dual Linear	FBP320	Al	90.9×90.9×287
LB-CNH-28-25-T63-C-KF	23.0-40.0			2.92mm(K)-F		90.9×90.9×309.9
LB-CNH-28-25-T63-C-2.4F	23.0-44.0			2.4mm-F		90.9×90.9×309.9
LB-CNH-28WC33-15-T63-A	23.0-44.0	15	Dual Linear	FBP320	Al	28.6×31.8×108
LB-CNH-28WC33-15-T63-C-2.4F				2.4mm-F		28.6×55.8×132
LB-CNH-28WC33-20-T63-A	23.0-44.0	20	Dual Linear	FBP320	Al	47.2×47.2×154.9
LB-CNH-28WC33-20-T63-C-2.4F				2.4mm-F		55.8×47.2×178.9
LB-CNH-28WC33-25-T63-A	23.0-44.0	25	Dual Linear	FBP320	Al	90.9×90.9×287
LB-CNH-28WC33-25-T63-C-2.4F				2.4mm-F		90.9×90.9×311
LB-CNH-22-15-T02-A	33.0-50.0	15	Dual Linear	FUGP400	Cu	30.5×30.5×81.3
LB-CNH-22-15-T02-C-2.4F				2.4mm-F		32.4×49.5×105.3
LB-CNH-22-20-T02-A	33.0-50.0	20	Dual Linear	FUGP400	Cu	34×34×114.3
LB-CNH-22-20-T02-C-2.4F				2.4mm-F		34×51.3×138.3
LB-CNH-22-25-T02-A	33.0-50.0	25	Dual Linear	FUGP400	Al	66×66×221
LB-CNH-22-25-T02-C-2.4F				2.4mm-F		66×67.3×245



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Size (mm)
LB-CNH-19-15-T02-A	40.0-60.0	15	Dual Linear	FUGP500	Cu	30.5×30.5×81.3
LB-CNH-19-15-T02-C-2.4F	40.0-50.0			2.4mm-F		50.5×32.8×106.3
LB-CNH-19-15-T02-C-1.85F	40.0-60.0			1.85mm-F		51.5×32.3×107.3
LB-CNH-19-20-T02-A	40.0-60.0	20	Dual Linear	FUGP500	Cu	30.5×30.5×111.8
LB-CNH-19-20-T02-C-2.4F	40.0-50.0			2.4mm-F		50.5×32.8×137.8
LB-CNH-19-20-T02-C-1.85F	40.0-60.0			1.85mm-F		51.5×32.3×136.8
LB-CNH-19-25-T02-A	40.0-60.0	25	Dual Linear	FUGP500	Al	58.4×58.4×203.2
LB-CNH-19-25-T02-C-2.4F	40.0-50.0			2.4mm-F		64.5×58.4×228.2
LB-CNH-19-25-T02-C-1.85F	40.0-60.0			1.85mm-F		65.5×58.4×229.2
LB-CNH-15-15-T02-A	50.0-75.0	15	Dual Linear	FUGP620	Cu	20.3×20.3×84.8
LB-CNH-15-15-T02-C-1.85F	50.0-65.0			1.85mm-F		27.3×47×112.8
LB-CNH-15-15-T02-C-1.0F	50.0-75.0			1.0mm-F		27.3×47×112.8
LB-CNH-15-20-T02-A	50.0-75.0	20	Dual Linear	FUGP620	Cu	23.6×23.6×110.2
LB-CNH-15-20-T02-C-1.85F	50.0-65.0			1.85mm-F		27.3×46.6×138.2
LB-CNH-15-20-T02-C-1.0F	50.0-75.0			1.0mm-F		27.3×46.6×138.2
LB-CNH-15-25-T02-A	50.0-75.0	25	Dual Linear	FUGP620	Cu	44.7×44.7×150.88
LB-CNH-15-25-T02-C-1.85F	50.0-65.0			1.85mm-F		44.7×59.2×178.9
LB-CNH-15-25-T02-C-1.0F	50.0-75.0			1.0mm-F		44.7×59.2×178.9
LB-CNH-12-15-T02-A	60.0-90.0	15	Dual Linear	FUGP740	Cu	20.3×20.3×87.6
LB-CNH-12-15-T02-C-1.0F	60.0-90.0			1.0mm-F		44.6×25.6×113
LB-CNH-12-20-T02-A	60.0-90.0	20	Dual Linear	FUGP740	Cu	20.6×20.6×110.5
LB-CNH-12-20-T02-C-1.0F	60.0-90.0			1.0mm-F		44.6×25.6×135.9
LB-CNH-12-25-T02-A	60.0-90.0	25	Dual Linear	FUGP740	Cu	38.9×38.9×170.2
LB-CNH-12-25-T02-C-1.0F	60.0-90.0			1.0mm-F		53.6×38.9×195.6
LB-CNH-8-15-T02-A	90.0-140.0	15	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-8-20-T02-A	90.0-140.0	20	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-8-25-T02-A	90.0-140.0	25	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-6-15-T02-A	110.0-170.0	15	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-6-20-T02-A	110.0-170.0	20	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-6-25-T02-A	110.0-170.0	25	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-5-15-T02-A	140.0-220.0	15	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-5-20-T02-A	140.0-220.0	20	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-5-25-T02-A	140.0-220.0	25	Dual Linear	UG-387/U-M	Cu	-
LB-CNH-4-15-T02-A	170.0-260.0	15	Dual Linear	UG-387/U-M	Cu	20.3 x 20.3 x 42.2
LB-CNH-4-20-T02-A	170.0-260.0	20	Dual Linear	UG-387/U-M	Cu	20.3 x 20.3 x 48.5
LB-CNH-4-25-T02-A	170.0-260.0	25	Dual Linear	UG-387/U-M	Cu	20.3 x 20.3 x 70.1



pradeep@rfconnector.in


9810138894

www.synergyppl.com


Conical Horn Antenna

7. Conical Horn with Polarizer and Ortho-Mode Transducer (OMT) - Dual Circular Polarization

A Type, WG Output:

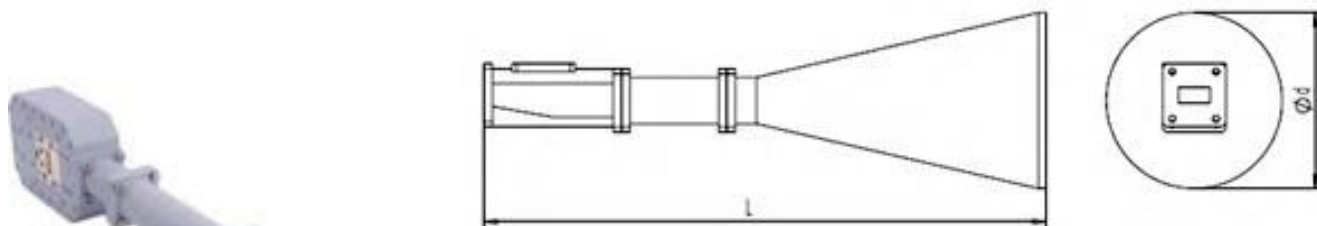

C Type, Coaxial Output:

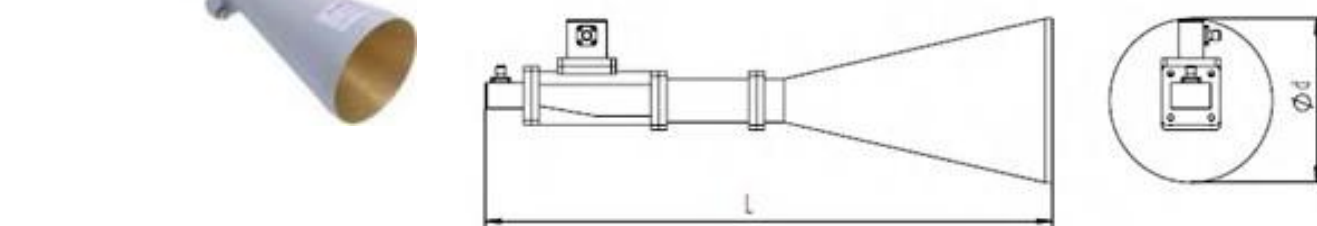

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat	Figure	Size (mm)
LB-CNH-90-15-D02-A	8.2-12.4	15	Dual Circular	FBP100	Al	A Type	66×88.9×420.5
LB-CNH-90-15-D02-C-SF				SMA-F		C Type	91.7×88.9×458.5
LB-CNH-90-15-D02-C-NF				N-F		C Type	91.7×88.9×458.5
LB-CNH-90-15-D02-C-TF				TNC-F		C Type	91.7×88.9×458.5
LB-CNH-90-15-D02-C-7				7mm		C Type	91.7×88.9×458.5
LB-CNH-90-15-D02-C-3.5F				3.5mm-F		C Type	91.7×88.9×458.5
LB-CNH-90-20-D02-A	8.2-12.4	20	Dual Circular	FBP100	Al	A Type	127×127×529.5
LB-CNH-90-20-D02-C-SF				SMA-F		C Type	127×127×567.5
LB-CNH-90-20-D02-C-NF				N-F		C Type	127×127×567.5
LB-CNH-90-20-D02-C-TF				TNC-F		C Type	127×127×567.5
LB-CNH-90-20-D02-C-7				7mm		C Type	127×127×567.5
LB-CNH-90-20-D02-C-3.5F				3.5mm-F		C Type	127×127×567.5
LB-CNH-90-25-D02-A	8.2-12.4	25	Dual Circular	FBP100	Al	A Type	242×242×863.5
LB-CNH-90-25-D02-C-SF				SMA-F		C Type	242×242×901.5
LB-CNH-90-25-D02-C-NF				N-F		C Type	242×242×901.5
LB-CNH-90-25-D02-C-TF				TNC-F		C Type	242×242×901.5
LB-CNH-90-25-D02-C-7				7mm		C Type	242×242×901.5
LB-CNH-90-25-D02-C-3.5F				3.5mm-F		C Type	242×242×901.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat	Figure	Size (mm)
LB-CNH-28-15-D02-A	26.5-40.0	15	Dual Circular	FBP320	Cu	A Type	28.6×28.6×167.8
LB-CNH-28-15-D02-C-KF				2.92mm (K)-F		C Type	52.6×30.5×191.8
LB-CNH-28-15-D02-C-2.4F				2.4mm-F		C Type	52.6×30.5×191.8
LB-CNH-28-20-D02-A	26.5-40.0	20	Dual Circular	FBP320	Al	A Type	47.5×47.5×201.9
LB-CNH-28-20-D02-C-KF				2.92mm (K)- F		C Type	62.1×47.5×225.9
LB-CNH-28-20-D02-C-2.4F				2.4mm-F		C Type	62.1×47.5×225.9
LB-CNH-28-25-D02-A	26.5-40.0	25	Dual Circular	FBP320	Al	A Type	79.5×79.5×306.1
LB-CNH-28-25-D02-C-KF				2.92mm (K)- F		C Type	79.5×79.5×330.1
LB-CNH-28-25-D02-C-2.4F				2.4mm-F		C Type	79.5×79.5×250.1



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Conical Horn Antenna

Model	Freq.(GHz)	Gain Typ(dBi)	Pol.	output	Mat.	Figure	Size (mm)
LB-CNH-90-15-D16-A	8.9-11.7	15	Dual Circular	FBP100	Al	A Type	66×66×388.7
LB-CNH-90-15-D16-C-SF				SMA-F		C Type	66×95.6×426.7
LB-CNH-90-15-D16-C-NF				N-F		C Type	66×95.6×426.7
LB-CNH-90-15-D16-C-TF				TNC-F		C Type	66×95.6×426.7
LB-CNH-90-15-D16-C-7				7mm		C Type	70.8×95.6×426.7
LB-CNH-90-15-D16-C-3.5F				3.5mm-F		C Type	66×95.6×426.7
LB-CNH-90-20-D16-A	8.9-11.7	20	Dual Circular	FBP100	Al	A Type	127×127×370.7
LB-CNH-90-20-D16-C-SF				SMA-F		C Type	127×127×535.7
LB-CNH-90-20-D16-C-NF				N-F		C Type	127×127×535.7
LB-CNH-90-20-D16-C-TF				TNC-F		C Type	127×127×535.7
LB-CNH-90-20-D16-C-7				7mm		C Type	127×127×535.7
LB-CNH-90-20-D16-C-3.5F				3.5mm-F		C Type	127×127×535.7
LB-CNH-90-25-D16-A	8.9-11.7	25	Dual Circular	FBP100	Al	A Type	242×242×831.7
LB-CNH-90-25-D16-C-SF				SMA-F		C Type	242×242×837.1
LB-CNH-90-25-D16-C-NF				N-F		C Type	242×242×837.1
LB-CNH-90-25-D16-C-TF				TNC-F		C Type	242×242×837.1
LB-CNH-90-25-D16-C-7				7mm		C Type	242×242×837.1
LB-CNH-90-25-D16-C-3.5F				3.5mm-F		C Type	242×242×837.1
LB-CNH-75-15-D16-A	11.0-14.0	15	Dual Circular	FBP120	Al	A Type	55.6×55.6×356
LB-CNH-75-15-D16-C-SF				SMA-F		C Type	55.6×79.5×386
LB-CNH-75-15-D16-C-NF				N-F		C Type	56.6×79.5×386
LB-CNH-75-15-D16-C-TF				TNC-F		C Type	56.6×79.5×386
LB-CNH-75-15-D16-C-7				7mm		C Type	65.3×80.4×386.9
LB-CNH-75-15-D16-C-3.5F				3.5mm-F		C Type	55.6×79.5×386
LB-CNH-75-20-D16-A	11.0-14.0	20	Dual Circular	FBP120	Al	A Type	106×106×447
LB-CNH-75-20-D16-C-SF				SMA-F		C Type	106×106×477
LB-CNH-75-20-D16-C-NF				N-F		C Type	106×106×477
LB-CNH-75-20-D16-C-TF				TNC-F		C Type	106×106×477
LB-CNH-75-20-D16-C-7				7mm		C Type	106×106×477
LB-CNH-75-20-D16-C-3.5F				3.5mm-F		C Type	106×106×477
LB-CNH-75-25-D16-A	11.0-14.0	25	Dual Circular	FBP120	Al	A Type	198×198×734
LB-CNH-75-25-D16-C-SF				SMA-F		C Type	198×198×764
LB-CNH-75-25-D16-C-NF				N-F		C Type	198×198×764
LB-CNH-75-25-D16-C-TF				TNC-F		C Type	198×198×764
LB-CNH-75-25-D16-C-7				7mm		C Type	198×198×764
LB-CNH-75-25-D16-C-3.5F				3.5mm-F		C Type	198×198×764



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Corrugated Conical Horn Antenna



Model Information

Example Part Number: **LB-CH** -90 -10 -T06 -C -SF

Product Code

Waveguide Size: WR159 to WR5

EIA WC Size or Customized Size

Gain in dB, Standard gain is 15dB, 20dB, 25dB

Polarization options, For Circular and Dual Pol. modules.

Leave blank for Linear Polarization modules.

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-

Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male;

1.0F=1.0mm-Female; 1.0M=1.0mm-Male



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-159-15-A	4.9-7.05	WR159	15	Linear	1.25	FDP58	184.3 x 184.3 x 310.3
LB-CH-159-15-C-SF					1.4	SMA-F	184.3 x 184.3 x 360.3
LB-CH-159-15-C-NF					1.4	N-F	184.3 x 184.3 x 360.3
LB-CH-159-15-C-TF					1.4	TNC-F	184.3 x 184.3 x 360.3
LB-CH-159-15-C-7					1.4	7mm	184.3 x 184.3 x 360.3
LB-CH-159-15-C-3.5F					1.4	3.5mm-F	184.3 x 184.3 x 360.3
LB-CH-159-15-T02-A	4.9-7.05	WR159	15	Dual Linear	1.5	FDP58	184.3 x 184.3 x 370.7
LB-CH-159-15-T02-C-SF					1.6	SMA-F	184.3 x 184.3 x 420.7
LB-CH-159-15-T02-C-NF					1.6	N-F	184.3 x 184.3 x 420.7
LB-CH-159-15-T02-C-TF					1.6	TNC-F	184.3 x 184.3 x 420.7
LB-CH-159-15-T02-C-7					1.6	7mm	184.3 x 184.3 x 420.7
LB-CH-159-15-T02-C-3.5F					1.6	3.5mm-F	184.3 x 184.3 x 420.7
LB-CH-159-15-T06-A	4.9-6.4	WR159	15	Dual Linear	1.4	FDP58	184.3 x 184.3 x 383.4
LB-CH-159-15-T06-C-SF					1.5	SMA-F	184.3 x 194 x 433.4
LB-CH-159-15-T06-C-NF					1.5	N-F	184.3 x 194 x 433.4
LB-CH-159-15-T06-C-TF					1.5	TNC-F	184.3 x 194 x 433.4
LB-CH-159-15-T06-C-7					1.5	7mm	184.3 x 194 x 433.4
LB-CH-159-15-T06-C-3.5F					1.5	3.5mm-F	184.3 x 194 x 433.4
LB-CH-159-20-A	4.9-7.05	WR159	20	Linear	1.25	FDP58	282.9 x 282.9 x 544.3
LB-CH-159-20-C-SF					1.4	SMA-F	282.9 x 282.9 x 594.3
LB-CH-159-20-C-NF					1.4	N-F	282.9 x 282.9 x 594.3
LB-CH-159-20-C-TF					1.4	TNC-F	282.9 x 282.9 x 594.3
LB-CH-159-20-C-7					1.4	7mm	282.9 x 282.9 x 594.3
LB-CH-159-20-C-3.5F					1.4	3.5mm-F	282.9 x 282.9 x 594.3
LB-CH-159-20-T02-A	4.9-7.05	WR159	20	Dual Linear	1.5	FDP58	282.9 x 282.9 x 604.7
LB-CH-159-20-T02-C-SF					1.6	SMA-F	282.9 x 282.9 x 654.7
LB-CH-159-20-T02-C-NF					1.6	N-F	282.9 x 282.9 x 654.7
LB-CH-159-20-T02-C-TF					1.6	TNC-F	282.9 x 282.9 x 654.7
LB-CH-159-20-T02-C-7					1.6	7mm	282.9 x 282.9 x 654.7
LB-CH-159-20-T02-C-3.5F					1.6	3.5mm-F	282.9 x 282.9 x 654.7
LB-CH-159-20-T06-A	4.9-6.4	WR159	20	Dual Linear	1.4	FDP58	282.9 x 282.9 x 617.4
LB-CH-159-20-T06-C-SF					1.5	SMA-F	282.9 x 282.9 x 667.4
LB-CH-159-20-T06-C-NF					1.5	N-F	282.9 x 282.9 x 667.4
LB-CH-159-20-T06-C-TF					1.5	TNC-F	282.9 x 282.9 x 667.4
LB-CH-159-20-T06-C-7					1.5	7mm	282.9 x 282.9 x 667.4
LB-CH-159-20-T06-C-3.5F					1.5	3.5mm-F	282.9 x 282.9 x 667.4

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-112-15-A	7.05-10.0	WR112	15	Linear	1.25	FBP100	137.2 x 137.2 x 246.2
LB-CH-112-15-C-SF					1.4	SMA-F	137.2 x 137.2 x 286.2
LB-CH-112-15-C-NF					1.4	N-F	137.2 x 137.2 x 286.2
LB-CH-112-15-C-TF					1.4	TNC-F	137.2 x 137.2 x 286.2
LB-CH-112-15-C-7					1.4	7mm	137.2 x 137.2 x 286.2
LB-CH-112-15-C-3.5F					1.4	3.5mm-F	137.2 x 137.2 x 286.2
LB-CH-112-15-T02-A	7.05-10.0	WR112	15	Dual Linear	1.5	FBP100	137.2 x 137.2 x 265.2
LB-CH-112-15-T02-C-SF					1.6	SMA-F	137.2 x 137.2 x 305.2
LB-CH-112-15-T02-C-NF					1.6	N-F	137.2 x 137.2 x 305.2
LB-CH-112-15-T02-C-TF					1.6	TNC-F	137.2 x 137.2 x 305.2
LB-CH-112-15-T02-C-7					1.6	7mm	137.2 x 137.2 x 305.2
LB-CH-112-15-T02-C-3.5F					1.6	3.5mm-F	137.2 x 137.2 x 305.2
LB-CH-112-20-A	7.05-10.0	WR112	20	Linear	1.25	FBP100	-
LB-CH-112-20-C-SF					1.4	SMA-F	-
LB-CH-112-20-C-NF					1.4	N-F	-
LB-CH-112-20-C-TF					1.4	TNC-F	-
LB-CH-112-20-C-7					1.4	7mm	-
LB-CH-112-20-C-3.5F					1.4	3.5mm-F	-
LB-CH-90-15-A	8.2-12.4	WR90	15	Linear	1.3	FBP100	89.8×89.8×228
LB-CH-90-15-C-SF					1.5	SMA-F	89.8×89.8×266
LB-CH-90-15-C-NF					1.5	N-F	89.8×89.8×266
LB-CH-90-15-C-TF					1.5	TNC-F	89.8×89.8×266
LB-CH-90-15-C-7					1.5	7mm	89.8×89.8×266
LB-CH-90-15-C-3.5F					1.5	3.5mm-F	89.8×89.8×266
LB-CH-90-15-R16-A	8.9-11.7	WR90	15	RHCP	1.15	FBP100	89.8×89.8×355
LB-CH-90-15-R16-C-SF					1.3	SMA-F	89.8×89.8×393
LB-CH-90-15-R16-C-NF					1.3	N-F	89.8×89.8×393
LB-CH-90-15-R16-C-TF					1.3	TNC-F	89.8×89.8×393
LB-CH-90-15-R16-C-7					1.3	7mm	89.8×89.8×393
LB-CH-90-15-R16-C-3.5F					1.3	3.5mm-F	89.8×89.8×393



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-90-15-L16-A	8.9-11.7	WR90	15	LHCP	1.15	FBP100	89.8×89.8×355
LB-CH-90-15-L16-C-SF					1.3	SMA-F	89.8×89.8×393
LB-CH-90-15-L16-C-NF					1.3	N-F	89.8×89.8×393
LB-CH-90-15-L16-C-TF					1.3	TNC-F	89.8×89.8×393
LB-CH-90-15-L16-C-7					1.3	7mm	89.8×89.8×393
LB-CH-90-15-L16-C-3.5F					1.3	3.5mm-F	89.8×89.8×393
LB-CH-90-15-T02-A	8.2-12.4	WR90	15	Dual Linear	1.5	FBP100	89.8×89.8×298.9
LB-CH-90-15-T02-C-SF					1.6	SMA-F	103.6×89.8×336.9
LB-CH-90-15-T02-C-NF					1.6	N-F	103.6×89.8×336.9
LB-CH-90-15-T02-C-TF					1.6	TNC-F	103.6×89.8×336.9
LB-CH-90-15-T02-C-7					1.6	7mm	103.6×89.8×336.9
LB-CH-90-15-T02-C-3.5F					1.6	3.5mm-F	103.6×89.8×336.9
LB-CH-90-15-T06-A	8.2-10.8	WR90	15	Dual Linear	1.5	FBP100	89.8×89.8×267.1
LB-CH-90-15-T06-C-SF					1.6	SMA-F	108.2×89.8×305.1
LB-CH-90-15-T06-C-NF					1.6	N-F	108.2×89.8×305.1
LB-CH-90-15-T06-C-TF					1.6	TNC-F	108.2×89.8×305.1
LB-CH-90-15-T06-C-7					1.6	7mm	108.2×89.8×305.1
LB-CH-90-15-T06-C-3.5F					1.6	3.5mm-F	108.2×89.8×305.1
LB-CH-90-15-T16-A	8.9-11.7	WR90	15	Dual Linear	1.5	FBP100	89.8×89.8×267.1
LB-CH-90-15-T16-C-SF					1.6	SMA-F	107.5×89.8×305.1
LB-CH-90-15-T16-C-NF					1.6	N-F	107.5×89.8×305.1
LB-CH-90-15-T16-C-TF					1.6	TNC-F	107.5×89.8×305.1
LB-CH-90-15-T16-C-7					1.6	7mm	107.5×89.8×305.1
LB-CH-90-15-T16-C-3.5F					1.6	3.5mm-F	107.5×89.8×305.1
LB-CH-90-15-T26-A	9.3-12.4	WR90	15	Dual Linear	1.5	FBP100	89.8×89.8×267.1
LB-CH-90-15-T26-C-SF					1.6	SMA-F	107×89.8×305.1
LB-CH-90-15-T26-C-NF					1.6	N-F	107×89.8×305.1
LB-CH-90-15-T26-C-TF					1.6	TNC-F	107×89.8×305.1
LB-CH-90-15-T26-C-7					1.6	7mm	107×89.8×305.1
LB-CH-90-15-T26-C-3.5F					1.6	3.5mm-F	107×89.8×305.1
LB-CH-90-15-D16-A	8.9-11.7	WR90	15	Dual Circular	1.4	FBP100	89.8×89.8×394.1
LB-CH-90-15-D16-C-SF					1.5	SMA-F	107.5×89.8×432.1
LB-CH-90-15-D16-C-NF					1.5	N-F	107.5×89.8×432.1
LB-CH-90-15-D16-C-TF					1.5	TNC-F	107.5×89.8×432.1
LB-CH-90-15-D16-C-7					1.5	7mm	107.5×89.8×432.1
LB-CH-90-15-D16-C-3.5F					1.5	3.5mm-F	107.5×89.8×432.1



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-90-20-A	8.2-12.4	WR90	20	Linear	1.3	FBP100	150×150×335
LB-CH-90-20-C-SF					1.5	SMA-F	150×150×373
LB-CH-90-20-C-NF					1.5	N-F	150×150×373
LB-CH-90-20-C-TF					1.5	TNC-F	150×150×373
LB-CH-90-20-C-7					1.5	7mm	150×150×373
LB-CH-90-20-C-3.5F					1.5	3.5mm-F	150×150×373
LB-CH-90-20-R16-A	8.9-11.7	WR90	20	RHCP	1.15	FBP100	149.6×149.6×462
LB-CH-90-20-R16-C-SF					1.3	SMA-F	149.6×149.6×500
LB-CH-90-20-R16-C-NF					1.3	N-F	149.6×149.6×500
LB-CH-90-20-R16-C-TF					1.3	TNC-F	149.6×149.6×500
LB-CH-90-20-R16-C-7					1.3	7mm	149.6×149.6×500
LB-CH-90-20-R16-C-3.5F					1.3	3.5mm-F	149.6×149.6×500
LB-CH-90-20-L16-A	8.9-11.7	WR90	20	LHCP	1.15	FBP100	149.6×149.6×462
LB-CH-90-20-L16-C-SF					1.3	SMA-F	149.6×149.6×500
LB-CH-90-20-L16-C-NF					1.3	N-F	149.6×149.6×500
LB-CH-90-20-L16-C-TF					1.3	TNC-F	149.6×149.6×500
LB-CH-90-20-L16-C-7					1.3	7mm	149.6×149.6×500
LB-CH-90-20-L16-C-3.5F					1.3	3.5mm-F	149.6×149.6×500
LB-CH-90-20-T02-A	8.2-12.4	WR90	20	Dual Linear	1.5	FBP100	149.6×149.6×406.5
LB-CH-90-20-T02-C-SF					1.6	SMA-F	149.6×149.6×444.5
LB-CH-90-20-T02-C-NF					1.6	N-F	149.6×149.6×444.5
LB-CH-90-20-T02-C-TF					1.6	TNC-F	149.6×149.6×444.5
LB-CH-90-20-T02-C-7					1.6	7mm	149.6×149.6×444.5
LB-CH-90-20-T02-C-3.5F					1.6	3.5mm-F	149.6×149.6×444.5
LB-CH-90-20-T06-A	8.2-10.8	WR90	20	Dual Linear	1.5	FBP100	149.6×149.6×374.7
LB-CH-90-20-T06-C-SF					1.6	SMA-F	149.6×149.6×412.7
LB-CH-90-20-T06-C-NF					1.6	N-F	149.6×149.6×412.7
LB-CH-90-20-T06-C-TF					1.6	TNC-F	149.6×149.6×412.7
LB-CH-90-20-T06-C-7					1.6	7mm	149.6×149.6×412.7
LB-CH-90-20-T06-C-3.5F					1.6	3.5mm-F	149.6×149.6×412.7
LB-CH-90-20-T16-A	8.9-11.7	WR90	20	Dual Linear	1.5	FBP100	149.6×149.6×374.7
LB-CH-90-20-T16-C-SF					1.6	SMA-F	149.6×149.6×412.7
LB-CH-90-20-T16-C-NF					1.6	N-F	149.6×149.6×412.7
LB-CH-90-20-T16-C-TF					1.6	TNC-F	149.6×149.6×412.7
LB-CH-90-20-T16-C-7					1.6	7mm	149.6×149.6×412.7
LB-CH-90-20-T16-C-3.5F					1.6	3.5mm-F	149.6×149.6×412.7



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-90-20-T26-A	9.3-12.4	WR90	20	Dual Linear	1.5	FBP100	149.6×149.6×374.7
LB-CH-90-20-T26-C-SF					1.6	SMA-F	149.6×149.6×412.7
LB-CH-90-20-T26-C-NF					1.6	N-F	149.6×149.6×412.7
LB-CH-90-20-T26-C-TF					1.6	TNC-F	149.6×149.6×412.7
LB-CH-90-20-T26-C-7					1.6	7mm	149.6×149.6×412.7
LB-CH-90-20-T26-C-3.5F					1.6	3.5mm-F	149.6×149.6×412.7
LB-CH-90-20-D16-A	8.9-11.7	WR90	20	Dual Circular	1.4	FBP100	149.6×149.6×501.7
LB-CH-90-20-D16-C-SF					1.5	SMA-F	149.6×149.6×539.7
LB-CH-90-20-D16-C-NF					1.5	N-F	149.6×149.6×539.7
LB-CH-90-20-D16-C-TF					1.5	TNC-F	149.6×149.6×539.7
LB-CH-90-20-D16-C-7					1.5	7mm	149.6×149.6×539.7
LB-CH-90-20-D16-C-3.5F					1.5	3.5mm-F	149.6×149.6×539.7
LB-CH-90-25-A	8.2-12.4	WR90	25	Linear	1.3	FBP100	259.8×259.8×665
LB-CH-90-25-C-SF					1.5	SMA-F	259.8×259.8×703
LB-CH-90-25-C-NF					1.5	N-F	259.8×259.8×703
LB-CH-90-25-C-TF					1.5	TNC-F	259.8×259.8×703
LB-CH-90-25-C-7					1.5	7mm	259.8×259.8×703
LB-CH-90-25-C-3.5F					1.5	3.5mm-F	259.8×259.8×703
LB-CH-90-25-R16-A	8.9-11.7	WR90	25	RHCP	1.15	FBP100	260×260×792
LB-CH-90-25-R16-C-SF					1.3	SMA-F	260×260×830
LB-CH-90-25-R16-C-NF					1.3	N-F	260×260×830
LB-CH-90-25-R16-C-TF					1.3	TNC-F	260×260×830
LB-CH-90-25-R16-C-7					1.3	7mm	260×260×830
LB-CH-90-25-R16-C-3.5F					1.3	3.5mm-F	260×260×830
LB-CH-90-25-L16-A	8.9-11.7	WR90	25	LHCP	1.15	FBP100	260×260×792
LB-CH-90-25-L16-C-SF					1.3	SMA-F	260×260×830
LB-CH-90-25-L16-C-NF					1.3	N-F	260×260×830
LB-CH-90-25-L16-C-TF					1.3	TNC-F	260×260×830
LB-CH-90-25-L16-C-7					1.3	7mm	260×260×830
LB-CH-90-25-L16-C-3.5F					1.3	3.5mm-F	260×260×830
LB-CH-90-25-T02-A	8.2-12.4	WR90	25	Dual Linear	1.4	FBP100	259.8×259.8×736.5
LB-CH-90-25-T02-C-SF					1.5	SMA-F	259.8×259.8×774.5
LB-CH-90-25-T02-C-NF					1.5	N-F	259.8×259.8×774.5
LB-CH-90-25-T02-C-TF					1.5	TNC-F	259.8×259.8×774.5
LB-CH-90-25-T02-C-7					1.5	7mm	259.8×259.8×774.5
LB-CH-90-25-T02-C-3.5F					1.5	3.5mm-F	259.8×259.8×774.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-90-25-T06-A	8.2-10.8	WR90	25	Dual Linear	1.5	FBP100	260×260×704.7
LB-CH-90-25-T06-C-SF					1.6	SMA-F	260×260×742.7
LB-CH-90-25-T06-C-NF					1.6	N-F	260×260×742.7
LB-CH-90-25-T06-C-TF					1.6	TNC-F	260×260×742.7
LB-CH-90-25-T06-C-7					1.6	7mm	260×260×742.7
LB-CH-90-25-T06-C-3.5F					1.6	3.5mm-F	260×260×742.7
LB-CH-90-25-T16-A	8.9-11.7	WR90	25	Dual Linear	1.5	FBP100	260×260×704.7
LB-CH-90-25-T16-C-SF					1.6	SMA-F	260×260×742.7
LB-CH-90-25-T16-C-NF					1.6	N-F	260×260×742.7
LB-CH-90-25-T16-C-TF					1.6	TNC-F	260×260×742.7
LB-CH-90-25-T16-C-7					1.6	7mm	260×260×742.7
LB-CH-90-25-T16-C-3.5F					1.6	3.5mm-F	260×260×742.7
LB-CH-90-25-T26-A	9.3-12.4	WR90	25	Dual Linear	1.5	FBP100	260×260×704.7
LB-CH-90-25-T26-C-SF					1.6	SMA-F	260×260×742.7
LB-CH-90-25-T26-C-NF					1.6	N-F	260×260×742.7
LB-CH-90-25-T26-C-TF					1.6	TNC-F	260×260×742.7
LB-CH-90-25-T26-C-7					1.6	7mm	260×260×742.7
LB-CH-90-25-T26-C-3.5F					1.6	3.5mm-F	260×260×742.7
LB-CH-90-25-D16-A	8.9-11.7	WR90	25	Dual Circular	1.4	FBP100	260×260×831.7
LB-CH-90-25-D16-C-SF					1.5	SMA-F	260×260×869.7
LB-CH-90-25-D16-C-NF					1.5	N-F	260×260×869.7
LB-CH-90-25-D16-C-TF					1.5	TNC-F	260×260×869.7
LB-CH-90-25-D16-C-7					1.5	7mm	260×260×869.7
LB-CH-90-25-D16-C-3.5F					1.5	3.5mm-F	260×260×869.7
LB-CH-75-15-A	10.0-15.0	WR75	15	Linear	1.3	FBP120	81.34×81.34×145.3
LB-CH-75-15-C-SF					1.5	SMA-F	81.34×81.34×175.3
LB-CH-75-15-C-NF					1.5	N-F	81.34×81.34×175.3
LB-CH-75-15-C-TF					1.5	TNC-F	81.34×81.34×175.3
LB-CH-75-15-C-7					1.5	7mm	81.34×81.34×175.3
LB-CH-75-15-C-3.5F					1.5	3.5mm-F	81.34×81.34×175.3
LB-CH-75-15-R16-A	11.0-14.0	WR75	15	RHCP	1.3	FBP120	81.3×81.3×253.3
LB-CH-75-15-R16-C-SF					1.5	SMA-F	81.3×81.3×283.3
LB-CH-75-15-R16-C-NF					1.5	N-F	81.3×81.3×283.3
LB-CH-75-15-R16-C-TF					1.5	TNC-F	81.3×81.3×283.3
LB-CH-75-15-R16-C-7					1.5	7mm	81.3×81.3×283.3
LB-CH-75-15-R16-C-3.5F					1.5	3.5mm-F	81.3×81.3×283.3



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-75-15-L16-A	11.0-14.0	WR75	15	LHCP	1.3	FBP120	81.3×81.3×253.3
LB-CH-75-15-L16-C-SF					1.5	SMA-F	81.3×81.3×283.3
LB-CH-75-15-L16-C-NF					1.5	N-F	81.3×81.3×283.3
LB-CH-75-15-L16-C-TF					1.5	TNC-F	81.3×81.3×283.3
LB-CH-75-15-L16-C-7					1.5	7mm	81.3×81.3×283.3
LB-CH-75-15-L16-C-3.5F					1.5	3.5mm-F	81.3×81.3×283.3
LB-CH-75-15-T02-A	10.0-15.0	WR75	15	Dual Linear	1.5	FBP120	81.3×81.3×234.2
LB-CH-75-15-T02-C-SF					1.6	SMA-F	81.3×89.7×264.2
LB-CH-75-15-T02-C-NF					1.6	N-F	81.3×89.7×264.2
LB-CH-75-15-T02-C-TF					1.6	TNC-F	81.3×89.7×264.2
LB-CH-75-15-T02-C-7					1.6	7mm	81.3×90.5×265
LB-CH-75-15-T02-C-3.5F					1.6	3.5mm-F	81.3×89.7×264.2
LB-CH-75-15-T06-A	10.0-13.0	WR75	15	Dual Linear	1.5	FBP120	81.3×81.3×215.6
LB-CH-75-15-T06-C-SF					1.6	SMA-F	81.3×92.9×245.6
LB-CH-75-15-T06-C-NF					1.6	N-F	81.3×92.9×245.6
LB-CH-75-15-T06-C-TF					1.6	TNC-F	81.3×92.9×245.6
LB-CH-75-15-T06-C-7					1.6	7mm	81.3×93.8×246.5
LB-CH-75-15-T06-C-3.5F					1.6	3.5mm-F	81.3×92.9×245.6
LB-CH-75-15-T16-A	11.0-14.0	WR75	15	Dual Linear	1.5	FBP120	81.3×81.3×215.6
LB-CH-75-15-T16-C-SF					1.6	SMA-F	81.3×92.4×245.6
LB-CH-75-15-T16-C-NF					1.6	N-F	81.3×92.4×245.6
LB-CH-75-15-T16-C-TF					1.6	TNC-F	81.3×92.4×245.6
LB-CH-75-15-T16-C-7					1.6	7mm	81.3×93.8×246.5
LB-CH-75-15-T16-C-3.5F					1.6	3.5mm-F	81.3×92.4×245.6
LB-CH-75-15-T26-A	12.0-15.0	WR75	15	Dual Linear	1.5	FBP120	81.3×81.3×215.6
LB-CH-75-15-T26-C-SF					1.6	SMA-F	81.3×91.8×245.6
LB-CH-75-15-T26-C-NF					1.6	N-F	81.3×91.8×245.6
LB-CH-75-15-T26-C-TF					1.6	TNC-F	81.3×91.8×245.6
LB-CH-75-15-T26-C-7					1.6	7mm	81.3×93.8×246.5
LB-CH-75-15-T26-C-3.5F					1.6	3.5mm-F	81.3×91.8×245.6
LB-CH-75-15-D16-A	11.0-14.0	WR75	15	Dual Circular	1.4	FBP120	81.3×81.3×323.6
LB-CH-75-15-D16-C-SF					1.5	SMA-F	81.3×92.4×353.6
LB-CH-75-15-D16-C-NF					1.5	N-F	81.3×92.4×353.6
LB-CH-75-15-D16-C-TF					1.5	TNC-F	81.3×92.4×353.6
LB-CH-75-15-D16-C-7					1.5	7mm	81.3×93.3×354.5
LB-CH-75-15-D16-C-3.5F					1.5	3.5mm-F	81.3×92.4×353.6



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-75-20-A	10.0-15.0	WR75	20	Linear	1.3	FBP120	136.44×136.44×251.4
LB-CH-75-20-C-SF					1.5	SMA-F	136.44×136.44×281.4
LB-CH-75-20-C-NF					1.5	N-F	136.44×136.44×281.4
LB-CH-75-20-C-TF					1.5	TNC-F	136.44×136.44×281.4
LB-CH-75-20-C-7					1.5	7mm	136.44×136.44×281.4
LB-CH-75-20-C-3.5F					1.5	3.5mm-F	136.44×136.44×281.4
LB-CH-75-20-R16-A	11.0-14.0	WR75	20	RHCP	1.15	FBP120	136.44×136.44×359.4
LB-CH-75-20-R16-C-SF					1.3	SMA-F	136.44×136.44×389.4
LB-CH-75-20-R16-C-NF					1.3	N-F	136.44×136.44×389.4
LB-CH-75-20-R16-C-TF					1.3	TNC-F	136.44×136.44×389.4
LB-CH-75-20-R16-C-7					1.3	7mm	136.44×136.44×389.4
LB-CH-75-20-R16-C-3.5F					1.3	3.5mm-F	136.44×136.44×389.4
LB-CH-75-20-L16-A	11.0-14.0	WR75	20	LHCP	1.15	FBP120	136.44×136.44×359.4
LB-CH-75-20-L16-C-SF					1.3	SMA-F	136.44×136.44×389.4
LB-CH-75-20-L16-C-NF					1.3	N-F	136.44×136.44×389.4
LB-CH-75-20-L16-C-TF					1.3	TNC-F	136.44×136.44×389.4
LB-CH-75-20-L16-C-7					1.3	7mm	136.44×136.44×389.4
LB-CH-75-20-L16-C-3.5F					1.3	3.5mm-F	136.44×136.44×389.4
LB-CH-75-20-T02-A	10.0-15.0	WR75	20	Dual Linear	1.5	FBP120	136.4×136.4×340.3
LB-CH-75-20-T02-C-SF					1.6	SMA-F	136.4×136.4×370.3
LB-CH-75-20-T02-C-NF					1.6	N-F	136.4×136.4×370.3
LB-CH-75-20-T02-C-TF					1.6	TNC-F	136.4×136.4×370.3
LB-CH-75-20-T02-C-7					1.6	7mm	136.4×136.4×370.3
LB-CH-75-20-T02-C-3.5F					1.6	3.5mm-F	136.4×136.4×370.3
LB-CH-75-20-T06-A	10.0-13.0	WR75	20	Dual Linear	1.5	FBP120	136.4×136.4×321.7
LB-CH-75-20-T06-C-SF					1.6	SMA-F	136.4×136.4×351.7
LB-CH-75-20-T06-C-NF					1.6	N-F	136.4×136.4×351.7
LB-CH-75-20-T06-C-TF					1.6	TNC-F	136.4×136.4×351.7
LB-CH-75-20-T06-C-7					1.6	7mm	136.4×136.4×351.7
LB-CH-75-20-T06-C-3.5F					1.6	3.5mm-F	136.4×136.4×351.7
LB-CH-75-20-T16-A	11.0-14.0	WR75	20	Dual Linear	1.5	FBP120	136.4×136.4×321.7
LB-CH-75-20-T16-C-SF					1.6	SMA-F	136.4×136.4×351.7
LB-CH-75-20-T16-C-NF					1.6	N-F	136.4×136.4×351.7
LB-CH-75-20-T16-C-TF					1.6	TNC-F	136.4×136.4×351.7
LB-CH-75-20-T16-C-7					1.6	7mm	136.4×136.4×351.7
LB-CH-75-20-T16-C-3.5F					1.6	3.5mm-F	136.4×136.4×351.7



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-75-20-T26-A	12.0-15.0	WR75	20	Dual Linear	1.5	FBP120	136.4×136.4×321.7
LB-CH-75-20-T26-C-SF					1.6	SMA-F	136.4×136.4×351.7
LB-CH-75-20-T26-C-NF					1.6	N-F	136.4×136.4×351.7
LB-CH-75-20-T26-C-TF					1.6	TNC-F	136.4×136.4×351.7
LB-CH-75-20-T26-C-7					1.6	7mm	136.4×136.4×351.7
LB-CH-75-20-T26-C-3.5F					1.6	3.5mm-F	136.4×136.4×351.7
LB-CH-75-20-D16-A	11.0-14.0	WR75	20	Dual Circular	1.4	FBP120	136.4×136.4×429.7
LB-CH-75-20-D16-C-SF					1.5	SMA-F	136.4×136.4×459.7
LB-CH-75-20-D16-C-NF					1.5	N-F	136.4×136.4×459.7
LB-CH-75-20-D16-C-TF					1.5	TNC-F	136.4×136.4×459.7
LB-CH-75-20-D16-C-7					1.5	7mm	136.4×136.4×459.7
LB-CH-75-20-D16-C-3.5F					1.5	3.5mm-F	136.4×136.4×459.7
LB-CH-75-25-A	10.0-15.0	WR75	25	Linear	1.3	FBP120	-
LB-CH-75-25-C-SF					1.5	SMA-F	-
LB-CH-75-25-C-NF					1.5	N-F	-
LB-CH-75-25-C-TF					1.5	TNC-F	-
LB-CH-75-25-C-7					1.5	7mm	-
LB-CH-75-25-C-3.5F					1.5	3.5mm-F	-
LB-CH-75-25-R16-A	11.0-14.0	WR75	25	RHCP	1.3	FBP120	-
LB-CH-75-25-R16-C-SF					1.5	SMA-F	-
LB-CH-75-25-R16-C-NF					1.5	N-F	-
LB-CH-75-25-R16-C-TF					1.5	TNC-F	-
LB-CH-75-25-R16-C-7					1.5	7mm	-
LB-CH-75-25-R16-C-3.5F					1.5	3.5mm-F	-
LB-CH-75-25-L16-A	11.0-14.0	WR75	25	LHCP	1.3	FBP120	-
LB-CH-75-25-L16-C-SF					1.5	SMA-F	-
LB-CH-75-25-L16-C-NF					1.5	N-F	-
LB-CH-75-25-L16-C-TF					1.5	TNC-F	-
LB-CH-75-25-L16-C-7					1.5	7mm	-
LB-CH-75-25-L16-C-3.5F					1.5	3.5mm-F	-
LB-CH-75-25-T02-A	10.0-15.0	WR75	25	Dual Linear	1.5	FBP120	-
LB-CH-75-25-T02-C-SF					1.6	SMA-F	-
LB-CH-75-25-T02-C-NF					1.6	N-F	-
LB-CH-75-25-T02-C-TF					1.6	TNC-F	-
LB-CH-75-25-T02-C-7					1.6	7mm	-
LB-CH-75-25-T02-C-3.5F					1.6	3.5mm-F	-

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-75-25-T06-A	10.0-13.0	WR75	25	Dual Linear	1.5	FBP120	-
LB-CH-75-25-T06-C-SF					1.6	SMA-F	-
LB-CH-75-25-T06-C-NF					1.6	N-F	-
LB-CH-75-25-T06-C-TF					1.6	TNC-F	-
LB-CH-75-25-T06-C-7					1.6	7mm	-
LB-CH-75-25-T06-C-3.5F					1.6	3.5mm-F	-
LB-CH-75-25-T16-A	11.0-14.0	WR75	25	Dual Linear	1.5	FBP120	-
LB-CH-75-25-T16-C-SF					1.6	SMA-F	-
LB-CH-75-25-T16-C-NF					1.6	N-F	-
LB-CH-75-25-T16-C-TF					1.6	TNC-F	-
LB-CH-75-25-T16-C-7					1.6	7mm	-
LB-CH-75-25-T16-C-3.5F					1.6	3.5mm-F	-
LB-CH-75-25-T26-A	12.0-15.0	WR75	25	Dual Linear	1.5	FBP120	-
LB-CH-75-25-T26-C-SF					1.6	SMA-F	-
LB-CH-75-25-T26-C-NF					1.6	N-F	-
LB-CH-75-25-T26-C-TF					1.6	TNC-F	-
LB-CH-75-25-T26-C-7					1.6	7mm	-
LB-CH-75-25-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-75-25-D16-A	11.0-14.0	WR75	25	Dual Circular	1.5	FBP120	-
LB-CH-75-25-D16-C-SF					1.6	SMA-F	-
LB-CH-75-25-D16-C-NF					1.6	N-F	-
LB-CH-75-25-D16-C-TF					1.6	TNC-F	-
LB-CH-75-25-D16-C-7					1.6	7mm	-
LB-CH-75-25-D16-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-15-A	12.4-18.0	WR62	15	Linear	1.3	FBP140	-
LB-CH-62-15-C-SF					1.5	SMA-F	-
LB-CH-62-15-C-NF					1.5	N-F	-
LB-CH-62-15-C-TF					1.5	TNC-F	-
LB-CH-62-15-C-7					1.5	7mm	-
LB-CH-62-15-C-3.5F					1.5	3.5mm-F	-
LB-CH-62-15-T02-A	12.4-18.0	WR62	15	Dual Linear	1.5	FBP140	-
LB-CH-62-15-T02-C-SF					1.6	SMA-F	-
LB-CH-62-15-T02-C-NF					1.6	N-F	-
LB-CH-62-15-T02-C-TF					1.6	TNC-F	-
LB-CH-62-15-T02-C-7					1.6	7mm	-
LB-CH-62-15-T02-C-3.5F					1.6	3.5mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-62-15-T06-A	12.4-16.2	WR62	15	Dual Linear	1.5	FBP140	-
LB-CH-62-15-T06-C-SF					1.6	SMA-F	-
LB-CH-62-15-T06-C-NF					1.6	N-F	-
LB-CH-62-15-T06-C-TF					1.6	TNC-F	-
LB-CH-62-15-T06-C-7					1.6	7mm	-
LB-CH-62-15-T06-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-15-T16-A	13.2-17.2	WR62	15	Dual Linear	1.5	FBP140	-
LB-CH-62-15-T16-C-SF					1.6	SMA-F	-
LB-CH-62-15-T16-C-NF					1.6	N-F	-
LB-CH-62-15-T16-C-TF					1.6	TNC-F	-
LB-CH-62-15-T16-C-7					1.6	7mm	-
LB-CH-62-15-T16-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-15-T26-A	13.8-18.0	WR62	15	Dual Linear	1.5	FBP140	-
LB-CH-62-15-T26-C-SF					1.6	SMA-F	-
LB-CH-62-15-T26-C-NF					1.6	N-F	-
LB-CH-62-15-T26-C-TF					1.6	TNC-F	-
LB-CH-62-15-T26-C-7					1.6	7mm	-
LB-CH-62-15-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-20-A	12.4-18.0	WR62	20	Linear	1.3	FBP140	-
LB-CH-62-20-C-SF					1.5	SMA-F	-
LB-CH-62-20-C-NF					1.5	N-F	-
LB-CH-62-20-C-TF					1.5	TNC-F	-
LB-CH-62-20-C-7					1.5	7mm	-
LB-CH-62-20-C-3.5F					1.5	3.5mm-F	-
LB-CH-62-20-T02-A	12.4-18.0	WR62	20	Dual Linear	1.5	FBP140	-
LB-CH-62-20-T02-C-SF					1.6	SMA-F	-
LB-CH-62-20-T02-C-NF					1.6	N-F	-
LB-CH-62-20-T02-C-TF					1.6	TNC-F	-
LB-CH-62-20-T02-C-7					1.6	7mm	-
LB-CH-62-20-T02-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-20-T06-A	12.4-16.2	WR62	20	Dual Linear	1.5	FBP140	-
LB-CH-62-20-T06-C-SF					1.6	SMA-F	-
LB-CH-62-20-T06-C-NF					1.6	N-F	-
LB-CH-62-20-T06-C-TF					1.6	TNC-F	-
LB-CH-62-20-T06-C-7					1.6	7mm	-
LB-CH-62-20-T06-C-3.5F					1.6	3.5mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-62-20-T16-A	13.2-17.2	WR62	20	Dual Linear	1.5	FBP140	-
LB-CH-62-20-T16-C-SF					1.6	SMA-F	-
LB-CH-62-20-T16-C-NF					1.6	N-F	-
LB-CH-62-20-T16-C-TF					1.6	TNC-F	-
LB-CH-62-20-T16-C-7					1.6	7mm	-
LB-CH-62-20-T16-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-20-T26-A	13.8-18.0	WR62	20	Dual Linear	1.5	FBP140	-
LB-CH-62-20-T26-C-SF					1.6	SMA-F	-
LB-CH-62-20-T26-C-NF					1.6	N-F	-
LB-CH-62-20-T26-C-TF					1.6	TNC-F	-
LB-CH-62-20-T26-C-7					1.6	7mm	-
LB-CH-62-20-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-25-A	12.4-18.0	WR62	25	Linear	1.3	FBP140	-
LB-CH-62-25-C-SF					1.5	SMA-F	-
LB-CH-62-25-C-NF					1.5	N-F	-
LB-CH-62-25-C-TF					1.5	TNC-F	-
LB-CH-62-25-C-7					1.5	7mm	-
LB-CH-62-25-C-3.5F					1.5	3.5mm-F	-
LB-CH-62-25-T02-A	12.4-18.0	WR62	25	Dual Linear	1.5	FBP140	-
LB-CH-62-25-T02-C-SF					1.6	SMA-F	-
LB-CH-62-25-T02-C-NF					1.6	N-F	-
LB-CH-62-25-T02-C-TF					1.6	TNC-F	-
LB-CH-62-25-T02-C-7					1.6	7mm	-
LB-CH-62-25-T02-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-25-T06-A	12.4-16.2	WR62	25	Dual Linear	1.5	FBP140	-
LB-CH-62-25-T06-C-SF					1.6	SMA-F	-
LB-CH-62-25-T06-C-NF					1.6	N-F	-
LB-CH-62-25-T06-C-TF					1.6	TNC-F	-
LB-CH-62-25-T06-C-7					1.6	7mm	-
LB-CH-62-25-T06-C-3.5F					1.6	3.5mm-F	-
LB-CH-62-25-T16-A	13.2-17.2	WR62	25	Dual Linear	1.5	FBP140	-
LB-CH-62-25-T16-C-SF					1.6	SMA-F	-
LB-CH-62-25-T16-C-NF					1.6	N-F	-
LB-CH-62-25-T16-C-TF					1.6	TNC-F	-
LB-CH-62-25-T16-C-7					1.6	7mm	-
LB-CH-62-25-T16-C-3.5F					1.6	3.5mm-F	-



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-62-25-T26-A	13.8-18.0	WR62	25	Dual Linear	1.5	FBP140	-
LB-CH-62-25-T26-C-SF					1.6	SMA-F	-
LB-CH-62-25-T26-C-NF					1.6	N-F	-
LB-CH-62-25-T26-C-TF					1.6	TNC-F	-
LB-CH-62-25-T26-C-7					1.6	7mm	-
LB-CH-62-25-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-51-15-A	15.0-22.0	WR51	15	Linear	1.3	FBP180	-
LB-CH-51-15-C-SF					1.5	SMA-F	-
LB-CH-51-15-T02-A	15.0-22.0	WR51	15	Dual Linear	1.5	FBP180	-
LB-CH-51-15-T02-C-SF					1.6	SMA-F	-
LB-CH-51-15-T06-A	15.0-19.5	WR51	15	Dual Linear	1.5	FBP180	-
LB-CH-51-15-T06-C-SF					1.6	SMA-F	-
LB-CH-51-15-T16-A	16.0-21.0	WR51	15	Dual Linear	1.5	FBP180	-
LB-CH-51-15-T16-C-SF					1.6	SMA-F	-
LB-CH-51-15-T26-A	17.0-22.0	WR51	15	Dual Linear	1.5	FBP180	-
LB-CH-51-15-T26-C-SF					1.6	SMA-F	-
LB-CH-51-20-A	15.0-22.0	WR51	20	Linear	1.3	FBP180	-
LB-CH-51-20-C-SF					1.5	SMA-F	-
LB-CH-51-20-T02-A	15.0-22.0	WR51	20	Dual Linear	1.5	FBP180	-
LB-CH-51-20-T02-C-SF					1.6	SMA-F	-
LB-CH-51-20-T06-A	15.0-19.5	WR51	20	Dual Linear	1.5	FBP180	-
LB-CH-51-20-T06-C-SF					1.6	SMA-F	-
LB-CH-51-20-T16-A	16.0-21.0	WR51	20	Dual Linear	1.5	FBP180	-
LB-CH-51-20-T16-C-SF					1.6	SMA-F	-
LB-CH-51-20-T26-A	17.0-22.0	WR51	20	Dual Linear	1.5	FBP180	-
LB-CH-51-20-T26-C-SF					1.6	SMA-F	-
LB-CH-51-25-A	15.0-22.0	WR51	25	Linear	1.3	FBP180	-
LB-CH-51-25-C-SF					1.5	SMA-F	-
LB-CH-51-25-T02-A	15.0-22.0	WR51	25	Dual Linear	1.5	FBP180	-
LB-CH-51-25-T02-C-SF					1.6	SMA-F	-
LB-CH-51-25-T06-A	15.0-19.5	WR51	25	Dual Linear	1.5	FBP180	-
LB-CH-51-25-T06-C-SF					1.6	SMA-F	-
LB-CH-51-25-T16-A	16.0-21.0	WR51	25	Dual Linear	1.5	FBP180	-
LB-CH-51-25-T16-C-SF					1.6	SMA-F	-
LB-CH-51-25-T26-A	17.0-22.0	WR51	25	Dual Linear	1.5	FBP180	-
LB-CH-51-25-T26-C-SF					1.6	SMA-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-42-15-A	18.0-26.5	WR42	15	Linear	1.25	FBP220	-
LB-CH-42-15-C-SF					1.4	SMA-F	-
LB-CH-42-15-C-KF					1.4	2.92mm(K)-F	-
LB-CH-42-15-C-3.5F					1.4	3.5mm-F	-
LB-CH-42-15-T02-A	18.0-26.5	WR42	15	Dual Linear	1.5	FBP220	-
LB-CH-42-15-T02-C-SF					1.5	SMA-F	-
LB-CH-42-15-T02-C-KF					1.5	2.92mm(K)-F	-
LB-CH-42-15-T02-C-3.5F					1.5	3.5mm-F	-
LB-CH-42-15-T06-A	18.0-24.0	WR42	15	Dual Linear	2	FBP220	-
LB-CH-42-15-T06-C-SF					2	SMA-F	-
LB-CH-42-15-T06-C-KF					2	2.92mm(K)-F	-
LB-CH-42-15-T06-C-3.5F					2	3.5mm-F	-
LB-CH-42-15-T16-A	19.1-25.4	WR42	15	Dual Linear	1.6	FBP220	-
LB-CH-42-15-T16-C-SF					1.6	SMA-F	-
LB-CH-42-15-T16-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-15-T16-C-3.5F					1.6	3.5mm-F	-
LB-CH-42-15-T26-A	20.0-26.5	WR42	15	Dual Linear	1.6	FBP220	-
LB-CH-42-15-T26-C-SF					1.6	SMA-F	-
LB-CH-42-15-T26-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-15-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-42-20-A	18.0-26.5	WR42	20	Linear	1.25	FBP220	-
LB-CH-42-20-C-SF					1.4	SMA-F	-
LB-CH-42-20-C-KF					1.4	2.92mm(K)-F	-
LB-CH-42-20-C-3.5F					1.4	3.5mm-F	-
LB-CH-42-20-T02-A	18.0-26.5	WR42	20	Dual Linear	1.5	FBP220	-
LB-CH-42-20-T02-C-SF					1.5	SMA-F	-
LB-CH-42-20-T02-C-KF					1.5	2.92mm(K)-F	-
LB-CH-42-20-T02-C-3.5F					1.5	3.5mm-F	-
LB-CH-42-20-T06-A	18.0-24.0	WR42	20	Dual Linear	2	FBP220	-
LB-CH-42-20-T06-C-SF					2	SMA-F	-
LB-CH-42-20-T06-C-KF					2	2.92mm(K)-F	-
LB-CH-42-20-T06-C-3.5F					2	3.5mm-F	-
LB-CH-42-20-T16-A	19.1-25.4	WR42	20	Dual Linear	1.6	FBP220	-
LB-CH-42-20-T16-C-SF					1.6	SMA-F	-
LB-CH-42-20-T16-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-20-T16-C-3.5F					1.6	3.5mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-42-20-T26-A	20.0-26.5	WR42	20	Dual Linear	1.6	FBP220	-
LB-CH-42-20-T26-C-SF					1.6	SMA-F	-
LB-CH-42-20-T26-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-20-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-42-25-A	18.0-26.5	WR42	25	Linear	1.25	FBP220	-
LB-CH-42-25-C-SF					1.4	SMA-F	-
LB-CH-42-25-C-KF					1.4	2.92mm(K)-F	-
LB-CH-42-25-C-3.5F					1.4	3.5mm-F	-
LB-CH-42-25-T02-A	18.0-26.5	WR42	25	Dual Linear	1.5	FBP220	-
LB-CH-42-25-T02-C-SF					1.5	SMA-F	-
LB-CH-42-25-T02-C-KF					1.5	2.92mm(K)-F	-
LB-CH-42-25-T02-C-3.5F					1.5	3.5mm-F	-
LB-CH-42-25-T06-A	18.0-24.0	WR42	25	Dual Linear	2	FBP220	-
LB-CH-42-25-T06-C-SF					2	SMA-F	-
LB-CH-42-25-T06-C-KF					2	2.92mm(K)-F	-
LB-CH-42-25-T06-C-3.5F					2	3.5mm-F	-
LB-CH-42-25-T16-A	19.1-25.4	WR42	25	Dual Linear	1.6	FBP220	-
LB-CH-42-25-T16-C-SF					1.6	SMA-F	-
LB-CH-42-25-T16-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-25-T16-C-3.5F					1.6	3.5mm-F	-
LB-CH-42-25-T26-A	20.0-26.5	WR42	25	Dual Linear	1.6	FBP220	-
LB-CH-42-25-T26-C-SF					1.6	SMA-F	-
LB-CH-42-25-T26-C-KF					1.6	2.92mm(K)-F	-
LB-CH-42-25-T26-C-3.5F					1.6	3.5mm-F	-
LB-CH-34-15-A	22.0-33.0	WR34	15	Linear	1.25	FBP260	38.6×38.6×92.8
LB-CH-34-15-C-KF					1.4	2.92mm(K)-F	38.6×38.6×116.8
LB-CH-34-15-T02-A	22.0-33.0	WR34	15	Dual Linear	1.5	FBP260	38.6×38.6×105.5
LB-CH-34-15-T02-C-KF					1.6	2.92mm(K)-F	54.5×38.6×129.5
LB-CH-34-15-T06-A	22.0-29.0	WR34	15	Dual Linear	1.5	FBP260	38.6×38.6×111.9
LB-CH-34-15-T06-C-KF					1.6	2.92mm(K)-F	38.6×57.6×135.9
LB-CH-34-15-T16-A	23.8-31.2	WR34	15	Dual Linear	1.5	FBP260	38.6×38.6×111.9
LB-CH-34-15-T16-C-KF					1.6	2.92mm(K)-F	38.6×57.6×135.9
LB-CH-34-15-T26-A	25.0-33.0	WR34	15	Dual Linear	1.8	FBP260	38.6×38.6×111.9
LB-CH-34-15-T26-C-KF					1.8	2.92mm(K)-F	38.6×57.6×135.9
LB-CH-34-20-A	22.0-33.0	WR34	20	Linear	1.25	FBP260	60.2×60.2×140.9
LB-CH-34-20-C-KF					1.4	2.92mm(K)-F	60.2×60.2×164.9



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-34-20-T02-A	22.0-33.0	WR34	20	Dual Linear	1.5	FBP260	60.2×60.2×153.6
LB-CH-34-20-T02-C-KF					1.6	2.92mm(K)-F	65.3×60.2×177.6
LB-CH-34-20-T06-A	22.0-29.0	WR34	20	Dual Linear	1.5	FBP260	60.2×60.2×160
LB-CH-34-20-T06-C-KF					1.6	2.92mm(K)-F	60.2×68.4×184
LB-CH-34-20-T16-A	23.8-31.2	WR34	20	Dual Linear	1.5	FBP260	60.2×60.2×160
LB-CH-34-20-T16-C-KF					1.6	2.92mm(K)-F	60.2×68.4×184
LB-CH-34-20-T26-A	25.0-33.0	WR34	20	Dual Linear	1.8	FBP260	60.2×60.2×160
LB-CH-34-20-T26-C-KF					1.8	2.92mm(K)-F	60.2×68.4×184
LB-CH-34-25-A	22.0-33.0	WR34	25	Linear	1.25	FBP260	110×110×318.5
LB-CH-34-25-C-KF					1.4	2.92mm(K)-F	110×110×342.5
LB-CH-34-25-T02-A	22.0-33.0	WR34	25	Dual Linear	1.5	FBP260	110×110×331.2
LB-CH-34-25-T02-C-KF					1.6	2.92mm(K)-F	110×110×355.2
LB-CH-34-25-T06-A	22.0-29.0	WR34	25	Dual Linear	1.5	FBP260	110×110×337.6
LB-CH-34-25-T06-C-KF					1.6	2.92mm(K)-F	110×110×361.6
LB-CH-34-25-T16-A	23.8-31.2	WR34	25	Dual Linear	1.5	FBP260	110×110×337.6
LB-CH-34-25-T16-C-KF					1.6	2.92mm(K)-F	110×110×361.6
LB-CH-34-25-T26-A	25.0-33.0	WR34	25	Dual Linear	1.8	FBP260	110×110×337.6
LB-CH-34-25-T26-C-KF					1.8	2.92mm(K)-F	110×110×361.6
LB-CH-28-15-A	26.5-40.0	WR28	15	Linear	1.20	FBP320	31.7×31.7×72.6
LB-CH-28-15-C-KF					1.4	2.92mm(K)-F	31.7×32×96.6
LB-CH-28-15-C-2.4F					1.4	2.4mm-F	31.7×32.9×96.6
LB-CH-28-15-62-A	23.5-43.5	WR28	15	Linear	1.25	FBP320	34.2×34.2×75.6
LB-CH-28-15-62-C-KF	23.5-40.0				1.4	2.92mm(K)-F	34.2×34.2×99.6
LB-CH-28-15-62-C-2.4F	23.5-43.5				1.4	2.4mm-F	34.2×34.2×98.4
LB-CH-28-15-T02-A	26.5-40.0	WR28	15	Dual Linear	1.5	FBP320	31.7×38.1×89.1
LB-CH-28-15-T02-C-KF					1.5	2.92mm(K)-F	52.6×38.1×113.1
LB-CH-28-15-T02-C-2.4F					1.5	2.4mm-F	52.6×38.1×113.1
LB-CH-28-15-T06-A	30.0-40.0	WR28	15	Dual Linear	1.8	FBP320	31.7×31.7×91.55
LB-CH-28-15-T06-C-KF					1.8	2.92mm(K)-F	32×54.2×115.6
LB-CH-28-15-T06-C-2.4F					1.8	2.4mm-F	32.9×54.2×115.6
LB-CH-28-15-T16-A	28.5-38.0	WR28	15	Dual Linear	1.8	FBP320	31.7×31.7×91.55
LB-CH-28-15-T16-C-KF					1.8	2.92mm(K)-F	32×54.2×115.6
LB-CH-28-15-T16-C-2.4F					1.8	2.4mm-F	32.9×54.2×115.6
LB-CH-28-15-T26-A	26.0-35.0	WR28	15	Dual Linear	1.6	FBP320	31.7×31.7×93.55
LB-CH-28-15-T26-C-KF					1.6	2.92mm(K)-F	32×54.2×117.6
LB-CH-28-15-T26-C-2.4F					1.6	2.4mm-F	32.9×54.2×117.6



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-28-15-T62-A	23.5-43.5	WR28	15	Dual Linear	1.8	FBP320	34.2×38.1×113.7
LB-CH-28-15-T62-C-KF	23.5-40.0				1.8	2.92mm(K)-F	55.4×38.1×137.7
LB-CH-28-15-T62-C-2.4F	23.5-43.5				1.8	2.4mm-F	55.4×38.1×137.7
LB-CH-28-15-T63-A	23.0-44.0	WR28	15	Dual Linear	1.8	FBP320	31.4×34.2×101
LB-CH-28-15-T63-C-KF	23.0-40.0				1.8	2.92mm(K)-F	55.4×34.2×125
LB-CH-28-15-T63-C-2.4F	23.0-44.0				1.8	2.4mm-F	55.4×34.2×125
LB-CH-28-20-A	26.5-40.0	WR28	20	Linear	1.2	FBP320	49.1×49.1×111.6
LB-CH-28-20-C-KF					1.4	2.92mm(K)-F	49.1×49.1×135.6
LB-CH-28-20-C-2.4F					1.4	2.4mm-F	49.1×49.1×135.6
LB-CH-28-20-62-A	23.5-43.5	WR28	20	Linear	1.25	FBP320	49.4×49.4×111.6
LB-CH-28-20-62-C-KF	23.5-40.0				1.4	2.92mm(K)-F	49.4×49.4×135.6
LB-CH-28-20-62-C-2.4F	23.5-43.5				1.4	2.4mm-F	49.4×49.4×134.4
LB-CH-28-20-T02-A	26.5-40.0	WR28	20	Dual Linear	1.5	FBP320	49.1×49.1×128.1
LB-CH-28-20-T02-C-KF					1.5	2.92mm(K)-F	62.9×49.1×152.1
LB-CH-28-20-T02-C-2.4F					1.5	2.4mm-F	62.9×49.1×152.1
LB-CH-28-20-T06-A	30.0-40.0	WR28	20	Dual Linear	1.8	FBP320	49.1×49.1×130.6
LB-CH-28-20-T06-C-KF					1.8	2.92mm(K)-F	49.1×62.9×154.6
LB-CH-28-20-T06-C-2.4F					1.8	2.4mm-F	49.1×62.9×154.6
LB-CH-28-20-T16-A	28.5-38.0	WR28	20	Dual Linear	1.8	FBP320	49.1×49.1×130.6
LB-CH-28-20-T16-C-KF					1.8	2.92mm(K)-F	49.1×62.9×154.6
LB-CH-28-20-T16-C-2.4F					1.8	2.4mm-F	49.1×62.9×154.6
LB-CH-28-20-T26-A	26.0-35.0	WR28	20	Dual Linear	1.6	FBP320	49.1×49.1×132.6
LB-CH-28-20-T26-C-KF					1.6	2.92mm(K)-F	49.1×62.9×156.6
LB-CH-28-20-T26-C-2.4F					1.6	2.4mm-F	49.1×62.9×156.6
LB-CH-28-20-T62-A	23.5-43.5	WR28	20	Dual Linear	1.8	FBP320	49.4×49.4×149.7
LB-CH-28-20-T62-C-KF	23.5-40.0				1.8	2.92mm(K)-F	67×49.4×173.7
LB-CH-28-20-T62-C-2.4F	23.5-43.5				1.8	2.4mm-F	67×49.4×173.7
LB-CH-28-20-T64-A	22.5-45.0	WR28	20	Dual Linear	1.8	FBP320	54.3×54.3×207.6
LB-CH-28-20-T64-C-2.4F					2	2.4mm-F	64.3×54.3×230.5
LB-CH-28-20-T68-A	24.0-50.0	WR28	20	Dual Linear	2	FBP320	53.8×53.8×202.9
LB-CH-28-20-T68-C-2.4F					2	2.4mm-F	64.8×53.8×226.5
LB-CH-28-25-A	26.5-40.0	WR28	25	Linear	1.25	FBP320	89.3×89.3×255.6
LB-CH-28-25-C-KF					1.4	2.92mm(K)-F	89.3×89.3×279.6
LB-CH-28-25-C-2.4F					1.4	2.4mm-F	89.3×89.3×279.6
LB-CH-28-25-62-A	23.5-43.5	WR28	25	Linear	1.25	FBP320	-
LB-CH-28-25-62-C-KF	23.5-40.0				1.4	2.92mm(K)-F	-
LB-CH-28-25-62-C-2.4F	23.5-43.5				1.4	2.4mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-28-25-T02-A	26.5-40.0	WR28	25	Dual Linear	1.5	FBP320	89.3×89.3×278.5
LB-CH-28-25-T02-C-KF					1.5	2.92mm(K)-F	89.3×89.3×302.5
LB-CH-28-25-T02-C-2.4F					1.5	2.4mm-F	89.3×89.3×302.5
LB-CH-28-25-T06-A	30.0-40.0	WR28	25	Dual Linear	1.6	FBP320	89.3×89.3×274.6
LB-CH-28-25-T06-C-KF					1.6	2.92mm(K)-F	89.3×89.3×298.6
LB-CH-28-25-T06-C-2.4F					1.6	2.4mm-F	89.3×89.3×298.6
LB-CH-28-25-T16-A	28.5-38.0	WR28	25	Dual Linear	1.6	FBP320	89.3×89.3×274.6
LB-CH-28-25-T16-C-KF					1.6	2.92mm(K)-F	89.3×89.3×298.6
LB-CH-28-25-T16-C-2.4F					1.6	2.4mm-F	89.3×89.3×298.6
LB-CH-28-25-T26-A	26.0-35.0	WR28	25	Dual Linear	1.6	FBP320	89.3×89.3×276.6
LB-CH-28-25-T26-C-KF					1.6	2.92mm(K)-F	89.3×89.3×300.6
LB-CH-28-25-T26-C-2.4F					1.6	2.4mm-F	89.3×89.3×300.6
LB-CH-28-25-T62-A	23.5-43.5	WR28	25	Dual Linear	1.8	FBP320	-
LB-CH-28-25-T62-C-KF	23.5-40.0				1.8	2.92mm(K)-F	-
LB-CH-28-25-T62-C-2.4F	23.5-43.5				1.8	2.4mm-F	-
LB-CH-22-15-A	33.0-50.0	WR22	15	Linear	1.25	FUGP400	-
LB-CH-22-15-C-2.4F					1.5	2.4mm-F	-
LB-CH-22-15-T02-A	33.0-50.0	WR22	15	Dual Linear	1.6	FUGP400	-
LB-CH-22-15-T02-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-15-T06-A	33.0-43.0	WR22	15	Dual Linear	1.8	FUGP400	-
LB-CH-22-15-T06-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-15-T16-A	36.0-47.0	WR22	15	Dual Linear	1.8	FUGP400	-
LB-CH-22-15-T16-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-15-T26-A	38.0-50.0	WR22	15	Dual Linear	1.8	FUGP400	-
LB-CH-22-15-T26-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-20-A	33.0-50.0	WR22	20	Linear	1.25	FUGP400	-
LB-CH-22-20-C-2.4F					1.5	2.4mm-F	-
LB-CH-22-20-T02-A	33.0-50.0	WR22	20	Dual Linear	1.6	FUGP400	-
LB-CH-22-20-T02-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-20-T06-A	33.0-43.0	WR22	20	Dual Linear	1.8	FUGP400	-
LB-CH-22-20-T06-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-20-T16-A	36.0-47.0	WR22	20	Dual Linear	1.8	FUGP400	-
LB-CH-22-20-T16-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-20-T26-A	38.0-50.0	WR22	20	Dual Linear	1.8	FUGP400	-
LB-CH-22-20-T26-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-25-A	33.0-50.0	WR22	25	Linear	1.25	FUGP400	-
LB-CH-22-25-C-2.4F					1.5	2.4mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-22-25-T02-A	33.0-50.0	WR22	25	Dual Linear	1.6	FUGP400	-
LB-CH-22-25-T02-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-25-T06-A	33.0-43.0	WR22	25	Dual Linear	1.8	FUGP400	-
LB-CH-22-25-T06-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-25-T16-A	36.0-47.0	WR22	25	Dual Linear	1.8	FUGP400	-
LB-CH-22-25-T16-C-2.4F					1.8	2.4mm-F	-
LB-CH-22-25-T26-A	38.0-50.0	WR22	25	Dual Linear	1.8	FUGP400	-
LB-CH-22-25-T26-C-2.4F					1.8	2.4mm-F	-
LB-CH-19-15-A	40.0-60.0	WR19	15	Linear	1.25	FUGP500	-
LB-CH-19-15-C-2.4F	40.0-50.0				1.5	2.4mm-F	-
LB-CH-19-15-C-1.85F	40.0-60.0				1.5	1.85mm-F	-
LB-CH-19-15-T02-A	40.0-60.0	WR19	15	Dual Linear	1.6	FUGP500	-
LB-CH-19-15-T02-C-2.4F	40.0-50.0				1.8	2.4mm-F	-
LB-CH-19-15-T02-C-1.85F	40.0-60.0				1.8	1.85mm-F	-
LB-CH-19-20-A	40.0-60.0	WR19	20	Linear	1.25	FUGP500	-
LB-CH-19-20-C-2.4F	40.0-50.0				1.5	2.4mm-F	-
LB-CH-19-20-C-1.85F	40.0-60.0				1.5	1.85mm-F	-
LB-CH-19-20-T02-A	40.0-60.0	WR19	20	Dual Linear	1.6	FUGP500	-
LB-CH-19-20-T02-C-2.4F	40.0-50.0				1.6	2.4mm-F	-
LB-CH-19-20-T02-C-1.85F	40.0-60.0				1.6	1.85mm-F	-
LB-CH-19-25-A	40.0-60.0	WR19	25	Linear	1.25	FUGP500	-
LB-CH-19-25-C-2.4F	40.0-50.0				1.5	2.4mm-F	-
LB-CH-19-25-C-1.85F	40.0-60.0				1.5	1.85mm-F	-
LB-CH-19-25-T02-A	40.0-60.0	WR19	25	Dual Linear	1.6	FUGP500	-
LB-CH-19-25-T02-C-2.4F	40.0-50.0				1.6	2.4mm-F	-
LB-CH-19-25-T02-C-1.85F	40.0-60.0				1.6	1.85mm-F	-
LB-CH-15-15-A	50.0-75.0	WR15	15	Linear	1.25	FUGP620	19.1×19.1×47.2
LB-CH-15-15-C-1.85F	50.0-65.0				1.5	1.85mm-F	19.1×26.7×75.2
LB-CH-15-15-C-1.0F	50.0-75.0				1.5	1.0mm-F	19.1×25×72.6
LB-CH-15-15-T02-A	50.0-75.0	WR15	15	Dual Linear	1.5	FUGP620	20.3×20.3×83.7
LB-CH-15-15-T02-C-1.85F	50.0-65.0				1.8	1.85mm-F	47×27.3×111.7
LB-CH-15-15-T02-C-1.0F	50.0-75.0				1.8	1.0mm-F	44.4×25.6×109.1
LB-CH-15-15-T06-A	50.0-66.0	WR15	15	Dual Linear	1.5	FUGP620	20.3×20.3×82.7
LB-CH-15-15-T06-C-1.85F	50.0-65.0				2.0	1.85mm-F	20.3×48.3×110.7
LB-CH-15-15-T06-C-1.0F	50.0-66.0				2.0	1.0mm-F	20.3×45.7×108.1
LB-CH-15-15-T16-A	54.0-71.0	WR15	15	Dual Linear	1.5	FUGP620	20.3×20.3×82.7
LB-CH-15-15-T16-C-1.85F	54.0-65.0				2.0	1.85mm-F	20.3×48.3×110.7
LB-CH-15-15-T16-C-1.0F	54.0-71.0				2.0	1.0mm-F	20.3×45.7×108.1



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-15-15-T26-A	58.0-75.0	WR15	15	Dual Linear	1.5	FUGP620	20.3×20.3×82.7
LB-CH-15-15-T26-C-1.85F	58.0-65.0				2.0	1.85mm-F	20.3×48.3×110.7
LB-CH-15-15-T26-C-1.0F	58.0-75.0				2.0	1.0mm-F	20.3×45.7×108.1
LB-CH-15-20-A	50.0-75.0	WR15	20	Linear	1.25	FUGP620	26.5×26.5×68
LB-CH-15-20-C-1.85F	50.0-65.0				1.5	1.85mm-F	26.5×30.4×96
LB-CH-15-20-C-1.0F	50.0-75.0				1.5	1.0mm-F	26.5×28.7×93.4
LB-CH-15-20-T02-A	50.0-75.0	WR15	20	Dual Linear	1.5	FUGP620	26.5×26.5×104.5
LB-CH-15-20-T02-C-1.85F	50.0-65.0				1.8	1.85mm-F	50×30.4×132.5
LB-CH-15-20-T02-C-1.0F	50.0-75.0				1.8	1.0mm-F	47.5×28.7×129.9
LB-CH-15-20-T06-A	50.0-66.0	WR15	20	Dual Linear	1.5	FUGP620	26.5×26.5×103.5
LB-CH-15-20-T06-C-1.85F	50.0-65.0				2.0	1.85mm-F	26.5×51.4×131.5
LB-CH-15-20-T06-C-1.0F	50.0-66.0				2.0	1.0mm-F	26.5×48.8×128.9
LB-CH-15-20-T16-A	54.0-71.0	WR15	20	Dual Linear	1.5	FUGP620	26.5×26.5×103.5
LB-CH-15-20-T16-C-1.85F	54.0-65.0				2.0	1.85mm-F	26.5×51.4×131.5
LB-CH-15-20-T16-C-1.0F	54.0-71.0				2.0	1.0mm-F	26.5×48.8×128.9
LB-CH-15-20-T26-A	58.0-75.0	WR15	20	Dual Linear	1.5	FUGP620	26.5×26.5×103.5
LB-CH-15-20-T26-C-1.85F	58.0-65.0				2.0	1.85mm-F	26.5×51.4×131.5
LB-CH-15-20-T26-C-1.0F	58.0-75.0				2.0	1.0mm-F	26.5×48.8×128.9
LB-CH-15-25-A	50.0-75.0	WR15	25	Linear	1.15	FUGP620	45.3×45.3×144.8
LB-CH-15-25-C-1.85F	50.0-65.0				1.5	1.85mm-F	45.3×45.3×172.8
LB-CH-15-25-C-1.0F	50.0-75.0				1.5	1.0mm-F	45.3×45.3×170.2
LB-CH-15-25-16A-A	59.0-67.0	WR15	25	Linear	1.25	FUGP620	42.3×42.3×119.2
LB-CH-15-25-R16A-A	59.0-67.0			RHCP	1.25	FUGP620	42.3×42.3×119.2
LB-CH-15-25-L16A-A	59.0-67.0			LHCP	1.25	FUGP620	42.3×42.3×119.2
LB-CH-15-25-T02-A	50.0-75.0	WR15	25	Dual Linear	1.15	FUGP620	45.3×45.3×181.3
LB-CH-15-25-T02-C-1.85F	50.0-65.0				1.5	1.85mm-F	59.5×45.3×209.3
LB-CH-15-25-T02-C-1.0F	50.0-75.0				1.5	1.0mm-F	56.9×45.3×206.7
LB-CH-15-25-T06-A	50.0-66.0	WR15	25	Dual Linear	1.15	FUGP620	45.3×45.3×180.3
LB-CH-15-25-T06-C-1.85F	50.0-65.0				1.5	1.85mm-F	45.3×60.8×208.3
LB-CH-15-25-T06-C-1.0F	50.0-66.0				1.5	1.0mm-F	45.3×58.2×205.7
LB-CH-15-25-T16-A	54.0-71.0	WR15	25	Dual Linear	1.15	FUGP620	45.3×45.3×180.3
LB-CH-15-25-T16-C-1.85F	54.0-65.0				1.5	1.85mm-F	45.3×60.8×208.3
LB-CH-15-25-T16-C-1.0F	54.0-71.0				1.5	1.0mm-F	45.3×58.2×205.7
LB-CH-15-25-T26-A	58.0-75.0	WR15	25	Dual Linear	1.15	FUGP620	45.3×45.3×180.3
LB-CH-15-25-T26-C-1.85F	58.0-65.0				1.5	1.85mm-F	45.3×60.8×208.3
LB-CH-15-25-T26-C-1.0F	58.0-75.0				1.5	1.0mm-F	45.3×58.2×205.7
LB-CH-12-15-A	60.0-90.0	WR12	15	Linear	1.3	FUGP740	-
LB-CH-12-15-C-1.0F					1.6	1.0mm-F	-
LB-CH-12-15-T02-A	60.0-90.0	WR12	15	Dual Linear	1.6	FUGP740	-
LB-CH-12-15-T02-C-1.0F					1.8	1.0mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-12-15-T06-A	60.0-80.0	WR12	15	Dual Linear	1.8	FUGP740	-
LB-CH-12-15-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-15-T16-A	64.0-86.0	WR12	15	Dual Linear	1.8	FUGP740	-
LB-CH-12-15-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-15-T26-A	68.0-90.0	WR12	15	Dual Linear	1.8	FUGP740	-
LB-CH-12-15-T26-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-20-A	60.0-90.0	WR12	20	Linear	1.3	FUGP740	22×22×59.3
LB-CH-12-20-C-1.0F					1.6	1.0mm-F	22×26.4×84.7
LB-CH-12-20-T02-A	60.0-90.0	WR12	20	Dual Linear	1.6	FUGP740	22×22×101.2
LB-CH-12-20-T02-C-1.0F					1.8	1.0mm-F	45.4×26.4×126.6
LB-CH-12-20-T06-A	60.0-80.0	WR12	20	Dual Linear	1.8	FUGP740	-
LB-CH-12-20-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-20-T16-A	64.0-86.0	WR12	20	Dual Linear	1.8	FUGP740	-
LB-CH-12-20-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-20-T26-A	68.0-90.0	WR12	20	Dual Linear	1.8	FUGP740	-
LB-CH-12-20-T26-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-25-A	60.0-90.0	WR12	25	Linear	1.3	FUGP740	-
LB-CH-12-25-C-1.0F					1.6	1.0mm-F	-
LB-CH-12-25-T02-A	60.0-90.0	WR12	25	Dual Linear	1.6	FUGP740	-
LB-CH-12-25-T02-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-25-T06-A	60.0-80.0	WR12	25	Dual Linear	1.8	FUGP740	-
LB-CH-12-25-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-25-T16-A	64.0-86.0	WR12	25	Dual Linear	1.8	FUGP740	-
LB-CH-12-25-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-12-25-T26-A	68.0-90.0	WR12	25	Dual Linear	1.8	FUGP740	-
LB-CH-12-25-T26-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-15-A	75.0-110.0	WR10	15	Linear	1.3	FUGP900	-
LB-CH-10-15-C-1.0F					1.6	1.0mm-F	-
LB-CH-10-15-T02-A	75.0-110.0	WR10	15	Dual Linear	1.6	FUGP900	-
LB-CH-10-15-T02-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-15-T06-A	75.0-99.0	WR10	15	Dual Linear	1.8	FUGP900	-
LB-CH-10-15-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-15-T16-A	80.0-105.0	WR10	15	Dual Linear	1.8	FUGP900	-
LB-CH-10-15-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-15-T26-A	83.0-110.0	WR10	15	Dual Linear	1.8	FUGP900	-
LB-CH-10-15-T26-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-20-A	75.0-110.0	WR10	20	Linear	1.3	FUGP900	-
LB-CH-10-20-C-1.0F					1.6	1.0mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Conical Horn Antenna

Model	Freq.(GHz)	EIA WR	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-CH-10-20-T02-A	75.0-110.0	WR10	20	Dual Linear	1.6	FUGP900	-
LB-CH-10-20-T02-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-20-T06-A	75.0-99.0	WR10	20	Dual Linear	1.8	FUGP900	-
LB-CH-10-20-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-20-T16-A	80.0-105.0	WR10	20	Dual Linear	1.8	FUGP900	-
LB-CH-10-20-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-20-T26-A	83.0-110.0	WR10	20	Dual Linear	1.8	FUGP900	-
LB-CH-10-20-T26-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-25-A	75.0-110.0	WR10	25	Linear	1.3	FUGP900	-
LB-CH-10-25-C-1.0F					1.6	1.0mm-F	-
LB-CH-10-25-T02-A	75.0-110.0	WR10	25	Dual Linear	1.6	FUGP900	-
LB-CH-10-25-T02-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-25-T06-A	75.0-99.0	WR10	25	Dual Linear	1.8	FUGP900	-
LB-CH-10-25-T06-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-25-T16-A	80.0-105.0	WR10	25	Dual Linear	1.8	FUGP900	-
LB-CH-10-25-T16-C-1.0F					1.8	1.0mm-F	-
LB-CH-10-25-T26-A	83.0-110.0	WR10	25	Dual Linear	1.8	FUGP900	-
LB-CH-10-25-T26-C-1.0F					1.8	1.0mm-F	-



pradeep@rfconnector.in

9810138894

www.synergytpl.com

Corrugated Feed Horn Antenna

Include the following Types Corrugated Feed Horn Antennas:

1. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface (Table 1)
2. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Equipped with Absorber (Table 2)
3. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Dual Linear Polarization (Table 3)
4. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Dual Linear Polarization, Equipped with Absorber (Table 4)

LB-ACH series corrugated feed horn antennas are axially corrugated aperture design horn. Those corrugated feed horn antennas have features like: rotationally symmetric radiation pattern, low cross polarization and stable amplitude taper within operating frequency. There are four kinds of polarization options: Linear, Circular(RHCP/LHCP), Dual Linear and Dual Circular for LB-ACH series feed horn antenna. A-INFO's corrugated feed horn antennas can cover from 0.75GHz to 220GHz frequency range. Those feed horn antennas are precisely fabricated to minimize the tolerance of aperture corrugated groove and are ideally suited for Compact Antenna Test Range(CATR), Reflector antennas and other applications. All feed horn antennas have an option of integration with absorber for better gain flatness and radiation pattern.

Model Information

Example Part Number: **LB-ACH -90 -10 -T06 -C -SF -A1**

Product Code

Waveguide Size: WR975 to WR5

EIA WR Size

Gain in dB, Standard gain is 10dB

Polarization options, For Circular and Dual Pol. modules.

Leave blank for Linear Polarization modules.

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-

Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male;

1.0F=1.0mm-Female; 1.0M=1.0mm-Male

Option for Absorber

A1: Standard Absorber

Calibration Option

Far Field Calibration Data with Extra Fee

Feed Horn Antenna Accessories

1. Mounting Bracket
2. Tripod
3. Radome
4. Carrying Case



pradeep@rfconnector.in

9810138894


www.synergypnl.com

Corrugated Feed Horn Antenna


1. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface



A Type, WG Output:

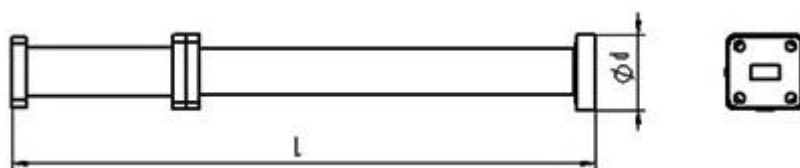

C Type, Coaxial Output:

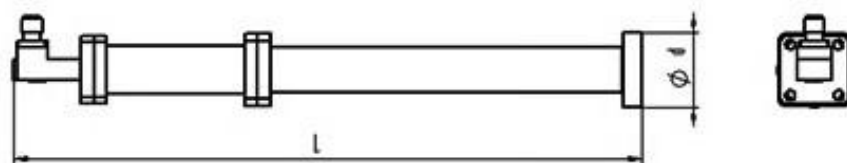

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-975-10-A	0.75-1.12	WR975	10	Linear	1.3	FDP9	-
LB-ACH-975-10-C-NF					1.6	N-F	-
LB-ACH-975-10-C-SF					1.6	SMA-F	-
LB-ACH-975-10-C-7/16F					1.6	7/16DIN-F	-
LB-ACH-770-10-A	0.96-1.45	WR770	10	Linear	1.3	FDP12	-
LB-ACH-770-10-C-NF					1.6	N-F	-
LB-ACH-770-10-C-SF					1.6	SMA-F	-
LB-ACH-770-10-C-7/16F					1.6	7/16 DIN-F	-
LB-ACH-650-10-A	1.12-1.7	WR650	10	Linear	1.3	FDP14	-
LB-ACH-650-10-C-NF					1.6	N-F	-
LB-ACH-650-10-C-SF					1.6	SMA-F	-
LB-ACH-650-10-C-7/16F					1.6	7/16 DIN-F	-
LB-ACH-510-10-A	1.45-2.2	WR510	10	Linear	1.3	FDP18	-
LB-ACH-510-10-C-NF					1.6	N-F	-
LB-ACH-510-10-C-SF					1.6	SMA-F	-
LB-ACH-510-10-C-7/16F					1.6	7/16 DIN-F	-
LB-ACH-430-10-A	1.7-2.6	WR430	10	Linear	1.3	FDP22	-
LB-ACH-430-10-C-NF					1.6	N-F	-
LB-ACH-430-10-C-SF					1.6	SMA-F	-
LB-ACH-430-10-C-7/16F					1.6	7/16 DIN-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-340-10-A	2.2-3.3	WR340	10	Linear	1.3	FDP26	-
LB-ACH-340-10-C-NF					1.6	N-F	-
LB-ACH-340-10-C-SF					1.6	SMA-F	-
LB-ACH-340-10-C-7/16F					1.6	7/16 DIN-F	-
LB-ACH-284-10-A	2.6-3.95	WR284	10	Linear	1.3	FDP32	-
LB-ACH-284-10-C-NF					1.6	N-F	-
LB-ACH-284-10-C-SF					1.6	SMA-F	-
LB-ACH-284-10-C-7/16F					1.6	7/16 DIN-F	-
LB-ACH-229-10-A	3.3-4.9	WR229	10	Linear	1.3	FDP40	-
LB-ACH-229-10-C-NF					1.6	N-F	-
LB-ACH-229-10-C-SF					1.6	SMA-F	-
LB-ACH-229-10-C-TF					1.6	TNC-F	-
LB-ACH-229-10-C-7					1.6	7mm	-
LB-ACH-229-10-C-3.5F					1.6	3.5mm-F	-
LB-ACH-187-10-A	3.95-5.85	WR187	10	Linear	1.3	FDP48	-
LB-ACH-187-10-C-NF					1.6	N-F	-
LB-ACH-187-10-C-SF					1.6	SMA-F	-
LB-ACH-187-10-C-TF					1.6	TNC-F	-
LB-ACH-187-10-C-7					1.6	7mm	-
LB-ACH-187-10-C-3.5F					1.6	3.5mm-F	-
LB-ACH-159-10-A	4.9-7.05	WR159	10	Linear	1.3	FDP58	-
LB-ACH-159-10-C-NF					1.6	N-F	-
LB-ACH-159-10-C-SF					1.6	SMA-F	-
LB-ACH-159-10-C-TF					1.6	TNC-F	-
LB-ACH-159-10-C-7					1.6	7mm	-
LB-ACH-159-10-C-3.5F					1.6	3.5mm-F	-
LB-ACH-137-10-A	5.85-8.2	WR137	10	Linear	1.3	FDP70	-
LB-ACH-137-10-C-NF					1.6	N-F	-
LB-ACH-137-10-C-SF					1.6	SMA-F	-
LB-ACH-137-10-C-TF					1.6	TNC-F	-
LB-ACH-137-10-C-7					1.6	7mm	-
LB-ACH-137-10-C-3.5F					1.6	3.5mm-F	-
LB-ACH-112-10-A	7.05-10.0	WR112	10	Linear	1.3	FBP84	-
LB-ACH-112-10-C-NF					1.6	N-F	-
LB-ACH-112-10-C-SF					1.6	SMA-F	-
LB-ACH-112-10-C-TF					1.6	TNC-F	-
LB-ACH-112-10-C-7					1.6	7mm	-
LB-ACH-112-10-C-3.5F					1.6	3.5mm-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-90-10-A	8.2-12.4	WR90	10	Linear	1.2	FBP100	61.6×61.6×220.2
LB-ACH-90-10-C-SF					1.4	SMA-F	61.6×61.6×258.2
LB-ACH-90-10-C-NF					1.4	N-F	61.6×61.6×258.2
LB-ACH-90-10-C-TF					1.4	TNC-F	61.6×61.6×258.2
LB-ACH-90-10-C-7					1.4	7mm	61.6×61.6×258.2
LB-ACH-90-10-C-3.5F					1.4	3.5mm-F	61.6×61.6×258.2
LB-ACH-75-10-A	10.0-15.0	WR75	10	Linear	1.3	FBP120	-
LB-ACH-75-10-C-SF					1.6	SMA-F	-
LB-ACH-75-10-C-NF					1.6	N-F	-
LB-ACH-75-10-C-TF					1.6	TNC-F	-
LB-ACH-75-10-C-7					1.6	7mm	-
LB-ACH-75-10-C-3.5F					1.6	3.5mm-F	-
LB-ACH-62-10-A	12.4-18.0	WR62	10	Linear	1.2	FBP140	39.2×39.2×183.2
LB-ACH-62-10-C-SF					1.4	SMA-F	39.2×39.2×210.2
LB-ACH-62-10-C-NF					1.4	N-F	39.2×39.2×210.2
LB-ACH-62-10-C-TF					1.4	TNC-F	39.2×39.2×210.2
LB-ACH-62-10-C-7					1.4	7mm	39.2×39.2×210.2
LB-ACH-62-10-C-3.5F					1.4	3.5mm-F	39.2×39.2×210.2
LB-ACH-51-10-A	15.0-22.0	WR51	10	Linear	1.4	FBP180	-
LB-ACH-51-10-C-SF					1.8	SMA-F	-
LB-ACH-51-10-C-3.5F					1.8	3.5mm-F	-
LB-ACH-42-10-A	18.0-26.5.0	WR42	10	Linear	1.2	FBP220	22.4 x 22.4 x 170.2
LB-ACH-42-10-C-SF					1.4	SMA-F	22.4 x 27.8 x 205.2
LB-ACH-42-10-C-KF					1.4	2.92mm(K)-F	22.4 x 27.8 x 205.2
LB-ACH-42-10-C-3.5F					1.4	3.5mm-F	22.4 x 27.8 x 205.2
LB-ACH-34-10-A	22.0-33.0	WR34	10	Linear	1.2	FBP260	23.3×24×170.1
LB-ACH-34-10-C-KF					1.4	2.92mm(K)-F	23.3×27.7×194.1
LB-ACH-28-10-A	26.5-40.0	WR28	10	Linear	1.4	FBP320	28.6×28.6×109.6
LB-ACH-28-10-C-KF					1.8	2.92mm(K)-F	28.6×30.5×133.6
LB-ACH-28-10-C-2.4F					1.8	2.4mm-F	28.6×31.6×133.6
LB-ACH-28-10-62-A	23.5-43.5	WR28	10	Linear	1.4	FBP320	28.6×28.6×109.6
LB-ACH-28-10-62-C-KF	23.5-40.0				1.6	2.92mm(K)-F	28.6×30.5×133.6
LB-ACH-28-10-62-C-2.4F	23.5-43.5				1.6	2.4mm-F	28.6×31.4×133.6
LB-ACH-22-10-A	33.0-50.0	WR22	10	Linear	1.5	FUGP400	28.6×28.6×109.6
LB-ACH-22-10-C-2.4F					2	2.4mm-F	28.6×31.4×133.6
LB-ACH-19-10-A	40.0-60.0	WR19	10	Linear	1.5	FUGP500	28.6×28.6×109.5
LB-ACH-19-10-C-2.4F	40.0-50.0				2	2.4mm-F	28.6×31.9×134.5
LB-ACH-19-10-C-1.85F	40.0-60.0				2	1.85mm-F	28.6×31.3×135.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-15-10-A	50.0-75.0	WR15	10	Linear	1.25	FUGP620	19.1×19.1×99.3
LB-ACH-15-10-C-1.85F	50.0-65.0				1.5	1.85mm-F	19.1×19.1×127.3
LB-ACH-15-10-C-1.0F	50.0-75.0				1.5	1.0mm-F	19.1×19.1×127.3
LB-ACH-12-10-A	60.0-90.0	WR12	10	Linear	1.2	FUGP740	19.1×19.1×99.2
LB-ACH-12-10-C-1.0F	60.0-90.0				1.4	1.0mm-F	19.1×25×124.6
LB-ACH-10-10-A	75.0-110.0	WR10	10	Linear	1.2	FUGP900	19.1×19.1×99.2
LB-ACH-10-10-C-1.0F	75.0-110.0				1.4	1.0mm-F	19.1×25×124.6
LB-ACH-8-10-A	90.0-140.0	WR8	10	Linear	1.6	UG-387/U-M	-
LB-ACH-6-10-A	110.0-170.0	WR6	10	Linear	1.6	UG-387/U-M	-
LB-ACH-5-10-A	140.0-220.0	WR5	10	Linear	1.6	UG-387/U-M	-



pradeep@rfconnector.in



9810138894

www.synergyppl.com



Corrugated Feed Horn Antenna

2. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Equipped with Absorber

A Type, WG Output:



C Type, Coaxial Output:



Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-975-10-A-A1	0.75-1.12	WR975	10	Linear	1.3	FDP9	-
LB-ACH-975-10-C-NF-A1					1.6	N-F	-
LB-ACH-975-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-975-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-770-10-A-A1	0.96-1.45	WR770	10	Linear	1.3	FDP12	-
LB-ACH-770-10-C-NF-A1					1.6	N-F	-
LB-ACH-770-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-770-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-650-10-A-A1	1.12-1.7	WR650	10	Linear	1.3	FDP14	-
LB-ACH-650-10-C-NF-A1					1.6	N-F	-
LB-ACH-650-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-650-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-510-10-A-A1	1.45-2.2	WR510	10	Linear	1.3	FDP18	-
LB-ACH-510-10-C-NF-A1					1.6	N-F	-
LB-ACH-510-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-510-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-430-10-A-A1	1.7-2.6	WR430	10	Linear	1.3	FDP22	-
LB-ACH-430-10-C-NF-A1					1.6	N-F	-
LB-ACH-430-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-430-10-C-7/16F-A1					1.6	7/16DIN-F	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-340-10-A-A1	2.2-3.3	WR340	10	Linear	1.3	FDP26	-
LB-ACH-340-10-C-NF-A1					1.6	N-F	-
LB-ACH-340-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-340-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-284-10-A-A1	2.6-3.95	WR284	10	Linear	1.3	FDP32	-
LB-ACH-284-10-C-NF-A1					1.6	N-F	-
LB-ACH-284-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-284-10-C-7/16F-A1					1.6	7/16DIN-F	-
LB-ACH-229-10-A-A1	3.3-4.9	WR229	10	Linear	1.3	FDP40	-
LB-ACH-229-10-C-NF-A1					1.6	N-F	-
LB-ACH-229-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-229-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-229-10-C-7-A1					1.6	7mm	-
LB-ACH-229-10-C-3.5F-A1					1.6	3.5mm-F	-
LB-ACH-187-10-A-A1	3.95-5.85	WR187	10	Linear	1.3	FDP48	-
LB-ACH-187-10-C-NF-A1					1.6	N-F	-
LB-ACH-187-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-187-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-187-10-C-7-A1					1.6	7mm	-
LB-ACH-187-10-C-3.5F-A1					1.6	3.5mm-F	-
LB-ACH-159-10-A-A1	4.9-7.05	WR159	10	Linear	1.3	FDP58	-
LB-ACH-159-10-C-NF-A1					1.6	N-F	-
LB-ACH-159-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-159-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-159-10-C-7-A1					1.6	7mm	-
LB-ACH-159-10-C-3.5F-A1					1.6	3.5mm-F	-
LB-ACH-137-10-A-A1	5.85-8.2	WR137	10	Linear	1.3	FDP70	-
LB-ACH-137-10-C-NF-A1					1.6	N-F	-
LB-ACH-137-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-137-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-137-10-C-7-A1					1.6	7mm	-
LB-ACH-137-10-C-3.5F-A1					1.6	3.5mm-F	-
LB-ACH-112-10-A-A1	7.05-10.0	WR112	10	Linear	1.3	FBP84	-
LB-ACH-112-10-C-NF-A1					1.6	N-F	-
LB-ACH-112-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-112-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-112-10-C-7-A1					1.6	7mm	-
LB-ACH-112-10-C-3.5F-A1					1.6	3.5mm-F	-

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-90-10-A-A1	8.2-12.4	WR90	10	Linear	1.2	FBP100	266.4×266.4×220.2
LB-ACH-90-10-C-SF-A1					1.4	SMA-F	266.4×266.4×258.2
LB-ACH-90-10-C-NF-A1					1.4	N-F	266.4×266.4×258.2
LB-ACH-90-10-C-TF-A1					1.4	TNC-F	266.4×266.4×258.2
LB-ACH-90-10-C-7-A1					1.4	7mm	266.4×266.4×258.2
LB-ACH-90-10-C-3.5F-A1					1.4	3.5mm-F	266.4×266.4×258.2
LB-ACH-75-10-A-A1	10.0-15.0	WR75	10	Linear	1.3	FBP120	-
LB-ACH-75-10-C-SF-A1					1.6	SMA-F	-
LB-ACH-75-10-C-NF-A1					1.6	N-F	-
LB-ACH-75-10-C-TF-A1					1.6	TNC-F	-
LB-ACH-75-10-C-7-A1					1.6	7mm	-
LB-ACH-75-10-C-3.5F-A1					1.6	3.5mm-F	-
LB-ACH-62-10-A-A1	12.4-18.0	WR62	10	Linear	1.2	FBP140	266.4×266.4×183.2
LB-ACH-62-10-C-SF-A1					1.4	SMA-F	266.4×266.4×210.2
LB-ACH-62-10-C-NF-A1					1.4	N-F	266.4×266.4×210.2
LB-ACH-62-10-C-TF-A1					1.4	TNC-F	266.4×266.4×210.2
LB-ACH-62-10-C-7-A1					1.4	7mm	266.4×266.4×210.2
LB-ACH-62-10-C-3.5F-A1					1.4	3.5mm-F	266.4×266.4×210.2
LB-ACH-51-10-A-A1	15.0-22.0	WR51	10	Linear	1.4	FBP180	-
LB-ACH-51-10-C-SF-A1					1.8	SMA-F	-
LB-ACH-51-10-C-3.5F-A1					1.8	3.5mm-F	-
LB-ACH-42-10-A-A1	18.0-26.5	WR42	10	Linear	1.4	FBP220	-
LB-ACH-42-10-C-SF-A1					1.8	SMA-F	-
LB-ACH-42-10-C-KF-A1					1.8	2.92mm(K)-F	-
LB-ACH-42-10-C-3.5F-A1					1.8	3.5mm-F	-
LB-ACH-34-10-A-A1	22.0-33.0	WR34	10	Linear	1.4	FBP260	266.4×266.4×170.1
LB-ACH-34-10-C-KF-A1					1.8	2.92mm(K)-F	266.4×266.4×194.1
LB-ACH-28-10-A-A1	26.5-40.0	WR28	10	Linear	1.4	FBP320	259×259×109.6
LB-ACH-28-10-C-KF-A1					1.8	2.92mm(K)-F	259×259×133.6
LB-ACH-28-10-C-2.4F-A1					1.8	2.4mm-F	259×259×133.6
LB-ACH-28-10-62-A-A1	23.5-43.5	WR28	10	Linear	1.4	FBP320	259×259×109.6
LB-ACH-28-10-62-C-KF-A1	23.5-40.0				1.8	2.92mm(K)-F	259×259×133.2
LB-ACH-28-10-62-C-2.4F-A1	23.5-43.5				1.8	2.4mm-F	259×259×133.2
LB-ACH-22-10-A-A1	33.0-50.0	WR22	10	Linear	1.5	FUGP400	259×259×109.6
LB-ACH-22-10-C-2.4F-A1					2	2.4mm-F	259×259×133.6
LB-ACH-19-10-A-A1	40.0-60.0	WR19	10	Linear	1.5	FUGP500	259×259×109.5
LB-ACH-19-10-C-2.4F-A1	40.0-50.0				2	2.4mm-F	259×259×134.5
LB-ACH-19-10-C-1.85F-A1	40.0-60.0				2	1.85mm-F	259×259×135.5



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-15-10-A-A1	50.0-75.0	WR15	10	Linear	1.5	FUGP620	259×259×99.5
LB-ACH-15-10-C-1.85F-A1	50.0-65.0				2	1.85mm-F	259×259×127.3
LB-ACH-15-10-C-1.0F-A1	50.0-75.0				2	1.0mm-F	259×259×124.7
LB-ACH-12-10-A-A1	60.0-90.0	WR12	10	Linear	1.2	FUGP740	-
LB-ACH-12-10-C-1.0F-A1					1.4	1.0mm-F	-
LB-ACH-10-10-A-A1	75.0-110.0	WR10	10	Linear	1.2	FUGP900	-
LB-ACH-10-10-C-1.0F-A1					1.4	1.0mm-F	-
LB-ACH-8-10-A-A1	90.0-140.0	WR8	10	Linear	1.6	UG-387/U-M	-
LB-ACH-6-10-A-A1	110.0-170.0	WR6	10	Linear	1.6	UG-387/U-M	-
LB-ACH-5-10-A-A1	140.0-220.0	WR5	10	Linear	1.6	UG-387/U-M	-



pradeep@rfconnector.in

9810138894


www.synergyppl.com

Corrugated Feed Horn Antenna


3. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Dual Linear Polarization



A Type, WG Output:

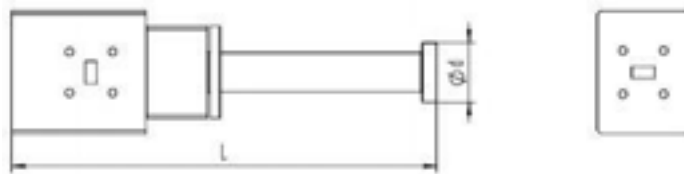

C Type, Coaxial Output:

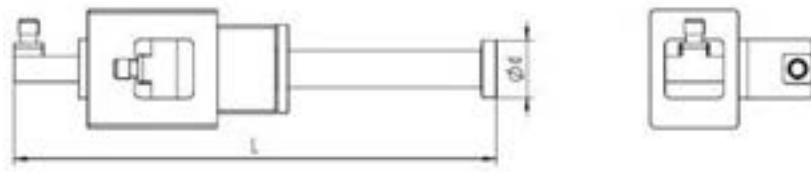

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-159-10-T02-A	4.9-7.05	WR159	10	Dual Linear	1.3	FDP58	102×120.7×445.8
LB-ACH-159-10-T02-C-NF					1.5	N-F	136.9×120.7×495.8
LB-ACH-159-10-T02-C-SF					1.5	SMA-F	136.9×120.7×495.8
LB-ACH-159-10-T02-C-TF					1.5	TNC-F	136.9×120.7×495.8
LB-ACH-159-10-T02-C-7					1.5	7mm	136.9×120.7×495.8
LB-ACH-159-10-T02-C-3.5F					1.5	3.5mm-F	136.9×120.7×495.8
LB-ACH-137-10-T02-A	5.85-8.2	WR137	10	Dual Linear	1.6	FDP70	-
LB-ACH-137-10-T02-C-NF					2	N-F	-
LB-ACH-137-10-T02-C-SF					2	SMA-F	-
LB-ACH-137-10-T02-C-TF					2	TNC-F	-
LB-ACH-137-10-T02-C-7					2	7mm	-
LB-ACH-137-10-T02-C-3.5F					2	3.5mm-F	-
LB-ACH-112-10-T02-A	7.05-10	WR112	10	Dual Linear	1.6	FBP84	-
LB-ACH-112-10-T02-C-NF					2	N-F	-
LB-ACH-112-10-T02-C-SF					2	SMA-F	-
LB-ACH-112-10-T02-C-TF					2	TNC-F	-
LB-ACH-112-10-T02-C-7					2	7mm	-
LB-ACH-112-10-T02-C-3.5F					2	3.5mm-F	-
LB-ACH-112-10-T52-A	6.0-12.4	WR112	10	Dual Linear	1.8	FBP84	89.1 x 96.0 x 479.8
LB-ACH-112-10-T52-C-SF					1.8	SMA-F	129.1 x 96.0 x 519.8



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-90-10-T02-A	8.2-12.4	WR90	10	Dual Linear	1.6	FBP100	-
LB-ACH-90-10-T02-C-SF					2	SMA-F	-
LB-ACH-90-10-T02-C-NF					2	N-F	-
LB-ACH-90-10-T02-C-TF					2	TNC-F	-
LB-ACH-90-10-T02-C-7					2	7mm	-
LB-ACH-90-10-T02-C-3.5F					2	3.5mm-F	-
LB-ACH-75-10-T02-A	10.0-15.0	WR75	10	Dual Linear	1.6	FBP120	-
LB-ACH-75-10-T02-C-SF					2	SMA-F	-
LB-ACH-75-10-T02-C-NF					2	N-F	-
LB-ACH-75-10-T02-C-TF					2	TNC-F	-
LB-ACH-75-10-T02-C-7					2	7mm	-
LB-ACH-75-10-T02-C-3.5F					2	3.5mm-F	-
LB-ACH-62-10-T02-A	12.4-18.0	WR62	10	Dual Linear	1.5	FBP140	63.2×52.1×261
LB-ACH-62-10-T02-C-SF					1.6	SMA-F	63.2×52.1×261
LB-ACH-62-10-T02-C-NF					1.6	N-F	63.2×52.1×261
LB-ACH-62-10-T02-C-TF					1.6	TNC-F	63.2×52.1×261
LB-ACH-62-10-T02-C-7					1.6	7mm	63.2×52.1×261
LB-ACH-62-10-T02-C-3.5F					1.6	3.5mm-F	63.2×52.1×261
LB-ACH-51-10-T02-A	15.0-22.0	WR51	10	Dual Linear	1.8	FBP180	-
LB-ACH-51-10-T02-C-SF					2.2	SMA-F	-
LB-ACH-51-10-T02-C-3.5F					2.2	3.5mm-F	-
LB-ACH-51-10-T56-A	12.4-26.5	WR51	10	Dual Linear	2	FBP180	52.8 x 61.4 x 269.6
LB-ACH-51-10-T56-C-SF					2	SMA-F	97.3 x 61.4 x 314
LB-ACH-51-10-T56-C-3.5F					2	3.5mm-F	97.3 x 61.4 x 314
LB-ACH-42-10-T02-A	18.0-26.5	WR42	10	Dual Linear	1.5	FBP220	22.4 x 41.9 x 182.8
LB-ACH-42-10-T02-C-SF					1.5	SMA-F	59.1 x 41.9 x 217.9
LB-ACH-42-10-T02-C-KF					1.5	2.92mm(K)-F	59.1 x 41.9 x 217.9
LB-ACH-42-10-T02-C-3.5F					1.5	3.5mm-F	59.1 x 41.9 x 217.9
LB-ACH-34-10-T02-A	22.0-33.0	WR34	10	Dual Linear	1.5	FBP260	22.4×38.1×182.8
LB-ACH-34-10-T02-C-KF					1.5	2.92mm(K)-F	46.4×38.1×206.8
LB-ACH-34-10-T06-A	22.0-29.0	WR34	10	Dual Linear	1.5	FBP260	28.6×28.6×189.2
LB-ACH-34-10-T06-C-KF					1.5	2.92mm(K)-F	30.9×52.6×213.2
LB-ACH-34-10-T16-A	23.8-31.2	WR34	10	Dual Linear	1.5	FBP260	28.6×28.6×189.2
LB-ACH-34-10-T16-C-KF					1.5	2.92mm(K)-F	30.9×52.6×213.2
LB-ACH-34-10-T26-A	25.0-33.0	WR34	10	Dual Linear	1.6	FBP260	28.6×28.6×189.2
LB-ACH-34-10-T26-C-KF					1.6	2.92mm(K)-F	30.9×52.6×213.2
LB-ACH-28-10-T02-A	26.5-40.0	WR28	10	Dual Linear	1.5	FBP320	28.6×38.1×132.5
LB-ACH-28-10-T02-C-KF					1.8	2.92mm(K)-F	52.6×38.1×156.5
LB-ACH-28-10-T02-C-2.4F					1.8	2.4mm-F	52.6×38.1×156.5



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-28-10-T16-A	28.5-38.0	WR28	10	Dual Linear	1.8	FBP320	28.6×28.6×128.6
LB-ACH-28-10-T16-C-KF					1.8	2.92mm(K)-F	28.6×52.6×152.6
LB-ACH-28-10-T16-C-2.4F					1.8	2.4mm-F	28.6×52.6×152.6
LB-ACH-28-10-T26-A	26.0-35.0	WR28	10	Dual Linear	1.8	FBP320	28.6×28.6×130.6
LB-ACH-28-10-T26-C-KF					1.8	2.92mm(K)-F	28.6×52.6×154.6
LB-ACH-28-10-T26-C-2.4F					1.8	2.4mm-F	28.6×52.6×154.6
LB-ACH-28-10-T62-A	23.5-43.5	WR28	10	Dual Linear	1.8	FBP320	28.6×38.1×147.7
LB-ACH-28-10-T62-C-KF	23.5-40.0				2.2	2.92mm(K)-F	52.6×38.1×171.7
LB-ACH-28-10-T62-C-2.4F	23.5-43.5				2.2	2.4mm-F	52.6×38.1×171.7
LB-ACH-28-10-T63-A	23.0-44.0	WR28	10	Dual Linear	2	FBP320	28.6×31.8×135
LB-ACH-28-10-T63-C-KF	23.0-40.0				2	2.92mm(K)-F	51.4×32.6×157.8
LB-ACH-28-10-T63-C-2.4F	23.0-44.0				2	2.4mm-F	51.4×32.6×157.8
LB-ACH-28-10-T68-A	24.0-50.0	WR28	10	Dual Linear	1.8	FBP320	28.6×38.1×142.24
LB-ACH-28-10-T68-C-2.4F					2.2	2.4mm-F	52.2×38.1×165.86
LB-ACH-22-10-T02-A	33.0-50.0	WR22	10	Dual Linear	2	FUGP400	-
LB-ACH-22-10-T02-C-2.4F					2.5	2.4mm-F	-
LB-ACH-19-10-T02-A	40.0-60.0	WR19	10	Dual Linear	2	FUGP500	-
LB-ACH-19-10-T02-C-2.4F	40.0-50.0				2.5	2.4mm-F	-
LB-ACH-19-10-T02-C-1.85F	40.0-60.0				2.5	1.85mm-F	-
LB-ACH-15-10-T02-A	50.0-75.0	WR15	10	Dual Linear	2	FUGP620	20.32×20.32×110.5
LB-ACH-15-10-T02-C-1.85F	50.0-65.0				2.5	1.85mm-F	47×27.3×138.5
LB-ACH-15-10-T02-C-1.0F	50.0-75.0				2.5	1.0mm-F	44.4×25.6×135.9
LB-ACH-15-10-T06-A	50.0-66.0	WR15	10	Dual Linear	2	FUGP620	20.3×20.3×109.5
LB-ACH-15-10-T06-C-1.85F					2.5	1.85mm-F	47×27.3×137.5
LB-ACH-15-10-T06-C-1.0F					2.5	1.0mm-F	44.4×25.6×134.9
LB-ACH-15-10-T16-A	54.0-71.0	WR15	10	Dual Linear	2	FUGP620	20.3×20.3×109.5
LB-ACH-15-10-T16-C-1.85F					2.5	1.85mm-F	47×27.3×137.5
LB-ACH-15-10-T16-C-1.0F					2.5	1.0mm-F	44.4×25.6×134.9
LB-ACH-15-10-T26-A	58.0-75.0	WR15	10	Dual Linear	2	FUGP620	20.3×20.3×109.5
LB-ACH-15-10-T26-C-1.85F					2.5	1.85mm-F	47×27.3×137.5
LB-ACH-15-10-T26-C-1.0F					2.5	1.0mm-F	44.4×25.6×134.9
LB-ACH-12-10-T02-A	60.0-90.0	WR12	10	Dual Linear	1.6	FUGP740	20.3×20.3×114.5
LB-ACH-12-10-T02-C-1.0F					1.8	1.0mm-F	44.6×25.6×139.9
LB-ACH-10-10-T02-A	75.0-110.0	WR10	10	Dual Linear	2	FUGP900	-
LB-ACH-10-10-T02-C-1.0F					2.2	1.0mm-F	-
LB-ACH-8-10-T02-A	90.0-140.0	WR8	10	Dual Linear	2	UG-387/U-M	-
LB-ACH-6-10-T02-A	110.0-170.0	WR6	10	Dual Linear	2	UG-387/U-M	-
LB-ACH-5-10-T02-A	140.0-220.0	WR5	10	Dual Linear	2	UG-387/U-M	-



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894



www.synergyppl.com

Corrugated Feed Horn Antenna



4. Corrugated Feed Horn Antennas with Waveguide and Coaxial Interface, Dual Linear Polarization, Equipped with Absorber



A Type, WG Output:



C Type, Coaxial Output:



Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-137-10-T02-A-A1	5.85-8.2	WR137	10	Dual Linear	1.6	FDP70	-
LB-ACH-137-10-T02-C-NF-A1					2	N-F	-
LB-ACH-137-10-T02-C-SF-A1					2	SMA-F	-
LB-ACH-137-10-T02-C-TF-A1					2	TNC-F	-
LB-ACH-137-10-T02-C-7-A1					2	7mm	-
LB-ACH-137-10-T02-C-3.5F-A1					2	3.5mm-F	-
LB-ACH-112-10-T02-A-A1	7.05-10	WR112	10	Dual Linear	1.6	FBP84	-
LB-ACH-112-10-T02-C-NF-A1					2	N-F	-
LB-ACH-112-10-T02-C-SF-A1					2	SMA-F	-
LB-ACH-112-10-T02-C-TF-A1					2	TNC-F	-
LB-ACH-112-10-T02-C-7-A1					2	7mm	-
LB-ACH-112-10-T02-C-3.5F-A1					2	3.5mm-F	-
LB-ACH-90-10-T02-A-A1	8.2-12.4	WR90	10	Dual Linear	1.6	FBP100	-
LB-ACH-90-10-T02-C-SF-A1					2	SMA-F	-
LB-ACH-90-10-T02-C-NF-A1					2	N-F	-
LB-ACH-90-10-T02-C-TF-A1					2	TNC-F	-
LB-ACH-90-10-T02-C-7-A1					2	7mm	-
LB-ACH-90-10-T02-C-3.5F-A1					2	3.5mm-F	-

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-75-10-T02-A-A1	10.0-15.0	WR75	10	Dual Linear	1.6	FBP120	-
LB-ACH-75-10-T02-C-SF-A1					2	SMA-F	-
LB-ACH-75-10-T02-C-NF-A1					2	N-F	-
LB-ACH-75-10-T02-C-TF-A1					2	TNC-F	-
LB-ACH-75-10-T02-C-7-A1					2	7mm	-
LB-ACH-75-10-T02-C-3.5F-A1					2	3.5mm-F	-
LB-ACH-62-10-T02-A-A1	12.4-18.0	WR62	10	Dual Linear	1.5	FBP140	266.4×266.4×234
LB-ACH-62-10-T02-C-SF-A1					1.6	SMA-F	266.4×266.4×261
LB-ACH-62-10-T02-C-NF-A1					1.6	N-F	266.4×266.4×261
LB-ACH-62-10-T02-C-TF-A1					1.6	TNC-F	266.4×266.4×261
LB-ACH-62-10-T02-C-7-A1					1.6	7mm	266.4×266.4×261
LB-ACH-62-10-T02-C-3.5F-A1					1.6	3.5mm-F	266.4×266.4×261
LB-ACH-51-10-T02-A-A1	15.0-22.0	WR51	10	Dual Linear	1.8	FBP180	-
LB-ACH-51-10-T02-C-SF-A1					2.2	SMA-F	-
LB-ACH-51-10-T02-C-3.5F-A1					2.2	3.5mm-F	-
LB-ACH-42-10-T02-A-A1	18.0-26.5	WR42	10	Dual Linear	1.8	FBP220	-
LB-ACH-42-10-T02-C-SF-A1					2.2	SMA-F	-
LB-ACH-42-10-T02-C-KF-A1					2.2	2.92mm(K)-F	-
LB-ACH-42-10-T02-C-3.5F-A1					2.2	3.5mm-F	-
LB-ACH-34-10-T02-A-A1	22.0-33.0	WR34	10	Dual Linear	1.5	FBP260	266.4×266.4×233.6
LB-ACH-34-10-T02-C-KF-A1					1.5	2.92mm(K)-F	266.4×266.4×257.6
LB-ACH-34-10-T06-A-A1	22.0-29.0	WR34	10	Dual Linear	1.8	FBP260	266.4×266.4×240
LB-ACH-34-10-T06-C-KF-A1					2.2	2.92mm(K)-F	266.4×266.4×265
LB-ACH-34-10-T16-A-A1	23.8-31.2	WR34	10	Dual Linear	1.5	FBP260	266.4×266.4×240
LB-ACH-34-10-T16-C-KF-A1					1.5	2.92mm(K)-F	266.4×266.4×264
LB-ACH-34-10-T26-A-A1	25.0-33.0	WR34	10	Dual Linear	1.6	FBP260	266.4×266.4×240
LB-ACH-34-10-T26-C-KF-A1					1.6	2.92mm(K)-F	266.4×266.4×264
LB-ACH-28-10-T02-A-A1	26.5-40.0	WR28	10	Dual Linear	1.5	FBP320	259×259×164.2
LB-ACH-28-10-T02-C-KF-A1					1.8	2.92mm(K)-F	259×259×188.2
LB-ACH-28-10-T02-C-2.4F-A1					1.8	2.4mm-F	259×259×188.2
LB-ACH-28-10-T06-A-A1	30.0-40.0	WR28	10	Dual Linear	1.8	FBP320	259×259×166.7
LB-ACH-28-10-T06-C-KF-A1					1.8	2.92mm(K)-F	259×258×190.7
LB-ACH-28-10-T06-C-2.4F-A1					1.8	2.4mm-F	259×259×190.3
LB-ACH-28-10-T16-A-A1	28.5-38.0	WR28	10	Dual Linear	1.8	FBP320	259×259×166.7
LB-ACH-28-10-T16-C-KF-A1					1.8	2.92mm(K)-F	259×259×190.7
LB-ACH-28-10-T16-C-2.4F-A1					1.8	2.4mm-F	259×259×190.3



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Corrugated Feed Horn Antenna

Model	Freq.(GHz)	EIA WG	Gain Typ.	Pol.	VSWR Typ.	output	Size (mm)
LB-ACH-28-10-T26-A-A1	26.0-35.0	WR28	10	Dual Linear	1.8	FBP320	259×259×168.7
LB-ACH-28-10-T26-C-KF-A1					1.8	2.92mm(K)-F	259×259×192.7
LB-ACH-28-10-T26-C-2.4F-A1					1.8	2.4mm-F	259×259×192.3
LB-ACH-28-10-T62-A-A1	23.5-43.5	WR28	10	Dual Linear	1.8	FBP320	259×259×185.8
LB-ACH-28-10-T62-C-KF-A1	23.5-40.0				2.2	2.92mm(K)-F	259×259×210.2
LB-ACH-28-10-T62-C-2.4F-A1	23.5-43.5				2.2	2.4mm-F	259×259×209.8
LB-ACH-28-10-T63-A-A1	23.0-44.0	WR28	10	Dual Linear	2	FBP320	259×259×173.1
LB-ACH-28-10-T63-C-KF-A1	23.0-40.0				2	2.92mm(K)-F	259×259×195.9
LB-ACH-28-10-T63-C-2.4F-A1	23.0-44.0				2	2.4mm-F	259×259×195.9
LB-ACH-28-10-T68-A-A1	24.0-50.0	WR28	10	Dual Linear	1.8	FBP320	259×259×180.3
LB-ACH-28-10-T68-C-2.4F-A1					2.2	2.4mm-F	259×259×204
LB-ACH-22-10-T02-A-A1	33.0-50.0	WR22	10	Dual Linear	2	FUGP400	259×259×165.4
LB-ACH-22-10-T02-C-2.4F-A1					2.5	2.4mm-F	259×259×189.4
LB-ACH-19-10-T02-A-A1	40.0-60.0	WR19	10	Dual Linear	2	FUGP500	259×259×165.4
LB-ACH-19-10-T02-C-2.4F-A1	40.0-50.0				2.5	2.4mm-F	259×259×190.4
LB-ACH-19-10-T02-C-1.85F-A1	40.0-60.0				2.5	1.85mm-F	259×259×191.4
LB-ACH-15-10-T02-A-A1	50.0-75.0	WR15	10	Dual Linear	2	FUGP620	259×259×138.4
LB-ACH-15-10-T02-C-1.85F-A1	50.0-65.0				2.5	1.85mm-F	259×259×166.4
LB-ACH-15-10-T02-C-1.0F-A1	50.0-75.0				2.5	1.0mm-F	259×259×163.8
LB-ACH-15-10-T06-A-A1	50.0-66.0	WR15	10	Dual Linear	2	FUGP620	259×259×137.4
LB-ACH-15-10-T06-C-1.85F-A1					2.5	1.85mm-F	259×259×165.4
LB-ACH-15-10-T06-C-1.0F-A1					2.5	1.0mm-F	259×259×162.8
LB-ACH-15-10-T16-A-A1	54.0-71.0	WR15	10	Dual Linear	2	FUGP620	259×259×137.4
LB-ACH-15-10-T16-C-1.85F-A1					2.5	1.85mm-F	259×259×165.4
LB-ACH-15-10-T16-C-1.0F-A1					2.5	1.0mm-F	259×259×162.8
LB-ACH-15-10-T26-A-A1	58.0-75.0	WR15	10	Dual Linear	2	FUGP620	259×259×137.4
LB-ACH-15-10-T26-C-1.85F-A1					2.5	1.85mm-F	259×259×165.4
LB-ACH-15-10-T26-C-1.0F-A1					2.5	1.0mm-F	259×259×162.8
LB-ACH-12-10-T02-A-A1	60.0-90.0	WR12	10	Dual Linear	2	FUGP740	259×259×142.4
LB-ACH-12-10-T02-C-1.0F-A1	60.0-90.0	WR12	10	Dual Linear	2.2	1.0mm-F	259×259×167.8
LB-ACH-10-10-T02-A-A1	75.0-110.0	WR10	10	Dual Linear	2	FUGP900	259×259×141.2
LB-ACH-10-10-T02-C-1.0F-A1	75.0-110.0	WR10	10	Dual Linear	2.2	1.0mm-F	259×259×166.6
LB-ACH-8-10-T02-A-A1	90.0-140.0	WR8	10	Dual Linear	2	UG-387/U-M	-
LB-ACH-6-10-T02-A-A1	110.0-170.0	WR6	10	Dual Linear	2	UG-387/U-M	-
LB-ACH-5-10-T02-A-A1	140.0-220.0	WR5	10	Dual Linear	2	UG-387/U-M	-



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Lens Horn Antenna

Lens Horn Antenna



● Applications Include:

MVDS(Multipoint Video Distribution Systems)	Point to Point Radio Links
LMDS(Local Multipoint Distribution Services)	Vehicle Anti-collision Radars
Traffic Control Systems	Traffic Tolling Systems
Secure Communications Systems	Short Range Radar
Electro-Magnetic Compatibility(EMC) Measurements	Radiation Monitoring Systems
Compact/Mobile Systems	Dual Polarized Systems

● Features

Models up to 112GHz	Linear, dual and circular polarization
Optional Protective membrane	Rectangular or circular feed
Ideally suited for small and large quantities	Choice of mounting configurations
Customization available	Choice of waveguide to coaxial adapter



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Lens Horn Antenna

Model Information

Example Part Number: LB-CL -112 -10 -C -SF

Product Code

Waveguide Size: WR112 - WR10

Frequency & Gain Code

Figure Type:

-A: Waveguide Output

-C: Coaxial Output. Connector type below needs to be specified

Figure C Connector Type Option:

7/16F=7/16 DIN Female;

NF=N Type-Female; NM=N Type-Male;

SF=SMA-Female; SM=SMA-Male;

3.5F=3.5mm-Female; 3.5M=3.5mm-Male;

KF=2.92mm-Female; KM=2.92mm-Male;

2.4F=2.4mm-Female; 2.4M=2.4mm-Male;

1.85F=1.85mm-Female; 1.85M=1.85mm-Male

Model	Freq. (GHz)	EIA WR	Gain, Typ (dBi)	Pol.	VSWR, Max	output	Mat.	Size (mm)
LB-CL-112-20-A	7.9-8.5	WR112	25.0	Linear	1.5	FBP84	Al	258×258×436.5
LB-CL-112-20-C-NF					1.5	N-F		258×258×476.5
LB-CL-112-20-C-SF					1.5	SMA-F		258×258×476.5
LB-CL-90-70-A	8.2-12.4	WR90	25.0	Linear	1.6	FBP100	Al	249×249×365.6
LB-CL-90-70-C-SF					1.8	SMA-F		249×249×403.6
LB-CL-90-70-C-NF					1.8	N-F		249×249×403.6
LB-CL-90-70-C-TF					1.8	TNC-F		249 ×249×403.6
LB-CL-90-70-C-7					1.8	7mm		249×249×403.6
LB-CL-90-70-C-3.5F					1.8	3.5mm-F		249×249×403.6
LB-CL-42-80-A	21.2-26.5	WR42	34.5	Linear	1.5	FBP220	Al	294×294×343.9
LB-CL-42-80-C-SF					2	SMA-F		294×294×378.9
LB-CL-42-80-C-KF					2	2.92mm-F		294×294×378.9
LB-CL-42-80-C-3.5F					2	3.5mm-F		294×294×378.9
LB-CL-28-60-A	26.5-40.0	WR28	33	Linear	1.3	FBP320	Al	199×199×254.3
LB-CL-28-60-C-KF					1.5	2.92mm-F		199×199×278.3
LB-CL-28-60-C-2.4F					1.5	2.4mm-F		199×199×278.3
LB-CL-15-30-A	50.0-75.0	WR15	34.5	Linear	1.5	FUGP620	Al	125×125×164
LB-CL-15-30-C-1.85F	50.0-65.0				2	1.85mm-F		125×125×192
LB-CL-180400-20-A	18.0-40.0	WRD180	26	Linear	1.8	FPWRD180C24	Al	100 x 100 x 204.2
LB-CL-180400-20-C-2.4F					2	2.4mm-F		100 x 100 x 230.2
LB-CL-180400-20-C-KF					2	2.92mm-F		100 x 100 x 230.2



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Lens Horn Antenna

Spot-Focusing Lens Horn Antenna



The spot-focusing lens horn antenna uses phase correction to achieve excellent focusing performance with minimum antenna size, so that the beams converge at the designed focus to form a focal spot. It supports both linear and circular polarized waveforms, and the focal length and spot size can be customized. The spot-focusing lens horn antennas are especially useful when focusing beam is required with short focal length. When the focal spots of the two spot-focusing lens antennas are coincident, the transmission loss between the two antennas is minimal. Therefore, these antennas are widely used in the field of free-space method material characterization testing to study the microwave transmission and reflection properties of target substances.

Model Information					
Example Part Number:		LB-CLS	-90	-10	-C -SF
Product Code					
Waveguide Size: WR90 - WR15					
Frequency & Gain Code					
Figure Type: -A:Waveguide Output -C:Coaxial Output. Connector type below needs to be specified					
Figure C Connector Type Option: 7/16F=7/16 DIN Female; NF=N Type-Female; NM=N Type-Male; SF=SMA-Female; SM=SMA-Male; 3.5F=3.5mm-Female; 3.5M=3.5mm-Male; KF=2.92mm-Female; KM=2.92mm-Male; 2.4F=2.4mm-Female; 2.4M=2.4mm-Male; 1.85F=1.85mm-Female; 1.85M=1.85mm-Male; 1.0F=1.0mm-Female; 1.0M=1.0mm-Male					

Testing Track(The track can hold two antennas of the same type, either lens horn antenna or focusing lens horn antenna.)




pradeep@rfconnector.in

9810138894

www.synergyppl.com

Lens Horn Antenna

(This is GR-01E.)

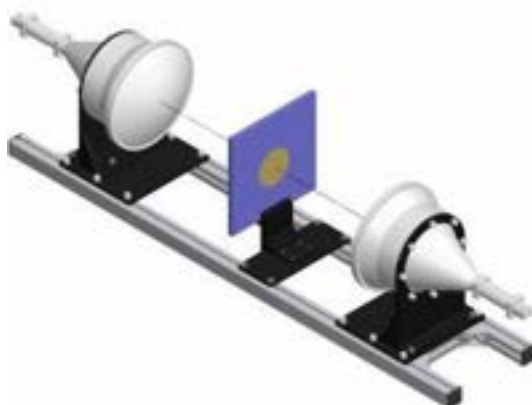

Model	EIA WR	Freq.(GHz)	Pol.	Focal Length	Spot Size	VSWR, Typ	output	Size (mm)
LB-CLS-90-30-10-A	WR90	8.2-12.4	Linear	300	60	1.50	FBP100	-
LB-CLS-90-30-10-C-SF						2.00	SMA-F	-
LB-CLS-90-30-10-C-NF						2.00	N-F	-
LB-CLS-90-30-10-C-TF						2.00	TNC-F	-
LB-CLS-90-30-10-C-7						2.00	7mm	-
LB-CLS-90-30-10-C-3.5F						2.00	3.5mm-F	-
LB-CLS-90-70-10-A	WR90	8.2-12.4	Linear	300	55	1.50	FBP100	249×249×404.5
LB-CLS-90-70-10-C-SF						1.50	SMA-F	249×249×442.5
LB-CLS-90-70-10-C-NF						1.50	N-F	249×249×442.5
LB-CLS-90-70-10-C-TF						1.50	TNC-F	249×249×442.5
LB-CLS-90-70-10-C-7						1.50	7mm	249×249×442.5
LB-CLS-90-70-10-C-3.5F						1.50	3.5mm-F	249×249×442.5
LB-CLS-90-70-50-A	WR90	8.2-12.4	Linear	350	90	1.60	FBP100	249×249×378.6
LB-CLS-90-70-50-C-SF						1.80	SMA-F	249×249×416.6
LB-CLS-90-70-50-C-NF						1.80	N-F	249×249×416.6
LB-CLS-90-70-50-C-TF						1.80	TNC-F	249×249×416.6
LB-CLS-90-70-50-C-7						1.80	7mm	249×249×416.6
LB-CLS-90-70-50-C-3.5F						1.80	3.5mm-F	249×249×416.6



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Lens Horn Antenna

Model	EIA WR	Freq. (GHz)	Pol.	Focal Length	Spot Size	VSWR, Typ	output	Size (mm)
LB-CLS-28-60-10-A	WR28	26.5-40.0	Linear	270	25	1.25	FBP320	199×199×285.3
LB-CLS-28-60-10-C-KF						1.50	2.92mm-F	199×199×309.3
LB-CLS-28-60-10-C-2.4F						1.50	2.4mm-F	199×199×309.3
LB-CLS-28-60-20-A	WR28	26.5-40.0	Linear	150	20	1.25	FBP320	-
LB-CLS-28-60-20-C-KF						1.50	2.92mm-F	-
LB-CLS-28-60-20-C-2.4F						1.50	2.4mm-F	-
LB-CLS-28-70-20-A	WR28	26.5-40.0	Linear	220	11	1.25	FBP320	249×249×379.8
LB-CLS-28-70-20-C-KF						1.5	2.92mm-F	249×249×403.8
LB-CLS-28-70-20-C-2.4F						1.5	2.4mm-F	249×249×403.8
LB-CLS-19-40-10-A	WR19	40.0-60.0	Linear	100	15	1.50	FUGP500	-
LB-CLS-19-40-10-C-2.4F		40.0-60.0				2.00	2.4mm-F	-
LB-CLS-19-40-10-C-1.85F		40.0-60.0				2.00	1.85mm-F	-
LB-CLS-15-30-10-A	WR15	50.0-75.0	Linear	260	20	1.30	FUGP620	125×125×177
LB-CLS-15-30-10-C-1.85F		50.0-65.0				1.80	1.85mm-F	125×125×202.4
LB-CLS-15-30-10-C-1.0F		50.0-75.0				1.80	1.0mm-F	125×125×202.4
LB-CLS-12-18-10-A	WR12	60.0-90.0	Linear	210	22	1.50	FUGP740	85×85×125.7
LB-CLS-12-18-10-C-1.0F						1.80	1.0mm-F	85×85×151.1
LB-CLS-12-30-10-A	WR12	60.0-90.0	Linear	170	20	1.50	FUGP740	-
LB-CLS-12-30-10-C-1.0F						1.80	1.0mm-F	-
LB-CLS-75180-70-10-A	WRD750	7.5-18.0	Linear	320	50	2.20	FPWRD750D24	249×249×531.5
LB-CLS-75180-70-10-C-SF						2.20	SMA-F	249×249×563.2
LB-CLS-75180-70-10-C-NF						2.20	N-F	249×249×563.2
LB-CLS-75180-70-50-A	WRD750	7.5-18.0	Linear	440	75	1.80	FPWRD750D24	249×249×505.6
LB-CLS-75180-70-50-C-SF						1.80	SMA-F	249×249×537.3
LB-CLS-75180-70-50-C-NF						1.80	N-F	249×249×537.3



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Cassegrain

Model	Freq.(GHz)	EIA WR	Gain Typ (dBi)	Pol.	VSWR, Typ	output	Reflector Antenna Size (mm)	Size (mm)
KSC-15-20-A	50.0-75.0	WR15	38	Linear	1.2	FUGP620	228.6	248×248×141.7
KSC-15-20-ASPO			38		1.2	FUGP620	228.6	276×276×154.5
KSC-15-20-C-1.0F			38		1.2	1.0mm-F	228.6	248×248×167.1
KSC-15-20-C-1.85F			38		1.2	1.85mm-F	228.6	248×248×169.7
KSC-15-30-A	50.0-75.0	WR15	41	Linear	1.2	FUGP620	304.8	326.2×326.2×171.8
KSC-15-30-C-1.0F	50.0-75.0		41		1.2	1.0mm-F	304.8	326.2×326.2×197.2
KSC-15-30-C-1.85F	50.0-65.0		41		1.2	1.85mm-F	304.8	326.2×326.2×199.8
KSC-15-40-A	50.0-65.0	WR15	45	Linear	1.2	FUGP620	457.2	482.2×482.2×232.2
KSC-15-40-C-1.0F			45		1.2	1.0mm-F	457.2	482.2×482.2×257.6
KSC-15-40-C-1.85F			45		1.2	1.85mm-F	457.2	482.2×482.2×260.2
KSC-42-40-A	18.0-26.5	WR42	35	Linear	1.3	FBP220	457.2	482.2×482.2×257.3
KSC-42-40-C-KF			35		1.4	2.92mm-F	457.2	482.2×482.2×292.3
KSC-42-40-C-SF			35		1.4	SMA-F	457.2	482.2×482.2×292.3



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Cavity Backed Spiral Antenna

Cavity Backed Spiral Antenna



2-18GHz Spiral Antenn with Fiberglass Radome, P/N:LX-20180-FR.

Our LX series cavity backed spirals are broadband antennas designed for EMC, surveillance, direction finding, telemetry, and flush mounted airborne applications. These spirals can be used as a separate component antenna or as broadband feeds for reflector type dish antennas.

ALL LX series spiral antennas exhibit an excellent impedance match and radiation pattern control over the broad operating bands in a compact and lightweight package. These spirals are ideally suited for amplitude matching and phase or gain tracking. The unit-to-unit uniformity and frequency independent performance is ideal for airborne monitoring receiving systems. ALL cavity backed spirals are available in RHCP or LHCP. These spirals have been designed to operate in a harsh environment and meet the extremes of the Surroundings Specification.

Also we provide specific frequency spirals antennas according to customers' requirement.

Polarization:

LHCP (Left-Hand Circular Polarization)

RHCP (Right-Hand Circular Polarization)

Note: Customized connector type is available.



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Cavity Backed Spiral Antenna

Model	Freq.(GHz)	Pol.	Gain, Typ (dBic)	Axial Ratio, Max (dB)	VSWR, Typ	Connector	Mat.	Size (mm)
LX-520_LHCP	0.5-2.0	LHCP	-6.00	3.0	1.5	SMA-F	Al	Φ 238×102.6
LX-520_LHCPSP0								Φ 248×106.6
LX-520_RHCP		RHCP						Φ 238×102.6
LX-520_RHCPSP0								Φ 248×106.6
LX-840_LHCP	0.8-4.0	LHCP	0.00	3.0	1.5	SMA-F	Al	Φ 154×85.4
LX-840_LHCPSP0								Φ 165×89.4
LX-840_RHCP		RHCP						Φ 154×85.4
LX-840_RHCPSP0								Φ 165×89.4
LX-880_LHCP	0.8-8.0	LHCP	0.00	3.5	1.5	SMA-F	Al	Φ 154×85.4
LX-880_LHCPSP0								Φ 165×89.4
LX-880_RHCP		RHCP						Φ 154×85.4
LX-880_RHCPSP0								Φ 165×89.4
LX-1080_LHCP	1.0-8.0	LHCP	2.00	3.0	1.5	SMA-F	Al	Φ 120×89.4
LX-1080_LHCPSP0								Φ 132×95.4
LX-1080_RHCP		RHCP						Φ 120×89.4
LX-1080_RHCPSP0								Φ 132×95.4
LX-10180_LHCP	1.0-18.0	LHCP	4.00	3.0	2.0	SMA-F	Al	Φ 120×89.4
LX-10180_LHCPSP0								Φ 132×95.4
LX-10180_RHCP		RHCP						Φ 120×89.4
LX-10180_RHCPSP0								Φ 132×95.4
LX-2080_LHCP	2.0-8.0	LHCP	0.00	4.0	2.0	SMA-F	Al	Φ 60.6×49.4
LX-2080_LHCPSP0								Φ 70.6×53.4
LX-2080_RHCP		RHCP						Φ 60.6×49.4
LX-2080_RHCPSP0								Φ 70.6×53.4
LX-2080SA_LHCP	2.0-8.0	LHCP	0.00	3.0	2.0	SMA-F	Al	Φ 55×49.4
LX-2080SA_LHCPSP0								Φ 65×53.4
LX-2080SA_RHCP		RHCP						Φ 55×49.4
LX-2080SA_RHCPSP0								Φ 65×53.4
LX-20180_LHCP	2.0-18.0	LHCP	0.00	3.5	2.0	SMA-F	Al	Φ 60.6×49.4
LX-20180_LHCPSP0								Φ 70.6×53.4
LX-20180_RHCP		RHCP						Φ 60.6×49.4
LX-20180_RHCPSP0								Φ 70.6×53.4



pradeep@rfconnector.in

9810138894

www.synergysgtpl.com

Cavity Backed Spiral Antenna

Model	Freq.(GHz)	Pol.	Gain, Typ (dBic)	Axial Ratio , Max (dB)	VSW R, Typ	Connector	Mat.	Size (mm)
LX-20180-FR_LHCP	2.0-18.0	LHCP	2.00	3.0	2.0	SMA-F	Al	Φ 66×79.4
LX-20180-FR_LHCPSPO								Φ 66×79.4
LX-20180-FR_RHCP		RHCP						Φ 66×79.4
LX-20180-FR_RHCPSPO								Φ 66×79.4
LX-20180SA_LHCP	2.0-18.0	LHCP	0.00	4.0	2.0	SMA-F	Al	Φ 55×49.4
LX-20180SA_LHCPSPO								Φ 65×53.4
LX-20180SA_RHCP		RHCP						Φ 55×49.4
LX-20180SA_RHCPSPO								Φ 65×53.4
LX-4080_LHCP	4.0-8.0	LHCP	2.00	3.0	1.5	SMA-F	Al	Φ 37.5×49.4
LX-4080_LHCPSPO								Φ 43.5×50.9
LX-4080_RHCP		RHCP						Φ 37.5×49.4
LX-4080_RHCPSPO								Φ 43.5×50.9
LX-40180_LHCP	4.0-18.0	LHCP	3.00	3.5	2.0	SMA-F	Al	Φ 37.5×49.4
LX-40180_LHCPSPO								Φ 43.5×50.9
LX-40180_RHCP		RHCP						Φ 37.5×49.4
LX-40180_RHCPSPO								Φ 43.5×50.9
LX-60180_LHCP	6.0-18.0	LHCP	4.00	5.0	2.0	SMA-F	Al	Φ 25×49.4
LX-60180_LHCPSPO								Φ 31×52.4
LX-60180_RHCP		RHCP						Φ 25×49.4
LX-60180_RHCPSPO								Φ 31×52.4
LX-80180_LHCP	8.0-18.0	LHCP	4.00	4.0	2.0	SMA-F	Al	Φ 25×49.4
LX-80180_LHCPSPO								Φ 31×52.4
LX-80180_RHCP		RHCP						Φ 25×49.4
LX-80180_RHCPSPO								Φ 31×52.4
LX-180265_LHCP	18.0-26.5	LHCP	0.00	5.5	1.5	2.92mm-F	Al	Φ 37×37.7
LX-180265_LHCPSPO								Φ 37×40.7
LX-180265_RHCP		RHCP						Φ 37×37.7
LX-180265_RHCPSPO								Φ 37×40.7
LX-180400_LHCP	18.0-40.0	LHCP	2.00	5.5	2.0	2.92mm-F	Al	Φ 37×37.7
LX-180400_LHCPSPO								Φ 37×40.7
LX-180400_RHCP		RHCP						Φ 37×37.7
LX-180400_RHCPSPO								Φ 37×40.7

Conical Log Spiral Antenna



0.2~10GHz log periodic spiral antenna

1. Circular Polarization can help to quickly locate the radiation sources;
2. Wideband;
3. Outside circulation line provides excellent heat dissipation.

Model	Freq.(GHz)	Pol.	Gain, Typ (dBic)	VSWR, Typ	Connector	Mat.	Size (mm)
DS-CP-210_LHCP	0.2-1.0	LHCP	2.00	3.0	N-F	Al	Φ 330×815
DS-CP-210_RHCP	0.2-1.0	RHCP	2.00	3.0	N-F	Al	Φ 330×815
DS-CP-10100_LHCP	1.0-10.0	LHCP	3.00	3.0	N-F	Al	Φ 130×400
DS-CP-10100_RHCP	1.0-10.0	RHCP	3.00	3.0	N-F	Al	Φ 130×400



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Helical Antenna

Helical Antenna



Model	Freq. (GHz)	Pol.	Gain(dBic) Min.	VSWR Max.	Power Handling (W) CW	Connector	Size (mm)
ZLX-6670-10_LHCP	6.6-7.0	LHCP	10	2.0	10	SMA-F	Φ60 x 99.1
ZLX-6670-10_RHCP	6.6-7.0	RHCP	10	2.0	10	SMA-F	Φ60 x 99.1
ZLX-8084-12_LHCP	8.0-8.4	LHCP	12	2.0	10	SMA-F	Φ60 x 119.4
ZLX-8084-12_RHCP	8.0-8.4	RHCP	12	2.0	10	SMA-F	Φ60 x 119.4
ZLX-9010-12_LHCP	9.0-10.0	LHCP	12	2.0	10	SMA-F	Φ60 x 119.4
ZLX-9010-12_RHCP	9.0-10.0	RHCP	12	2.0	10	SMA-F	Φ60 x 119.4



सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



pradeep@rfconnector.in

9810138894

www.synergypcl.com

Microstrip Array Antenna

Microstrip Array Antenna



Microstrip Array Antenna, Up to 77GHz

Model	Freq.(GHz)	Pol.	Gain, Typ (dBi)	VSWR, Max	Connector	Mat.	Size (mm)
MAA-2224	2.2-2.4	Linear	12.0	2.0	SMA-F	Al	244×99×294
MAA-7479	7.4-7.9	Linear	19.0	2.0	SMA-F	Al	146×21.4×176
MAA-935985	9.35-9.85	Linear	20.0	2.0	SMA-F	Al	146×24.4×246
MAA-935985-V	9.35-9.85	Linear	21.0	2.0	SMA-F	Al	126×21.4×246
MAA-935985-C10	9.35-9.85	Linear	20.0	2.0	SMA-F	Al	185×22.9×460
MAA-9600-C41-NF	9.35-9.85	Dual Linear	20.0	2.0	N-F	Al	126×33×392
MAA-9600-C41-SF	9.35-9.85	Dual Linear	20.0	2.0	SMA-F	Al	126×23.5×392
MAA-945975-C10-NF	9.45-9.75	Linear	26.0	2.0	N-F	Al	185×37.5×460
MAA-945975-C10-SF	9.45-9.75	Linear	26.0	2.0	SMA-F	Al	185×22.9×460
MAA-9600-C22	9.45-9.75	Linear	20.0	2.0	SMA-F	Al	91×15.92×436
MAA-9600-C23	9.45-9.75	Linear	20.0	2.0	SMA-F	Al	96×15.92×361
MAA-9600-C24	9.45-9.75	Linear	22.0	2.0	SMA-F	Al	136×18.92×356
MAA-9598-20	9.5-9.8	Linear	20.0	2.0	SMA-F	Al	126×15.92×366
MAA-10000-C21-SF	9.5-10.5	Linear	21.0	2.0	SMA-F	Al	180×22.5×180
MAA-10000-C21-NF	9.5-10.5	Linear	21.0	2.0	N-F	Al	180×32×180
MAA-164595-1	16.45-16.95	Linear	22.0	2.0	SMA-F	Al	106×15×176
MAA-164595-2	16.45-16.95	Linear	22.0	2.0	SMA-F	Al	84×13.16×242
MAA-164595-V	16.45-16.95	Linear	18.0	2.0	SMA-F	Al	59×15×154
MAA-170173-C10	17.05-17.35	Linear	20.0	2.5	SMA-F	Al	108×15.16×332
MAA-240255	24.0-25.5	Linear	22.5	2.0	SMA-F	Al	120×8.8×120

Microstrip Omni Antenna

Microstrip Omni Antenna



Model	Freq.(GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
OA-200-400-0	0.2-0.4	0	Linear	2.0	N-F	Al	160×450×344
OA-200-6000-0	0.2-6.0	0	Linear	2.0	N-F	Al	334×285×334
OA-800-2700-2.5	0.8-2.7	2.5	Linear	2.0	SMA-F	Al	63×141.5×63
OA-800-2700-2.5M	0.8-2.7	2.5	Linear	2.0	SMA-J	Al	63×141.5×63




pradeep@rfconnector.in

9810138894

www.synergypnl.com

Log Periodic Antenna

Log Periodic Antenna

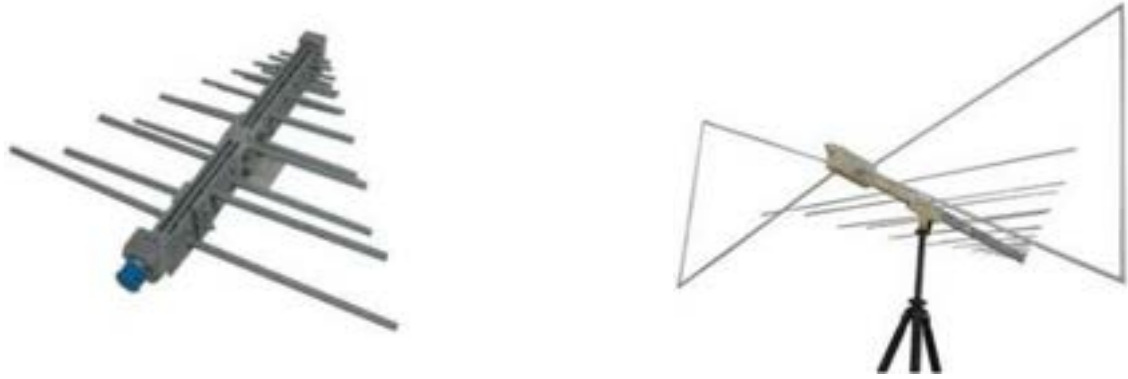

Our DS series antennas are lightweight, medium gain log periodic dipoles designed to transmit and receive signals over a broadband. These antennas are characterized by a high front-to-back ratio, and power gain at all frequency in the band. High quality aluminum construction for a lightweight, high strength antenna will provide years of trouble-free operation.

ALL DS antennas are linearly polarized. Polarization adjustment is possible, in any plane, DS series antennas operating below 300MHz are also supplied in a kit form for compactness in packaging and ease of transportation. Antennas in the kit form assemble easily with minimum tool requirements. Standard tripod will be provided according to customers' requirement, the joint is universal.

Also we provide specific frequency Log Periodic antennas according to customers' requirement.

1. Linear Polarization

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
DS-2100	0.02-1.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-2100C							758×1425×1734
DS-2100E							758×1601×1734
DS-2200	0.02-2.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-2200C							758×1425×1734
DS-2200E							758×1601×1734
DS-2300	0.02-3.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-2300C							758×1425×1734
DS-2300E							758×1601×1734
DS-3100	0.03-1.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-3100C							758×1425×1734
DS-3100E							758×1601×1734
DS-3200	0.03-2.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-3200C							758×1425×1734
DS-3200E							758×1601×1734
DS-3300	0.03-3.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-3300C							758×1425×1734
DS-3300E							758×1601×1734



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Log Periodic Antenna

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
DS-3600	0.03-6.0	6.0	Linear	1.5	N-F	Al	758×1475×1734
DS-3600C							758×1475×1734
DS-3600E							758×1651×1734
DS-4300	0.04-3.0	6.0	Linear	1.5	N-F	Al	758×1425×1734
DS-4300C							758×1425×1734
DS-4300E							758×1601×1734
DS-1040	0.1-0.4	6.0	Linear	1.5	N-F	Al	73×1408×1555
DS-1040C							110×1400×1555
DS-1040E							85×1601×1554.6
DS-10100	0.1-1.0	6.0	Linear	1.5	N-F	Al	73×1408×1555
DS-10100C							110×1400×1555
DS-10100E							85×1601×1554.6
DS-10200	0.1-2.0	6.0	Linear	1.5	N-F	Al	73×1408×1555
DS-10200C							110×1400×1555
DS-10200E							85×1601×1554.6
DS-10200-SPT	0.1-2.0	6.0	Linear	1.5	N-F	Al	1554.6×73.8×1407.9
DS-10300	0.1-3.0	6.0	Linear	1.5	N-F	Al	73×1408×1555
DS-10300C							110×1400×1555
DS-10300E							85×1601×1554.6
DS-10400	0.1-4.0	6.0	Linear	2.0	N-F	Al	73×1408×1555
DS-10400C							110×1400×1555
DS-10400E							85×1601×1554.6
DS-10600	0.1-6.0	6.0	Linear	2.0	N-F	Al	73×1457×1555
DS-10600C							95×1457×1555
DS-10600E							85×1651.3×1554.6
DS-18100	0.18-1.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-18100C							80×737.4×856.6
DS-18100E							52×979×856.6
DS-18200	0.18-2.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-18200C							80×737.4×856.6
DS-18200E							52×979×856.6
DS-18300	0.18-3.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-18300C							80×737.4×856.6
DS-18300E							52×979×856.6
DS-20100	0.2-1.0	6.0	Linear	1.5	N-F	Al	53.1×745.3×856.6
DS-20100C							100×737×856.6
DS-20100E							52×979×856.6
DS-20200	0.2-2.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-20200C							100×737×856.6
DS-20200E							52×979×856.6
DS-20300	0.2-3.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-20300C							100×737×856.6
DS-20300E							52×979×856.6
DS-20400	0.2-4.0	6.0	Linear	2.0	N-F	Al	53.1×745.3×856.6
DS-20400C							100×737×856.6
DS-20400E							52×979×856.6
DS-20600	0.2-6.0	6.0	Linear	2.0	N-F	Al	53.1×795×856.6
DS-20600C							100×787×856.6
DS-20600E							52×1028.8×856.6



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Log Periodic Antenna

Model	Freq.(GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
DS-25100	0.25-1.0	6.0	Linear	1.5	N-F	Al	52×649×739
DS-25100C							100×641×739
DS-25100E							52×883×739
DS-25200	0.25-2.0	6.0	Linear	1.5	N-F	Al	52×649×739
DS-25200C							100×641×739
DS-25200E							52×883×739
DS-25300	0.25-3.0	6.0	Linear	2.0	N-F	Al	52×649×739
DS-25300C							100×641×739
DS-25300E							52×883×739
DS-25100-H	0.25-1.0	8.5	Linear	2.0	N-F	Al	97.1×1512.8×628.4
DS-25200-H	0.25-2.0	8.5	Linear	2.0	N-F	Al	97.1×1512.8×628.4
DS-25300-H	0.25-3.0	8.5	Linear	2.0	N-F	Al	97.1×1512.8×628.4
DS-30100	0.3-1.0	6.0	Linear	1.5	N-F	Al	51×495×550
DS-30100C							100×487×550
DS-30100E							52×729.2×550
DS-30200	0.3-2.0	6.0	Linear	1.5	N-F	Al	51×495×550
DS-30200C							100×487×550
DS-30200E							52×729.2×550
DS-30300	0.3-3.0	6.0	Linear	2.0	N-F	Al	51×495×550
DS-30300C							100×487×550
DS-30300E							52×729.2×550
DS-40200	0.4-2.0	6.0	Linear	1.5	N-F	Al	53×382×410.4
DS-40200C							100×374×410.4
DS-40200E							50×594×410.4
DS-40300	0.4-3.0	6.0	Linear	1.5	N-F	Al	53×382×410.4
DS-40300C							100×374×410.4
DS-40300E							50×594×410.4
DS-50200	0.5-2.0	7.0	Linear	1.5	N-F	Al	51×337×355
DS-50200C							100×329×355
DS-50200E							48×550×355
DS-50300	0.5-3.0	7.0	Linear	1.5	N-F	Al	51×337×355
DS-50300C							100×329×355
DS-50300E							48×550×355
DS-50400	0.5-4.0	7.0	Linear	2.0	N-F	Al	51×337×355
DS-50400C							100×329×355
DS-50400E							48×550×355
DS-50600	0.5-6.0	7.0	Linear	2.0	N-F	Al	78.1×494.8×355
DS-50600SPO							78.1×494.8×355
DS-50600C							120×487.1×355
DS-50600CSPO							79×497×355
DS-50600E							79×688.5×355
DS-50600ESPO							79×497×355
DS-50600LESPO	0.5-6.0	7.0	Linear	2.0	N-F	Al	77×688.5×355
DS-50800	0.5-8.0	7.0	Linear	2.0	N-F	Al	78.1×494.8×355
DS-50800C							120×487.1×355
DS-50800E							79×688.5×355
DS-100600	1.0-6.0	7.0	Linear	2.0	N-F	Al	78.1×494.8×355
DS-100600C							120×487.1×355
DS-100600E							79×688.5×355



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Log Periodic Antenna

2. Dual Linear Polarization

Model	Freq.(GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
DS-SJ-10100	0.1-1.0	7.0	Dual Linear	2.0	N-F	Al	1554.6×1672.1×1554.6
DS-SJ-10100C				2.5			1554.6×1666.6×1554.6
DS-SJ-10100E				2.5			-
DS-SJ-10200	0.1-2.0	7.0	Dual Linear	2.0	N-F	Al	1554.6×1672.1×1554.6
DS-SJ-10200C				2.5			1554.6×1666.6×1554.6
DS-SJ-10200E				2.5			-
DS-SJ-10300	0.1-3.0	7.0	Dual Linear	2.0	N-F	Al	1554.6×1672.1×1554.6
DS-SJ-10300C				2.5			1554.6×1666.6×1554.6
DS-SJ-10300E				2.5			-
DS-SJ-10400	0.1-4.0	7.0	Dual Linear	2.0	N-F	Al	1554.6×1672.1×1554.6
DS-SJ-10400C				2.5			1554.6×1666.6×1554.6
DS-SJ-10400E				2.5			-
DS-SJ-20100	0.2-1.0	7.0	Dual Linear	2.0	N-F	Al	856.6×856.6×1118.2
DS-SJ-20100C				2.5			856.6×856.6×1110.7
DS-SJ-20100E				2.5			-
DS-SJ-20200	0.2-2.0	7.0	Dual Linear	2.0	N-F	Al	856.6×856.6×1118.2
DS-SJ-20200C				2.5			856.6×856.6×1110.7
DS-SJ-20200E				2.5			-
DS-SJ-20300	0.2-3.0	7.0	Dual Linear	2.0	N-F	Al	856.6×856.6×1118.2
DS-SJ-20300C				2.5			856.6×856.6×1110.7
DS-SJ-20300E				2.5			-
DS-SJ-20400	0.2-4.0	7.0	Dual Linear	2.0	N-F	Al	857×857×1120
DS-SJ-20400C				2.5			856.6×856.6×1110.7
DS-SJ-20400E				2.5			-



pradeep@rfconnector.in

9810138894

www.synergyspl.com

Discone-type Antenna

Discone-type Antenna



PZ series discone antenna is a kind of broadband omni-directional linearly polarized antenna. Our discone antenna is designed to transmit and receive signal. Its typical gain is 0~5dBi on the greatest radiation direction. By adding a LNA, it can be used as an active antenna, and the gain can be increased to larger than 10dBi, but it is changed to a received only antenna.

Note: Customized connector type is available.

Model	Freq. (GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Power Handling, CW, (W)	Mat.	Size (mm)
PZ-350/P	0.03-0.5	1.0	Linear	2.5	N-F	300.0	Al	Φ3071×3308
PZ-450/P	0.04-0.5	1.0	Linear	2.5	N-F	300.0	Al	Φ2289×2377
PZ-7100/P	0.07-1.0	3.0	Linear	2.0	N-F	300.0	Al	Φ1379×1187
PZ-850/P	0.08-0.5	0.0	Linear	2.0	N-F	300.0	Al	Φ1247×1162
PZ-1040/P	0.1-0.4	0.0	Linear	2.0	N-F	300.0	Al	Φ1009×1162
PZ-2040/P	0.2-0.4	0.0	Linear	2.5	N-F	300.0	Al	Φ1340×1163
PZ-25100/P	0.25-1.0	1.5	Linear	2.0	N-F	300.0	Al	Φ1340×1163
PZ-80200/P	0.8-2.0	1.0	Linear	2.5	N-F	80.0	Al	Φ110×71
PZ-100800/P	1.0-8.0	4.0	Linear	2.0	SMA-F	80.0	Al	Φ110×71
PZ-1001200/P	1.0-12.0	4.0	Linear	2.0	SMA-F	80.0	Al	Φ110×71
PZ-1001800/P	1.0-18.0	5.0	Linear	2.0	SMA-F	80.0	Al	Φ110×71
PZ-8001800/P	8.0-18.0	5.0	Linear	2.0	SMA-F	80.0	Al	Φ110×71



pradeep@rfconnector.in

9810138894

www.synergypnl.com

Bi-Conical Antenna

Bi-Conical Antenna



SZ series bi-conical antenna is a kind of broadband omni-directional linearly polarized antenna. Our bi-conical antenna is designed to transmit and receive signal. Its typical gain is 0~5dBi on the greatest radiation direction. By adding a LNA, it can be used as an active antenna, and the gain can be increased to larger than 10dBi, but it is changed to a received only antenna.

Note: Customized connector type is available.

Model	Freq.(GHz)	Gain, Typ (dBi)	Pol.	VSWR, Typ	Connector	Mat.	Size (mm)
SZ-10300	0.1-3.0	4.0	Linear	2.0	N-F	Al	Φ1692.3×1692.3
SZ-20300	0.2-3.0	4.0	Linear	2.00	N-F	Al	Φ645×1355
SZ-50300/P	0.5-3.0	0.0	Linear	2.0	N-F	Al	Φ303.17×191.5
SZ-80400/P	0.8-4.0	0.0	Linear	1.5	SMA-F	Al	Φ190×206
SZ-2001800/P	2.0-18.0	4.0	Linear	2.0	SMA-F	Al	Φ123×84
SZ-2002650/P	2.0-26.5	4.0	Linear	2.0	SMA-F	Al	Φ123×84
SZ-2003000/P	2.0-30.0	4.0	Linear	2.5	SMA-F	Al	Φ123×84
SZ-3004000/P	3.0-40.0	3.0	Linear	2.0	2.92mm-F	Al	Φ80×82.8
SZ-3004000/P-KFSPO							Φ80×82.8
SZ-3005000/P	3.0-50.0	4.0	Linear	2.0	2.4mm-F	Al	Φ80×82.8
SZ-3005000/P-2.4FSPO							Φ80×82.8
SZ-4004000/P	4.0-40.0	3.0	Linear	2.0	2.92mm-F	Al	Φ80×82.8
SZ-4004000/P-KFSPO							Φ80×82.8
SZ-4004000/P-2.4F					2.4mm-F		Φ80×82.8
SZ-4004000/P-2.4FSPO							Φ80×82.8
SZ-4005000/P	4.0-50.0	4.0	Linear	2.0	2.4mm-F	Al	Φ80×82.8
SZ-4005000/P-2.4FSPO							Φ80×82.8
SZ-18004000/P	18.0-40.0	5.0	Linear	2.0	2.92mm-F	Al	Φ80×82.8
SZ-18005000/P	18.0-50.0	5.0	Linear	2.0	2.4mm-F	Al	Φ80×82.8
SZ-100011000/P	10.0-110.0	4.0	Linear	2.0	1.0mm-F	Al	Φ50×78.4



pradeep@rfconnector.in

9810138894

www.synergyspl.com

Radar Trihedral Corner Reflector

Radar Trihedral Corner Reflector



The Radar Trihedral Corner Reflectors, with rugged aluminum constructions and plated with gold, are used to reflect radio waves towards the emission source passively and are highly tolerant to misalignment. The Radar Trihedral Corner Reflectors are specially designed for retro-reflection, have high smoothness in the reflection cavity, and are ideally suited for RCS measurement and other applications.

P/N	Edge Length (mm)	Edge Length (inch)	Mat.	N.W.(Kg)	Size (mm)
TCR-18	18	0.7	Al	0.01	15×16.8×18
TCR-35.56	35.56	1.4	Al	0.02	29.8×31.9×35.6
TCR-45.72	45.72	1.8	Al	0.03	36×40.7×45.7
TCR-60.96	60.96	2.4	Al	0.07	48.4×54.3×60.96
TCR-109.2	109.2	4.3	Al	0.20	55×96.2×109.2
TCR-152.4	152.4	6.0	Al	0.39	72.6×133.3×152.4
TCR-203.2	203.2	8.0	Al	0.70	93.3×177.3×203.2
TCR-342.9	342.9	13.5	Al	2.12	156.2×300.3×343.3

Calculated Radar Cross Section and Relative Magnitude



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Antenna Accessories

Antenna Accessories Mounting Bracket

1. Round Type Mounting Bracket



2. L type Mounting Bracket



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Antenna Accessories

3. Stinger Mounting Bracket



4. Plane Type Mounting Bracket



Tripod (For some horn antenna and some other antennas, pls. ask!)

Aluminum Alloy Tripod
(P/N: Tripod_15Kg)

Wooden Tripod
(P/N: 3033HL)

Wooden Tripod
(P/N: 3033QM)



pradeep@rfconnector.in

9810138894

www.synergyppl.com

Antenna Accessories

Radome

1. For some Standard Gain Horn Antennas, pls. ask!
(This is LB-159-10-C-SF with Radome.)



2. For some Spiral Antenna, pls. ask!
(This is LX-20180_RHCP with Radome.)

(This is LX-20180-FR_LHCP with Radome.)



Carrying Case (For all horns.Safe,Easy to carry and Convenient for storage.)

(P/N: Carrying Case LB-OSJ-0460)

(P/N: Carrying Case_LB-75-20-C)





pradeep@rfconnector.in


9810138894

www.synergyppl.com

Antenna Accessories

Testing Track(The track can hold two antennas of the same type, either lens horn antenna or focusing lens horn antenna.)

(This is GR-01E.)

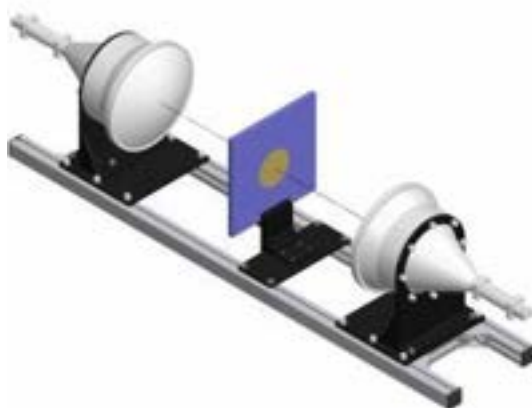

Customized Horn Antenna Accessories are available according to detailed requireme