


SMP Shrouds and Adapters


MALE SHROUDS FOR USE WITH HERMETIC SEALS

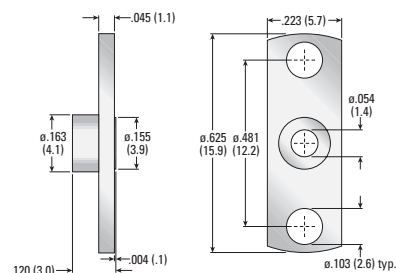

Detent Type	AEP P/N
Full detent	7516-9013-000
Limited detent	7509-9013-000
Smooth bore	7515-9013-000

Body material: Stainless steel

HERMETIC SEAL

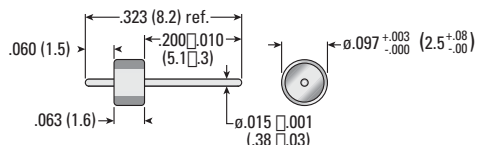

AEP P/N
920-157

MATERIALS:

Outer ring and pin: Kovar

Glass bead: Corning 7070 or equivalent

FINISH:


Outer ring and pin: Gold-plated per MIL-G-45204, type II, grade C, class 1, over nickel per MIL-C-26074, class I, over copper per MIL-C-14550

HERMETICITY:

Leak rate: Less than 1×10^{-8} cc/second


See page 5-8 for hermetic seal installation instructions.

FEMALE-TO-FEMALE STRAIGHT BULLET ADAPTERS FOR USE WITH SHROUDS



AEP P/N
5280-1502-000

Body material: Beryllium copper

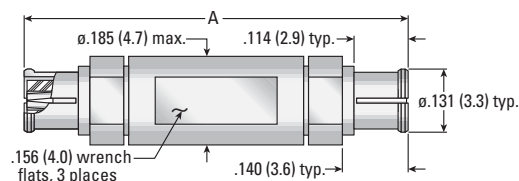

A	AEP P/N
0.805 (20.4)	5280-1502-001
1.142 (29.0)	5280-1502-002

Body material: Beryllium copper