


SMP Cable Connectors

SMP

STRAIGHT MALE CABLE CONNECTOR (DIRECT SOLDER FOR SEMI-RIGID CABLE)

Captive Contact, for 0.086" semi-rigid/0.040" thick panel

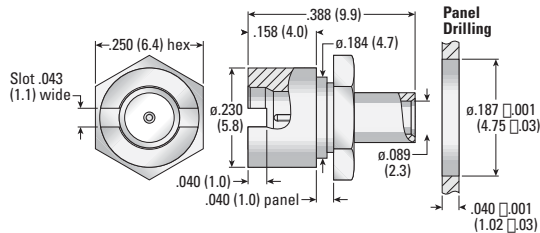


Detent Type	AEP P/N
Full detent	7503-1582-010
Limited detent	7506-1582-010
Smooth bore	7502-1582-010

Body material: Beryllium copper

STRAIGHT MALE CABLE CONNECTOR (DIRECT SOLDER FOR SEMI-RIGID CABLE)

Captive Contact, for 0.086" semi-rigid/0.150" thick panel

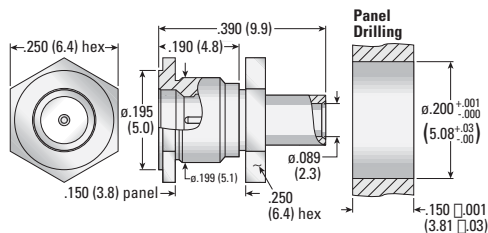


Detent Type	AEP P/N
Full detent	7503-1582-110
Limited detent	7506-1582-110
Smooth bore	7502-1582-110

Body material: Beryllium copper

STRAIGHT MALE CABLE CONNECTOR (CATCHER'S MITT* DIRECT SOLDER FOR SEMI-RIGID CABLE)

Non-Captive Contact, for 0.086" semi-rigid/0.150" thick panel

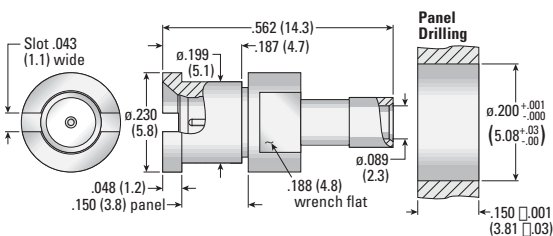

Detent Type	AEP P/N
Full detent	7503-1083-010
Limited detent	7506-1083-010
Smooth bore	7502-1083-010

Body material: Stainless steel

*The "Catcher's Mitt" configuration features a wider-than-standard flare at the mating end, increasing its ability to "capture" a misaligned mating connector and guide it to center for proper mating.

These panel connectors have two-piece bodies; after the rear assembly is inserted through the panel, the front shroud is assembled and tightened with a screwdriver or wrench.

Cable assembly instructions are shipped with each connector.