




SMA

## Semi-Rigid Cable Plugs

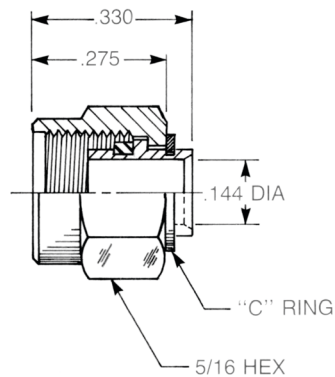


### Straight Plug

- Direct solder attachment
- Retractable coupling nut
- Cable center conductor used as contact

For 0.141" semi-rigid:

**9301-1063-009** (Gold-plated)

**9301-7063-009** (Nickel-plated)

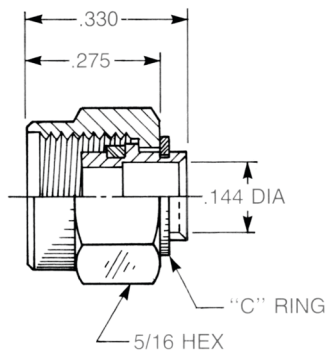


### Straight Plug

- Direct solder attachment
- Retractable coupling nut
- Cable center conductor used as contact
- Stepped body for use in applications requiring frequent mating and unmating

For 0.141" semi rigid:

**9301-1063-109** (gold-plated)

**9301-7063-109** (nickel-plated)



### Straight Plug

- Direct solder attachment
- Provided with contact and insulator
- Non-captive contact
- Short body length allows very tight cable bend in dense packaging applications

For 0.085" semi-rigid:

**9401-1083-210** (Gold-plated)

**9401-7083-210** (Nickel-plated)