




Semi-Rigid Cable Jacks

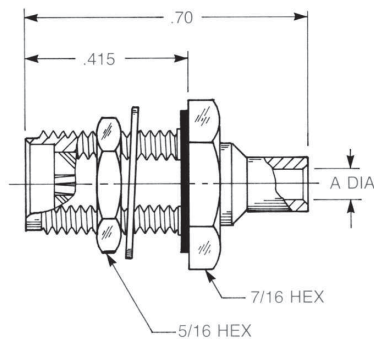

Straight Bulkhead Jack

- Direct solder attachment
- With mounting gasket
- Non-captive contact

For 0.085" semi-rigid (A = 0.089)


9453-1083-010 (Gold-plated)

9453-7083-010 (Nickel-plated)

For 0.141" semi-rigid (A = 0.144):

9453-1083-009 (Gold-plated)

9453-7083-009 (Nickel-plated)

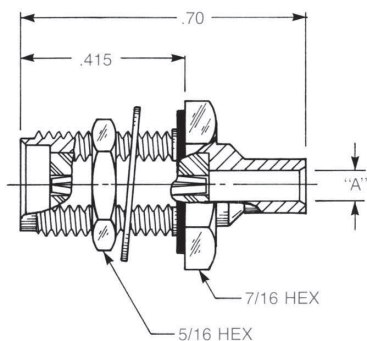

Straight Bulkhead Jack

- Direct solder attachment
- With mounting gasket
- Captive contact for one-step cable assembly

For 0.085" semi-rigid (A = 0.089):


9453-1583-010 (Gold-plated)

9453-7583-010 (Nickel-plated)

For 0.141" semi-rigid (A = 0.144):

9453-1583-009 (Gold-plated)

9453-7583-009 (Nickel-plated)

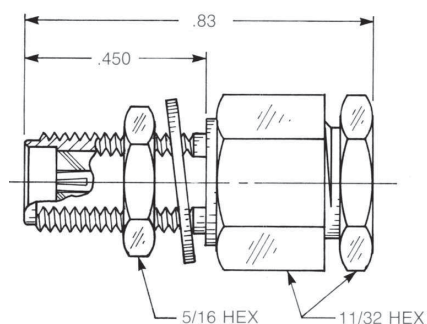

Straight Bulkhead Jack

- Solder clamp attachment
- Captive contact

For 0.085" semi-rigid:


9530-1593-010 (Gold-plated)

9530-9593-010 (Passivated)

For 0.141" semi-rigid:

9530-1593-009 (Gold-plated)

9530-9593-009 (Passivated)

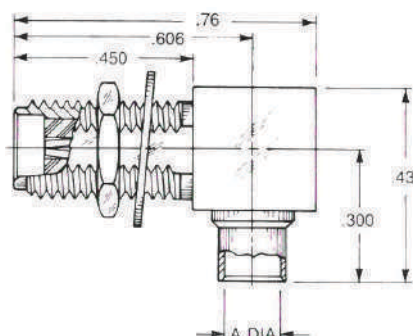

Right Angle Bulkhead Jack

- Direct solder attachment

For 0.085" semi-rigid (A = 0.089):

9613-1563-010 (Gold-plated)

9613-7563-010 (Nickel-plated)

For 0.141" semi-rigid (A = 0.144):

9613-1563-009 (Gold-plated)

9613-7563-009 (Nickel-plated)

Designed for use with 0.125" max thick panel.