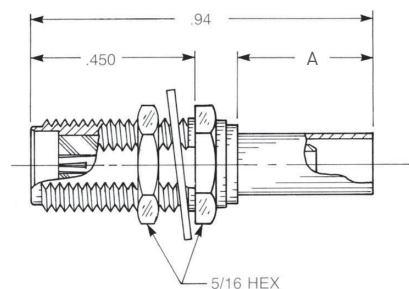




SMA

Flexible Cable Jacks



Straight Bulkhead Jack

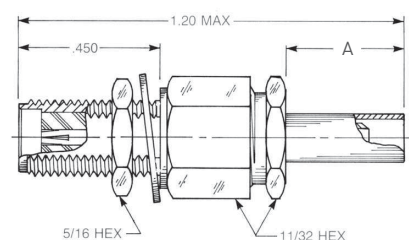
- Non-captive contact

Crimp type:

9030-1023-0XX (Gold-plated)

9030-9023-0XX (Passivated)

Solder type:


9030-1033-0XX (Gold-plated)


Straight Bulkhead Jack

- Captive contact

Crimp type:

9130-1573-0XX (Gold-plated)

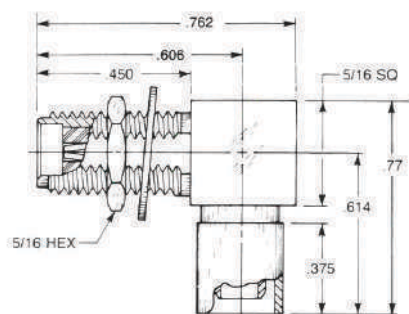
9130-9573-0XX (Passivated)


Straight Bulkhead Jack

- Captive contact

Clamp type:

9230-1553-0XX (Gold-plated)

9230-9553-0XX (Passivated)


Right Angle Bulkhead Jack

Crimp type:

9613-1523-0XX (Gold-plated)

9613-9523-0XX (Passivated)

Substitute XX with the Appropriate Cable Group Below

01	RG142, RG223, M17/60, M17/84, M17/158	04	RG180, RG195, M17/95
02	RG178, RG196, M17/93, M17/169	05	RG178DS, RG196DS
03	RG174, RG179, RG316, M17/113, M17/119, M17/172, M17/173	06	RG58, RG141, RG303, M17/111, M17/155
		19	RG174DS, RG316DS, M17/152, Times RD316

A Dim = 0.303 for cable groups 01, 04 and 06

A Dim = 0.375 for cable groups 02, 03, 05 and 19

Designed for use with 0.125" max thick panel.