




## Knurl Mount

These knurl mount connectors can provide an economical alternative to flange mounted connectors and are especially useful in dense packaging applications.

To ensure retention, these connectors should be used in panels of 0.100" minimum thickness. Gold-plated bodies can be soldered to the panel if necessary, but an absolute minimum of heat should be used to prevent insulator damage.

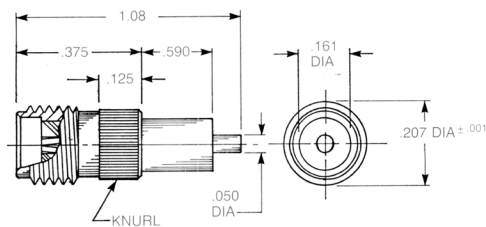

### Straight Jack Receptacle

- Extended contact and insulator

Captive contact:


**9033-1113-000** (Gold-plated)

**9033-9113-000** (Passivated)

Non-captive contact:

**9033-1213-000** (Gold-plated)

**9033-9213-000** (Passivated)

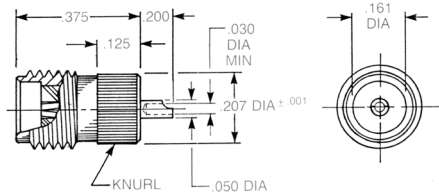


### Straight Jack Receptacle

- Solder pot contact

Captive contact:

**9433-1113-000** (Gold-plated)

**9433-9113-000** (Passivated)

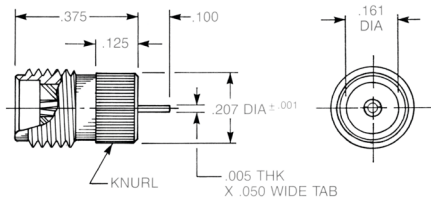

### Straight Jack Receptacle

- Tab contact

Captive contact:


**9133-1113-000** (Gold-plated)

**9133-9113-000** (Passivated)

Non-captive contact:

**9133-1213-000** (Gold-plated)

**9133-9213-000** (Passivated)

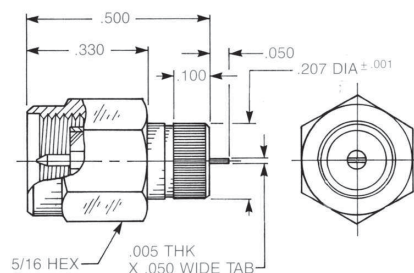

### Straight Plug Receptacle

- Tab Contact

Captive contact:

**9139-1113-000** (Gold-plated)

**9139-9113-000** (Passivated)

Non-captive contact:

**9139-1213-000** (Gold-plated)

**9139-9213-000** (Passivated)

Additional contact and insulator configurations available upon request.