



Hermetic Seal Launchers for 0.020" Diameter Pins

SMA

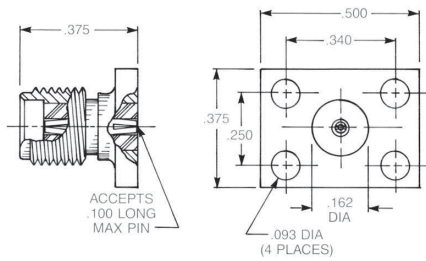

Straight Jack

- Rectangular flange


9507-9113-003
9507-9113-004 (Includes 920-69)


Straight Jack

- Screw-in mounting

9513-9113-009
9513-9113-012 (Includes 920-69)

These connectors require a minimum package wall thickness of 0.250" for proper retention.

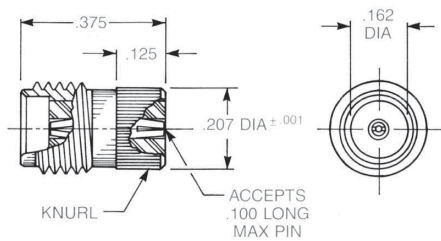


Straight Jack

- Knurl mount

9533-9113-003
9533-9113-002 (Includes 920-69)

These connectors require a minimum package wall thickness of 0.235" for proper retention.

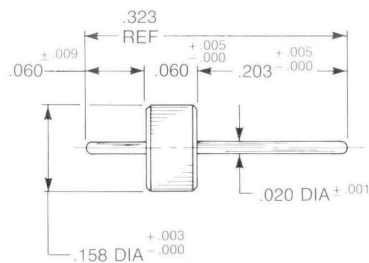

Solder-In Hermetic Seal

P/N 920-56

See page 2-41 for material and finish specifications and mounting dimensions.