



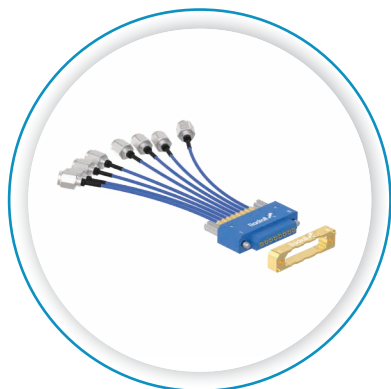

COAXHD70

*Featuring High Frequency,
Exceptional Durability and
Reliable Multi-Port Capabilities*

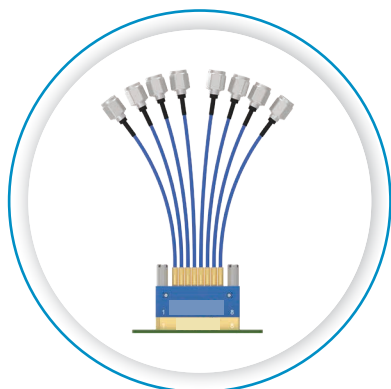

The COAXHD70 family offers a high-density multi-port solution capable of supporting signal transmission up to 70 GHz to further enhance portfolio for the Test & Measurement market.

- Frequency Range: DC to 70 GHz, supporting data rates up to 224 Gbps
- Surface-Mount Technology (SMT) receptacle for PCB mounting
- 8 coaxial contacts with a 3.0 mm pitch
- Solderless, spring-loaded inner and outer coaxial contacts
- Secure plug-to-receptacle connection with two jackscrew locks
- Retention clip keeps each contact securely in place inside the housing, providing stability and reliability
- Allows for individual line replacement
- Available in standard lengths of 152 mm and 305 mm, with custom lengths available
- Tool-free installation for ease of use

FEATURES & BENEFITS

- Data Rate up to 224 Gbps PAM4
- High density
- Repeatability
- RF performance stability through 1,000 mating cycles
- Robust and reliable locking mechanism

APPLICATIONS

- High speed chipset verification
- High speed device verification
- Optical transceiver verification

