

Accessories

CABLE TERMINATIONS

RIGHT ANGLE PCB CABLE TERMINATIONS




FIG. 1




FIG. 2




FIG. 3




FIG. 4

CABLE GROUP	CABLE GROUP DIA.	PART NUMBER	FIG.	DIMENSIONS (MM)			PANEL DRILLING	FINISH	NOTE
				A	B	C/E			
RG178 / RG196	2/50/S	R280 219 000	1	10.70	2.10	1.45	P03	Gold	2 Pins / Solder
		7145-1521-002	2	9.39	9.65	1.01	-		4 Pins / Crimp
RG174 / RG316 / RG179	2.6/50+75/S	R280 220 008	3	10.70	2.90	2.30	P04	Tin Lead	2 Pins / Solder
		R280 294 000	2	16.85	3.25	1.70	P01		4 Pins / Crimp
RG405	.085"	8045-1541-010	4	14.98	3.07	-	-	Gold	4 Pins / Clamp
RG174 / RG316	2.6/50/S	8045-1551-003				-	-		
		8145-1521-003		17.44	3.09	-	P01		4 Pins / Crimp
RG178 / RG196	2/50/S	8145-1521-002				-			
RD316	2.6/50/D	8145-1521-019				3.50			

STRAIGHT PCB CABLE TERMINATIONS




FIG. 1




FIG. 2



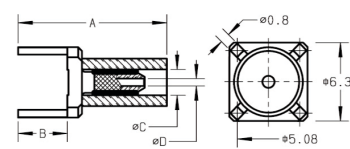


FIG. 3

CABLE GROUP	CABLE GROUP DIA.	PART NUMBER	FIG.	DIMENSIONS (MM)				PANEL DRILLING	FINISH	NOTE
				A	B	C	D			
RG178 / RG196	2/50/S	R280 221 000	1	10.50	3.20	2.70	1.45	P02	Gold	2 Pins / Solder
RG174 / RG316 / RG179	2.6/50 - 2.6/75/S	R280 222 000	2	8.40	3.20	3.15	2.30			2 Pins / Solder
		R280 284 000	3	17.20	4.00	3.25	1.70	P01	Nickel	4 Pins / Crimp

HEATSHRINK SLEEVES



PART NUMBER	B		A	PACKAGING
	BEFORE SHRINKAGE	AFTER SHRINKAGE		
R280 637 030	6.4	3.2	25.4	100
R280 637 040	12	6	45	

Heatshrink sleeves guarantee an IP65 moisture resistance on crimp type models and an IP 67 moisture resistance on clamp type models.