

SMA

HERMETIC RECEPTACLES WITHOUT GLASS BEAD

SCREW-ON TYPE FEMALE RECEPTACLE WITH SLIDING CONTACT

Screw-on receptacles without glass bead provide a lower hermeticity level (10-6atm/cm3/sec). A gasket is provided to guarantee the hermeticity between the receptacle and the package.



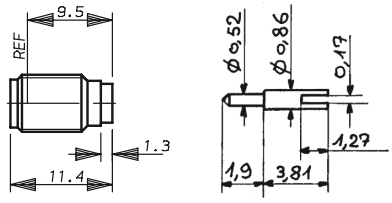

PART NUMBER (GOLD)	PART NUMBER (PASSIVATED)	PANEL DRILLING	CONTACT TYPE
R125 605 300	R125 605 301	P08	Slotted

ADAPTERS

IN SERIES ADAPTERS






FIG. 1




FIG. 2




FIG. 3




FIG. 4




FIG. 5




FIG. 6




FIG. 7




FIG. 8




FIG. 9

PART NUMBER (GOLD)	PART NUMBER (PASSIVATED)	FIG.	DIMENSIONS (MM)		CAPTIVE CENTER CONTACT	PANEL DRILLING	NOTE
			A	B			
R125 703 000	R125 703 001	1	-	-	Yes (4 Indents)	-	Male - Male
R125 704 000	R125 704 001	2	17.5	-		-	Male - Female
R125 705 000	R125 705 001	3	-	-		-	Female - Female
R125 720 000	R125 720 001	4	-	-	Yes (Epoxy)	P06	Bulkhead Female - Female
R125 753 000	R125 753 001	5	-	-	Yes	P08	Bulkhead Hermetically Sealed / Female - Female
R125 771 000	R125 771 001	6	-	-	-	-	Right Angle Male - Female
-	R125 791 501	7	23.3	8.9	Yes (Epoxy)	-	Push-On Male
-	R125 792 501		24.8	11		P07	Push-On Female
-	R125 710 021	8	-	-	Yes (4 Indents)	P06	Female - Female Square Flange Adapter
5909-1103-000	5909-9103-000	9	-	-		-	Bulkhead Female - Female
5916-1103-603	5916-9103-603	2	17.4	-		-	Male - Female
5917-1103-000	5917-9103-000	3	-	-		-	Female - Female
5918-1103-000	5918-9103-000	1	-	-		-	Male - Male
5919-1503-000	5919-9503-000	6	-	-		-	Male - Female / Right Angle
5919-1503-001	5919-9503-001		-	-		-	Male - Male / Right Angle
5919-1503-003	5919-9503-003		-	-		-	Male - Male / Right Angle