BMA

PLUGS AND CONTACTS

STRAIGHT PLUGS, SOLDER TYPE FOR SEMI-RIGID CABLES






FIG. 1




FIG. 2




FIG. 3

CABLE GROUP	CABLE GROUP DIA.	PART NUMBER	FIG.	DIMENSION A (MM)	PANEL DRILLING	BODY	FINISH	CAPTIVE CENTER CONTACT	NOTE
RG405	.085"	R128 052 901	1	17	P01	Stainless Steel	Passivated	Yes (Epoxy)	Crimp Type, Easy Installation
		R128 052 000	2	17.6			Gold		-
		R128 052 827	3			Brass	BBR	Yes (4 Indents)	No O-Ring
RG402	.141"	R128 055 000	2			Stainless Steel	Gold	Yes (Epoxy)	-
		R128 055 827	3			Brass	BBR	Yes (4 Indents)	No O-Ring

STRAIGHT BULKHEAD PLUGS CRIMP TYPE FOR FLEXIBLE CABLE






FIG. 1




FIG. 2




FIG. 3

CABLE GROUP	CABLE GROUP DIA.	PART NUMBER	FIG.	DIMENSION A (MM)	PANEL DRILLING	BODY & FINISH	CAPTIVE CENTER CONTACT	NOTE
RG174 / RG316	2.6/50/S	R128 081 001	1	24.6	P02	Stainless Steel Passivated	Yes (Bard)	Waterproof
		R128 083 001	2	24.2	P01		Yes (Epoxy)	-
		R128 083 827	3			Brass BBR	Yes (4 Indents)	No O-Ring
RD316	2.6/50/D	R128 084 827						
RG142 / RG223 /RG400	5/50/D	R128 088 827						

STRAIGHT CONTACTS SIZE 8 FOR MIL-STD-38999 CONNECTORS SOLDER TYPE



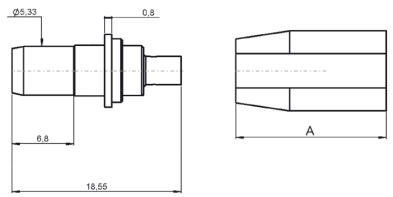


FIG. 1




FIG. 2

CABLE GROUP	CABLE GROUP DIA.	PART NUMBER	BODY & FINISH	FIG.	CAPTIVE CENTER CONTACT	GENDER
RG405	.085"	R128 053 000	Stainless Steel Gold Plated	1	Yes (Epoxy)	Pin
		R128 294 710		2		Socket
RG405	.141"	R128 056 000		1		Pin
		R128 296 710		2		Socket