
SMB

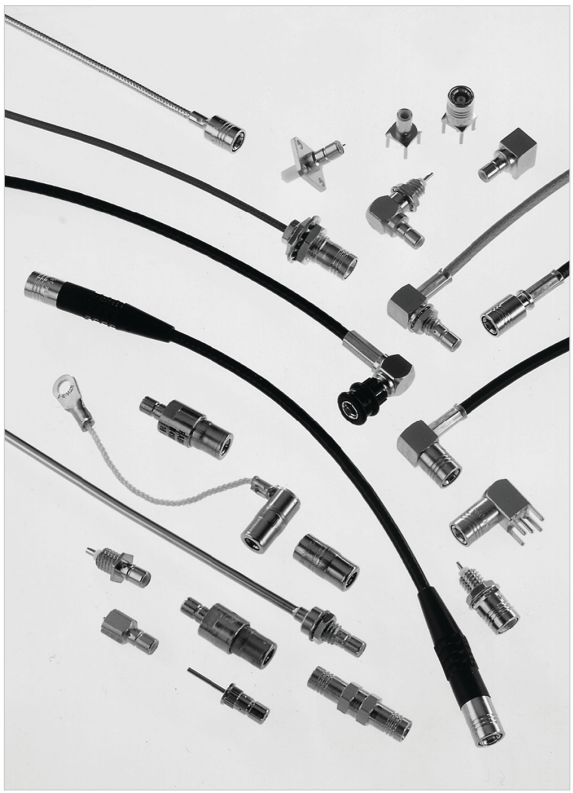

50Ω	DC - 4 GHz

INTRODUCTION

GENERAL

- Subminiature coaxial connectors
- Snap-on coupling
- Plugs have female contacts
- Jacks have male contacts
- Low weight and reduced outline dimensions
- Captive contact (except contrary specification)


APPLICABLE STANDARDS

- SMB series MIL-C-39012
  MIL-C-39012/67-72
- IEC 169-10
- CECC 22130
- BS 9210 N0007


APPLICATIONS

- Mobile communication systems
- Civil and military telecommunications
- Aeronautics
- Automotive

PROFILE

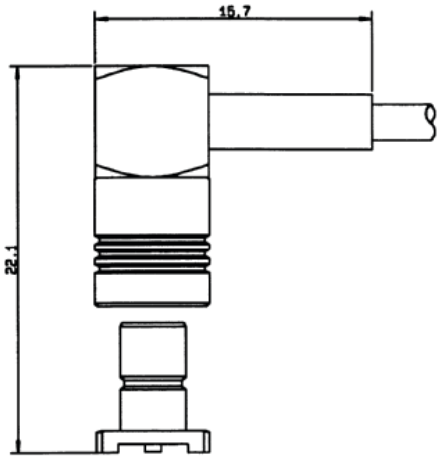

UNMATED

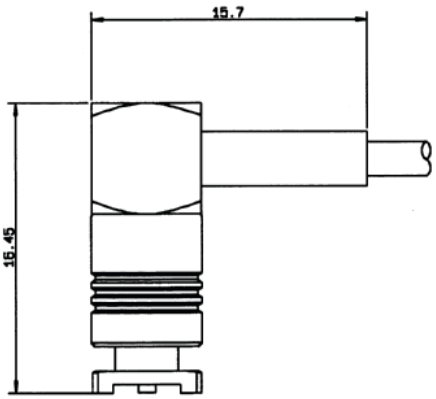

MATED