
SMB-LOCK

INTRODUCTION

Radiall offers SMB LOCK plugs with a 2-step connection system:


1. Snap the plug on the male connector (fig. 1)
2. Lock by pushing down the coupling nut (fig. 2)




(fig. 1) (fig. 2)

This range:

- Is intermateable with the standard SMB male connectors
- Benefits from a low intermodulation
- Replaces the standard SMB and screw-on connectors in all applications requiring:
  - A fast connection • A reliable lock-on connection • Long durability
- Possibility to visually control the locking system

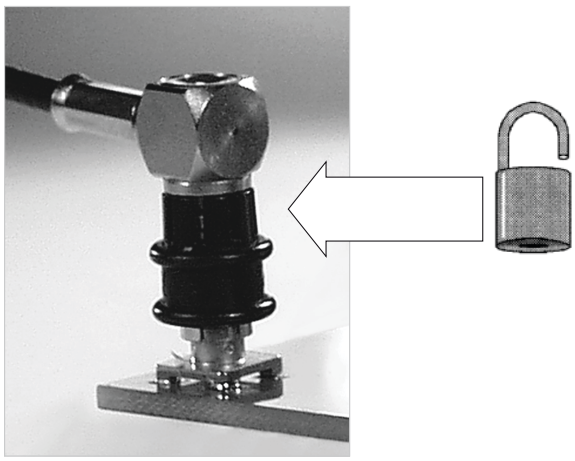


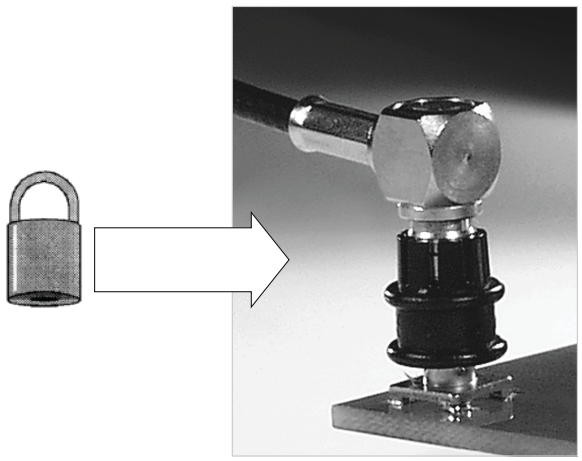

- The connector allows a 360° cable rotation
- Coupling nut

The coupling nut is made with POM (halogen free). Its standard color is black.

INTERFACE

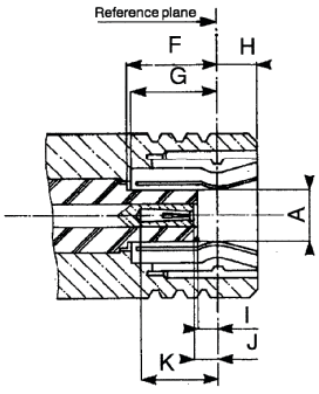

PLUG
(with Female Contact)

LETTER	MM		INCH	
	MIN	MAX	MIN	MAX
A DIA	-	2.06	-	.081
F	3.58	-	.141	-
G	3.58	-	.141	-
H	-	1.63	-	.064
I	0.18	-	.007	-
J	0.18	0.94	.007	.037
K	2.97	-	.117	-