


SMB-A and SUBGLIS

SMB LIMITED DETENT (SMB-A)

STRAIGHT PCB RECEPTACLES (FEMALE CENTER CONTACT)










PART NUMBER	CAPTIVE CENTER CONTACT	PANEL DRILLING	FINISH	PACKAGING
R115 427 000	Yes	P05	Gold	Unit

RIGHT ANGLE PCB RECEPTACLE (FEMALE CENTER CONTACT)



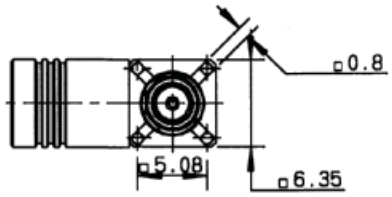




PART NUMBER	CAPTIVE CENTER CONTACT	PANEL DRILLING	FINISH	PACKAGING
R115 666 000	Yes	P04	Gold	Unit


SMB SLIDE-ON (SUBGLIS)


Slide-on connectors (mating/unmating force: 2.2 N to 4.9 N)

The SMB slide-on connectors are completely intermateable with standard SMB and SMB limited detent connectors and can be used for test applications. The SMB slide-on connectors have the same electrical characteristics as standard SMB connectors.

PCB RECEPTACLES







PART NUMBER	CAPTIVE CENTER CONTACT	PANEL DRILLING	FINISH	PACKAGING	NOTE
R116 426 000	Yes	P03	Gold	Unit	Male Center Contact