


SMPM


INTERFACE SMPM

PLUG WITH FEMALE CENTER CONTACT




LETTER	MM		INCH		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	-	2.41	-	.095	Dia
B	1.73	-	.068	-	-
C	-	0.58	-	.023	-
E	0	0.20	0	.008	Center contact recession
F	1.27	-	.050	-	-
*	Accept 0.305 +/-0.025 (.012" +/-0.001) dia pin				

JACK WITH MALE CENTER CONTACT (FULL DETENT)

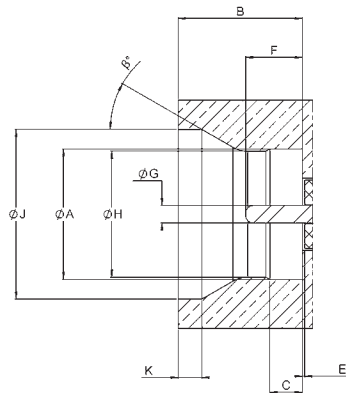

LETTER	MM		INCH		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	2.18	2.24	.086	.088	Dia
B	2.08	2.13	.082	.084	-
C	0.53	0.58	.021	.023	-
E	0	0.12	0	.004	-
F	0.76	1.14	.030	.045	-
G	0.28	0.33	.011	.013	Dia
H	2.11	2.16	.083	.085	Dia
J	2.82	2.92	.111	.115	Dia
K	0.25	0.56	.010	.022	-
b	25	35	-	-	Degree

JACK WITH MALE CENTER CONTACT (SMOOTH BORE)

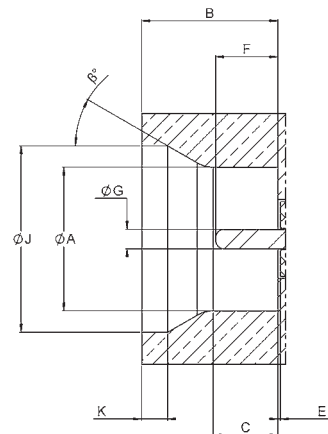

LETTER	MM		INCH		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	2.18	2.24	.086	.088	Dia
B	2.08	2.13	.082	.084	-
E	0	0.12	0	.004	-
F	0.76	1.14	.030	.045	-
G	0.28	0.33	.011	.013	Dia
J	2.82	2.92	.111	.115	Dia
K	0.25	0.56	.010	.022	-
b	25	35	-	-	Degree