
N 50Ω

CAPS & ACCESSORIES

PROTECTIVE CAPS






FIG. 1




FIG. 2




FIG. 3




FIG. 4




FIG. 5




FIG. 6


PART NUMBER	FIG.	DIMENSIONS (MM)		NOTE
		A	B	
R161 804 000	1	13.9	3.8	Male with Cord
R161 805 410	2	13.9	2	Male with Cord
R161 841 000	3	20.4	3.9	Female with Chain
R161 844 000	4	20.4	3.8	Female with Cord
R161 853 000	5	13.9	3.9	Male with Chain
R161 862 000	6	20.1		Male Short Circuit with Chain

FIELD-REPLACEABLE CONTACTS (FOR UNIVERSAL RECEPTACLE)

These accessories have been specifically designed for the adjustment at the rear of hermetically sealed universal receptacles. The choice of their dimensions depends on the PCB or on the thickness of the MIC box. These contacts and insulators are also compatible with SMA UNIVERSAL RECEPTACLES.





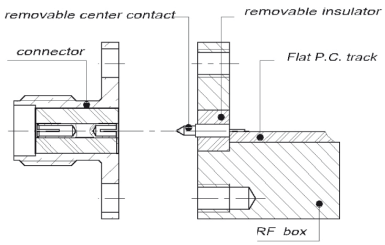





FIG. 1







FIG. 2



PART NUMBER	FIG.	A	NOTE	ASSOCIATED INSULATOR P/N
R280 461 000	1	3.37	Flat Tab	R280 468 000
R280 463 000	2		Cylindrical Tab	

FIELD-REPLACEABLE INSULATOR





PART NUMBER	A	PACKAGING
R280 468 000	3.17	10