
MMCX

INTRODUCTION

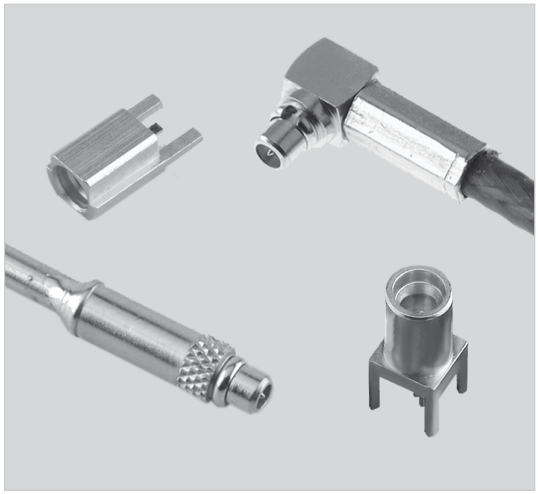

50Ω	DC - 6 GHz

GENERAL


- Subminiature coaxial connectors
- Push-pull snap-on mating
- Complies with specification CECC 22000

APPLICATIONS


- Wireless telecom
- PCMCIA cards
- RF test ports
- Medical

MMCX series is dedicated for wire to PCB connection where low space above the PCB is available (less than 2.1 mm). MMCX is adapted to high volume applications and Pick & Place manufacturing processes.

INTERFACE

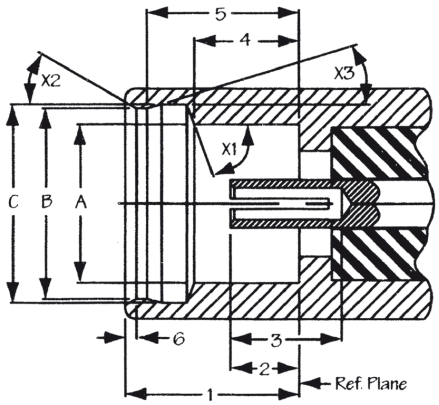

JACK

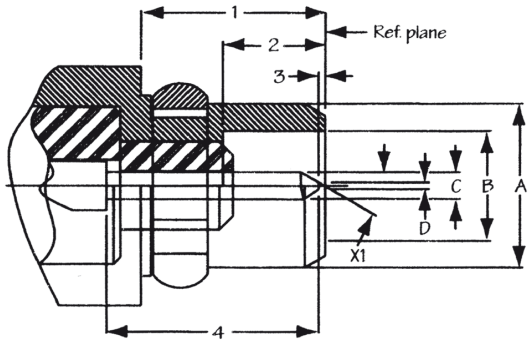

PLUG

LETTER	MM		INCH	
	MIN	MAX	MIN	MAX
1	2.60	-	.102	-
2	0.90	1.20	.035	.047
3	1.40	-	.055	-
4	1.57	1.63	.062	.064
5	2.30	2.34	.091	.092
6	-	0.23	-	.009
A	2.41	-	.095	-
B	2.88	2.90	.113	.114
C	3.00	3.04	.118	.120
X1	68°	72°	-	-
X2	28°	32°	-	-
X3	13°	17°	-	-

LETTER	MM		INCH	
	MIN	MAX	MIN	MAX
1	2.70	-	.106	-
2	1.45	-	.057	-
3	0	0.25	-	.010
A	2.40	-	.095	-
B	1.58	1.62	.062	.064
C	0.38	0.42	.015	.017
D	-	0.20	-	.008
X1	29°	31°	-	-