


WAREHOUSE CLEARANCE

THE ITEMS BELOW ARE SUBJECT TO PRIOR SALE & SUPPLY ON HAND AS OF August 18, 2008! ALL SALES ARE FINAL!

ST4000-SF

**SMA FEMALE, 4 HOLE PANEL MOUNT
SOLDER CUP CONTACT**

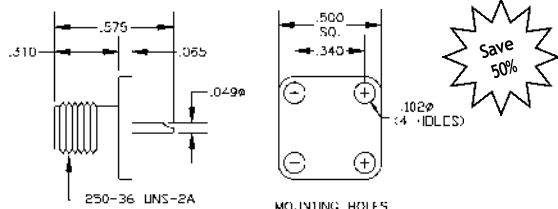


SSTCIFICATIONS

BODY: PASSIVATED STAINLESS STEEL
CONTACT: GOLD PLATED
INSULATOR: PTFE

PRICE
1-99 \$3.25 100-999 \$2.95

ST4099-SF

**SMA FEMALE, 4 HOLE PANEL MOUNT
STUB CONTACT, .590 EXTENDED DIELECTRIC**

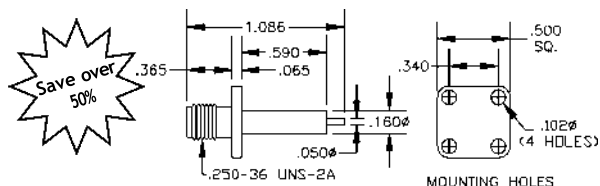


SSTCIFICATIONS

BODY: PASSIVATED STAINLESS STEEL
CONTACT: GOLD PLATED
INSULATOR: PTFE

PRICE
1-99 \$3.25 100-999 \$2.95

ST4128-SF

**SMA FEMALE, 2 HOLE PANEL MOUNT
STUB CONTACT, .590 EXTENDED DIELECTRIC**

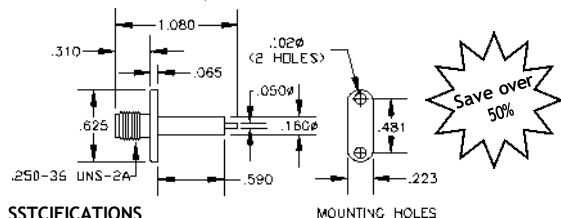


SSTCIFICATIONS

BODY: PASSIVATED STAINLESS STEEL
CONTACT: GOLD PLATED
INSULATOR: PTFE

PRICE
1-99 \$3.25 100-999 \$2.95

ST4189-SF

**SMA FEMALE BULKHEAD
.050 DIA. STUB CONTACT**

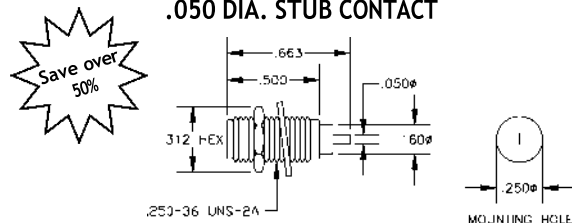

SSTCIFICATIONS

BODY: PASSIVATED STAINLESS STEEL
CONTACT: GOLD PLATED
INSULATOR: PTFE


PRICE
1-99 \$3.25 100-999 \$2.95

ST7059-1

**26.5 GHz SINGLE STAGE BENCH MOUNT
ROTARY ATTENUATOR**



PRICE
\$1595.00



SSTCIFICATIONS

IMSDANCE:
FREQUENCY RANGE:
CONNECTOR TYST:
POWER RATING:

50 OHMS
DC-26.5 GHz
2.92mm FEMALE
2 WATTS AVERAGE
200 WATTS STAK
0° C TO 54° C
0-9 dB IN 1 dB STEPS


OSTRATING TEMP:
ATTENUATION RANGE:
ATTENUATION ACCURACY
OVERALL:
VSWR:

±.5 dB
DC TO 18 GHz 1.45:1 MAX.
18 GHz TO 26.5 GHz 1.70:1 MAX.

DC TO 500 MHz N ATTENUATORS

SSTCIFICATIONS

AVERAGE POWER HANDLING CAPABILITY: 1 WATT
IMSDANCE: 50 OHMS
ACCURACY: 1,2,3 & 10 ±.3 dB
VSWR: 1.20:1 MAX.



*ST7002-30-SP05


DC TO 250 MHz
ACCURACY: ±.5 dB
VSWR: 1.12:1 MAX.

AVERAGE POWER HANDLING CAPABILITY: 1 WATT

MODEL NO.	ATTENUATION	PRICE
ST7002-1-SP05	1 dB	\$21.95
ST7002-2-SP05	2 dB	21.95
ST7002-3-SP05	3 dB	21.95
ST7002-10-SP05	10 dB	19.95
ST7002-30-SP05*	30 dB	14.95

ST4118-SP98

**50 OHM, SMA FEMALE RIGHT ANGLE
PRINTED CIRCUIT MOUNT**

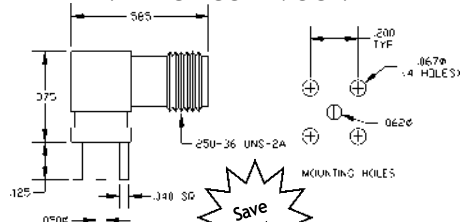


SSTCIFICATIONS

BODY: BRASS GOLD PLATED
CONTACT: GOLD PLATED
INSULATOR: PTFE

PRICE
1-999 \$3.50 1000+ \$2.95

50 OHM, SMA MALE TERMINATION



ST6002-2SP02
DC - 2.5 GHz
PRICE
1-99 \$3.00 100-999 \$2.50
VSWR: 1.10:1 MAX.

ST6002-8SP02
DC - 8 GHz
PRICE
1-99 \$5.00 100-999 \$4.50
VSWR: 1.15:1 MAX.

SSTCIFICATIONS

POWER
AVERAGE: 1 WATT
STAK: 500 WATTS MAX. (1uSec Pulse, .01% Duty Cycle)
BODY: GOLD PLATED
CONTACT: GOLD PLATED



Mob: +91 7217885948

www.rfconnector.in

pradeep@rfconnector.in



www.rfconnector.in