



DC BIAS PASSING ATTENUATORS

ELECTRICAL SPECIFICATIONS (@25°C AMBIENT)

FREQUENCY RANGE.....	500 MHz-2 GHz
ATTENUATION ACCURACY	
6 dB.....	±1.0 dB MAX.
10 dB.....	±1.5 dB MAX.
20 dB.....	±2.0 dB MAX.
IMPEDANCE.....	50 OHMS EXCEPT "F" IS 75 OHMS
VSWR.....	1.35:1 MAX. EXCEPT "F" IS 1.45:1 MAX.
VOLTAGE RATING.....	100 VOLTS MAX.
DC CURRENT.....	2 AMPS MAX.
RF POWER (AVG).....	2 WATTS MAX.
OPERATING TEMP. RANGE.....	-55°C TO +125°C

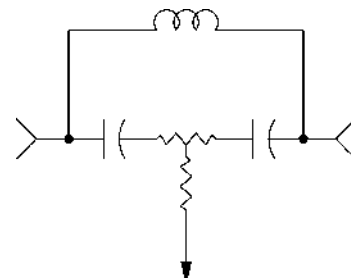


SMA




Model No.	ATTENUATION	1-24	25-49	50-99	100 +
ST7061-6	6 dB	\$69.85	\$64.96	\$60.07	\$55.88
ST7061-10	10 dB	69.85	64.96	60.07	55.88
ST7061-20	20 dB	69.85	64.96	60.07	55.88

N




Model No.	ATTENUATION	1-24	25-49	50-99	100 +
ST7062-6	6 dB	\$80.80	\$75.14	\$69.49	\$64.64
ST7062-10	10 dB	80.80	75.14	69.49	64.64
ST7062-20	20 dB	84.85	78.91	72.97	67.88

TNC



Model No.	ATTENUATION	1-24	25-49	50-99	100 +
ST7063-6	6 dB	\$92.75	\$86.26	\$79.77	\$74.20
ST7063-10	10 dB	92.75	86.26	79.77	74.20
ST7063-20	20 dB	95.70	89.00	82.30	76.56


F



Model No.	ATTENUATION	1-24	25-49	50-99	100 +
ST7064-6	6 dB	\$99.35	\$92.40	\$85.44	\$79.48
ST7064-10	10 dB	99.35	92.40	85.44	79.48
ST7064-20	20 dB	99.35	92.40	85.44	79.48

CONTINUOUSLY VARIABLE BENCH MOUNT ATTENUATORS

Turns Counting Dial With Locking Lever
SMA Female Connectors
50 Ohm Nominal Impedance
Average Power 5 Watts
Stake Power 3KW



Attenuators /
RF Components

MODEL NO.	FREQUENCY RANGE	ATTENUATION RANGE	VSWR MAX.	INSERTION LOSS (MAX.)	PRICE			
					1-24	25-49	50-99	100 +
ST7065-1	1-2 GHz	7 dB	2.0:1	.5 dB	\$426.95	\$397.06	\$367.18	\$341.56
ST7065-2	2-4 GHz	10 dB	1.8:1	.5 dB	426.95	397.06	367.18	341.56
ST7065-3	2-4 GHz	20 dB	1.5:1	.5 dB	449.85	418.36	386.87	359.88
ST7065-4	4-8 GHz	10 dB	1.5:1	.75 dB	430.50	400.37	370.23	344.40
ST7065-5	4-8 GHz	20 dB	1.5:1	.75 dB	449.85	418.36	386.87	359.88
ST7065-6	4-8 GHz	30 dB	1.5:1	.75 dB	508.30	472.72	437.14	406.64
ST7065-7	8-12.4 GHz	10 dB	1.7:1	.75 dB	472.80	439.70	406.61	378.24
ST7065-8	8-12.4 GHz	20 dB	1.7:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-9	8-12.4 GHz	30 dB	1.7:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-10	8-12.4 GHz	40 dB	1.7:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-11	12.4-18 GHz	10 dB	1.5:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-12	12.4-18 GHz	20 dB	1.5:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-13	12.4-18 GHz	30 dB	1.5:1	.75 dB	522.45	485.88	449.31	417.96
ST7065-14	12.4-18 GHz	40 dB	1.5:1	.75 dB	522.45	485.88	449.31	417.96



Mob: +91 7217885948

www.rfconnector.in

pradeep@rfconnector.in



www.rfconnector.in