






IMSTDANCE MATCHING PADS



MODEL NO.	CONNECTOR A 50 OHM	CONNECTOR B 75 OHM	FREQUENCY DC TO GHz	VSWR MAXIMUM	ATTENUATION LOSS	ACCURACY	P R I C E			
							1-24	25-49	50-99	100 +
ST7006	BNC MALE	BNC FEMALE	1	1.20:1	5.7 dB	± .5 dB	\$37.55	\$34.92	\$32.29	\$30.04
ST7007	BNC FEMALE	BNC MALE	1	1.20:1	5.7 dB	± .5 dB	37.55	34.92	32.29	30.04
ST7066	BNC MALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7067	BNC MALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7068	BNC FEMALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	76.35	71.01	65.66	61.08
ST7069	BNC FEMALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	69.95	65.05	60.16	55.96
ST7027	N MALE	N FEMALE*	1	1.20:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7028	N FEMALE	N MALE*	1	1.20:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7070	N MALE	N FEMALE*	3	1.35:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7083	N FEMALE	N MALE*	3	1.35:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7071	N MALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7072	N MALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7073	N FEMALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7074	N FEMALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7075	SMA MALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7076	SMA MALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7077	SMA FEMALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7078	SMA FEMALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	73.10	67.98	62.87	58.48
ST7079	TNC MALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	78.30	72.82	67.34	62.64
ST7080	TNC MALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	78.30	72.82	67.34	62.64
ST7081	TNC FEMALE	F MALE	3	1.25:1	5.7 dB	± .5 dB	78.30	72.82	67.34	62.64
ST7082	TNC FEMALE	F FEMALE	3	1.25:1	5.7 dB	± .5 dB	78.30	72.82	67.34	62.64

*WARNING: 75 OHM N CONNECTORS WILL NOT MATE TO STANDARD 50 OHM N CONNECTORS.

HIGH POWER TERMINATIONS

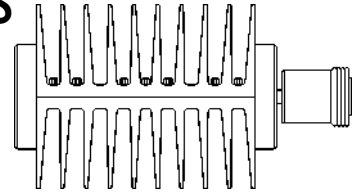

MODEL NO.	CONNECTOR SERIES	POWER HANDLING CAP. WATTS	FREQUENCY RANGE DC TO GHz	MAXIMUM VSWR	P R I C E			
					1-24	25-49	50-99	100 +
ST6095	SMA MALE	5	18	1.25	\$84.60	\$78.68	\$72.76	\$67.68
ST6096	SMA FEMALE	5	18	1.25	109.65	101.97	94.30	87.72
ST6097	N MALE	5	18	1.25	80.80	75.14	69.49	64.64
ST6098	N FEMALE	5	18	1.25	80.80	75.14	69.49	64.64
ST6099	TNC MALE	5	18	1.25	92.75	86.26	79.77	74.20
ST6138	TNC FEMALE	5	18	1.25	104.45	97.14	89.83	83.56
ST6100	7/16 MALE	5	7	1.25	104.45	97.14	89.83	83.56
ST6139	7/16 FEMALE	5	7	1.25	104.45	97.14	89.83	83.56
ST6034	BNC MALE	10	4	1.25	115.70	107.60	99.50	92.56
ST6101	BNC FEMALE	10	4	1.25	135.80	126.29	116.79	108.64
ST6035	N MALE	10	18	1.25	179.05	166.52	153.98	143.24
ST6102	N FEMALE	10	18	1.25	179.05	166.52	153.98	143.24
ST6036	SMA MALE	10	18	1.25	149.55	139.08	128.61	119.64
ST6103	SMA FEMALE	10	18	1.40	149.55	139.08	128.61	119.64
ST6104	TNC MALE	10	18	1.25	191.05	177.68	164.30	152.84
ST6140	TNC FEMALE	10	18	1.25	191.05	177.68	164.30	152.84
ST6105	7/16 MALE	10	7	1.25	207.45	192.93	178.41	165.96
ST6141	7/16 FEMALE	10	7	1.25	207.45	192.93	178.41	165.96
ST6106	N MALE	25	18	1.40	282.10	262.35	242.61	225.68
ST6037	N FEMALE	25	18	1.25	365.70	340.10	314.50	292.56
ST6038	SMA FEMALE	25	18	1.40	313.45	291.51	269.57	250.76
ST6107	7/16 MALE	25	7	1.25	313.45	291.51	269.57	250.76
ST6039	N FEMALE	50	18	1.45	387.55	360.42	333.29	310.04
ST6040	SMA FEMALE	50	18	1.45	387.30	360.19	333.08	309.84
ST6112	7/16 FEMALE	50	7	1.35	392.00	364.56	337.12	313.60
ST6041	BNC FEMALE	100	2	1.25	576.55	536.19	495.83	461.24
ST6042	N FEMALE	100	2	1.25	609.95	567.25	524.56	487.96
ST6043	SMA FEMALE	100	2	1.25	616.50	573.35	530.19	493.20
ST6137	7/16 FEMALE	100	2	1.25	634.40	589.99	545.58	507.52

Attenuators /
RF Components



Mob: +91 7217885948

www.rfconnector.in

pradeep@rfconnector.in



www.rfconnector.in