


DUAL DIRECTIONAL COUPLERS

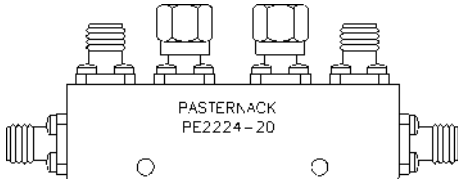

ALL CONNECTORS ARE SMA FEMALE
OPERATING TEMPERATURE: - 55° C TO +105° C


PRICE

1-24	25-49	50-99	100 +
\$522.45	\$485.88	\$449.31	\$417.96

MODEL NO.	FREQUENCY RANGE (GHz)	COUPLING (dB) INCLUDES FREQUENCY SENSITIVITY	FREQUENCY SENSITIVITY (dB)	TRUE INSERTION LOSS (dB MAX)	DIRECTIVITY (dB MINIMUM)	VSWR MAXIMUM		POWER AVERAGE INCIDENT WATTS	POWER STAK (kW)
						PRIMARY LINE	SECONDARY LINE		
ST2217-10	0.5 - 1.0	10 ± 1.25	± 0.80	1.50	22	1.15	1.10	10	3
ST2217-20	0.5 - 1.0	20 ± 1.25	± 0.80	0.50	22	1.15	1.10	50	3
ST2217-30	0.5 - 1.0	30 ± 1.25	± 0.80	0.40	22	1.15	1.10	50	3
ST2218-10	1.0 - 2.0	10 ± 1.25	± 0.80	1.50	22	1.15	1.10	10	3
ST2218-20	1.0 - 2.0	20 ± 1.25	± 0.80	0.50	22	1.15	1.10	50	3
ST2218-30	1.0 - 2.0	30 ± 1.25	± 0.80	0.40	22	1.15	1.10	50	3
ST2219-10	2.0 - 4.0	10 ± 1.25	± 0.80	1.50	20	1.20	1.15	10	3
ST2219-20	2.0 - 4.0	20 ± 1.25	± 0.80	0.50	20	1.20	1.15	50	3
ST2219-30	2.0 - 4.0	30 ± 1.25	± 0.80	0.40	20	1.20	1.15	50	3
ST2220-10	2.6 - 5.2	10 ± 1.25	± 0.80	1.50	18	1.30	1.25	10	3
ST2220-20	2.6 - 5.2	20 ± 1.25	± 0.80	0.50	18	1.30	1.25	50	3
ST2220-30	2.6 - 5.2	30 ± 1.25	± 0.80	0.40	18	1.30	1.25	50	3
ST2221-10	4.0 - 8.0	10 ± 1.25	± 0.80	1.70	18	1.35	1.25	10	3
ST2221-20	4.0 - 8.0	20 ± 1.25	± 0.80	0.50	18	1.35	1.25	50	3
ST2221-30	4.0 - 8.0	30 ± 1.25	± 0.80	0.40	18	1.35	1.25	50	3
ST2222-10	7.0 - 12.4	10 ± 1.25	± 0.60	1.90	16	1.35	1.30	10	3
ST2222-20	7.0 - 12.4	20 ± 1.25	± 0.60	0.70	16	1.35	1.30	50	3
ST2222-30	7.0 - 12.4	30 ± 1.25	± 0.60	0.60	16	1.35	1.30	50	3
ST2223-10	8.0 - 16.0	10 ± 1.25	± 0.80	2.20	15	1.40	1.40	10	2
ST2223-20	8.0 - 16.0	20 ± 1.25	± 0.80	1.00	15	1.40	1.40	50	2
ST2223-30	8.0 - 16.0	30 ± 1.25	± 0.80	1.00	15	1.40	1.40	50	2
ST2224-20	12.4 - 18.0	20 ± 1.25	± 0.60	1.00	15	1.40	1.40	50	1
ST2224-30	12.4 - 18.0	30 ± 1.25	± 0.60	1.00	15	1.40	1.40	50	1

HIGH POWER DIRECTIONAL COUPLERS

600 WATTS CW
10K STAK

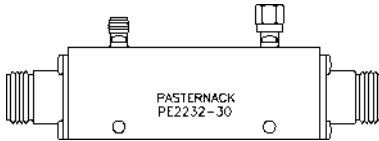

INPUT & OUTPUT CONNECTORS ARE N FEMALE
COUPLED PORT IS SMA FEMALE

MODEL NO.	FREQUENCY RANGE (GHz)	COUPLING (dB) INCLUDES FREQ. SENSITIVITY	FREQUENCY SENSITIVITY (dB)	INSERTION LOSS (dB MAX)	DIRECTIVITY (dB Min.)	VSWR (MAX) PRIMARY LINE	PRICE			
							1-24	25-49	50-99	100 +
ST2225-30	0.5 - 2.0	30 ± 1.0	± 0.75	0.2	18	1.15	\$1044.95	\$971.80	\$898.66	\$835.96
ST2226-30	1.0 - 2.0	30 ± 1.0	± 0.75	0.2	18	1.15	929.50	864.44	799.37	743.60
ST2227-30	2.0 - 4.0	30 ± 1.0	± 0.75	0.2	18	1.15	1035.00	962.55	890.10	828.00
ST2228-30	1.0 - 4.0	30 ± 1.0	± 0.70	0.2	15	1.15	1182.50	1099.73	1016.95	946.00
ST2229-30	2.6 - 5.2	30 ± 1.0	± 0.75	0.2	18	1.20	880.00	818.40	756.80	704.00
ST2230-30	4.0 - 8.0	30 ± 1.0	± 0.75	0.2	18	1.30	926.75	861.88	797.01	741.40
ST2231-30	1.5 - 4.5	30 ± 1.0	± 0.60	0.2	18	1.20	1182.50	1099.73	1016.95	946.00
ST2232-30	2.0 - 8.0	30 ± 1.0	± 0.60	0.2	16	1.30	1393.95	1296.37	1198.80	1115.16
ST2233-30	7.0 - 11.0	30 ± 1.0	± 0.50	0.2	16	1.30	880.00	818.40	756.80	704.00
ST2234-30	5.0 - 11.0	30 ± 1.0	± 0.50	0.2	15	1.30	731.50	680.30	629.09	585.20
ST2235-30	4.0 - 12.0	30 ± 1.0	± 0.60	0.2	15	1.30	1182.50	1099.73	1016.95	946.00
ST2236-35	1.0 - 11.0	35 ± 1.5	± 1.50	0.2	15	1.30	1776.45	1652.10	1527.75	1421.16

Attenuators /
RF Components



Mob: +91 7217885948

www.rfconnector.in

pradeep@rfconnector.in



www.rfconnector.in