
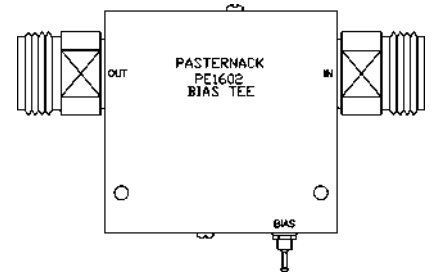



BIAS "TEE"





MODEL NO.	CONNECTORS RF OUT & RF IN	BIAS CONNECTORS	FREQUENCY RANGE	VSWR MAXIMUM	ISOLATION (RF TO BIAS PORT) TYPICAL	DC VOLT MAX.	DC CURRENT MAXIMUM	P R I C E			
								1-24	25-49	50-99	100 +
ST1606	SMA FEMALE	SOLDER LUG & PIN	100 KHz-12.4 GHz	1.60:1	30 dB	24	.75 AMPS	\$344.80	\$320.66	\$296.53	\$275.84
ST1607	SMA FEMALE	SOLDER LUG & PIN	100 KHz-18 GHz	1.80:1	30 dB	24	.75 AMPS	417.95	388.69	359.44	334.36
ST1608	SMA FEMALE	SOLDER LUG & PIN	100 KHz-26.5 GHz	1.80:1	30 dB	24	.75 AMPS	806.95	750.46	693.98	645.56
ST1609	2.92mm MALE/FEMALE*	SMA FEMALE	100 KHz-40 GHz	1.80:1	30 dB	25	250 mA	1353.25	1258.52	1163.80	1082.60
ST1610	2.4mm MALE/FEMALE**	SMA FEMALE	100 KHz-50 GHz	1.80:1	30 dB	25	250 mA	1666.75	1550.08	1433.41	1333.40
ST1611	SMA FEMALE	SOLDER LUG & PIN	10 MHz-2.5 GHz	1.60:1	30 dB	100	2.5 AMPS	208.95	194.32	179.70	167.16
ST1613	SMA FEMALE	SOLDER LUG & PIN	10 MHz-4 GHz	1.60:1	30 dB	100	2.5 AMPS	240.30	223.48	206.66	192.24
ST1615	SMA FEMALE	SOLDER LUG & PIN	10 MHz-6 GHz	1.60:1	30 dB	100	2.5 AMPS	240.30	223.48	206.66	192.24
ST1604	SMA FEMALE	SOLDER PINS	100 MHz-6 GHz	1.50:1	25 dB	50	500 mA	198.50	184.61	170.71	158.80
ST1617	SMA FEMALE	SOLDER LUG & PIN	250 MHz -2.5 GHz	1.50:1	20 dB	100	7 AMPS	470.20	437.29	404.37	376.16
ST1605	SMA FEMALE	SOLDER PINS	500 MHz-10 GHz	1.50:1	25 dB	50	200 mA	313.45	291.51	269.57	250.76
ST1603	SMA FEMALE	SOLDER PINS	1 GHz-5 GHz	1.50:1	25 dB	50	1000 mA	188.05	174.89	161.72	150.44
ST1612	N FEMALE	SOLDER LUG & PIN	10 MHz-2.5 GHz	1.60:1	30 dB	100	2.5 AMPS	208.95	194.32	179.70	167.16
ST1614	N FEMALE	SOLDER LUG & PIN	10 MHz-4 GHz	1.60:1	30 dB	100	2.5 AMPS	261.20	242.92	224.63	208.96
ST1616	N FEMALE	SOLDER LUG & PIN	10 MHz-6 GHz	1.60:1	30 dB	100	2.5 AMPS	261.20	242.92	224.63	208.96
ST1618	N FEMALE	SOLDER LUG & PIN	250 MHz-2.5 GHz	1.50:1	20 dB	100	7 AMPS	517.25	481.04	444.84	413.80

*2.92mm connectors will mate with SMA, 3.5mm and K connectors. The K connector is a registered trademark of the Anritsu Company.


**1.85mm, 2.4mm & V connectors will mate mechanically & electrically to each other. The V connector is a trademark of the Anritsu Company.



CAPS



SHORTS



Model No.	Series	Gender	Chain	1-24	25-49	50-99	100 +
ST6038	//10	FEMALE	YES	\$29.20	\$27.10	\$25.11	\$23.30
ST6037	//10	MALE	YES	29.20	27.10	25.11	23.30
ST6013	BNC	MALE	YES	5.30	4.93	4.56	4.24
ST6014	BNC	MALE	NO	5.20	4.98	4.73	4.30
ST6015	BNC	FEMALE	YES	4.45	4.14	3.83	3.56
ST6016	BNC	FEMALE	NO	5.15	4.79	4.43	4.12
ST6046	C	MALE	YES	13.70	12.74	11.78	10.96
ST6019	C	MALE	NO	13.05	12.14	11.22	10.44
ST60110	C	FEMALE	YES	17.40	16.18	14.96	13.92
ST60111	C	FEMALE	NO	16.65	15.48	14.32	13.32
ST6039	HN	MALE	YES	18.05	16.79	15.52	14.44
ST60113	HN	MALE	NO	13.05	12.14	11.22	10.44
ST60114	HN	FEMALE	YES	18.75	17.44	16.13	15.00
ST60115	HN	FEMALE	NO	17.70	16.46	15.22	14.10
ST60116	N/UHF	MALE	YES	4.60	4.28	3.96	3.68
ST60117	N/UHF	MALE	NO	4.85	4.51	4.17	3.88
ST60118	N	FEMALE	YES	6.90	6.42	5.93	5.52
ST60119	N	FEMALE	NO	5.60	5.21	4.82	4.48
ST60117	SC	MALE	YES	73.70	67.98	62.87	58.48
ST60118	SC	FEMALE	YES	62.65	58.20	53.88	50.12
ST60119	SMA	MALE	YES	7.40	6.88	6.36	5.92
ST60120	SMA	MALE	NO	6.50	6.05	5.59	5.20
ST60121	SMA	FEMALE	YES	14.80	13.76	12.73	11.84
ST60122	SMA	FEMALE	NO	14.55	13.53	12.51	11.64
ST60121	SMB	PLUG	YES	15.60	14.51	13.42	12.48
ST60122	SMB	JACK	YES	7.60	7.07	6.54	6.08
ST60123	SML	PLUG	YES	10.40	9.67	8.94	8.32
ST60124	SML	JACK	YES	10.40	9.67	8.94	8.32
ST60125	SSMA	MALE	NO	7.25	6.74	6.24	5.80
ST60126	75 OHM SMB	PLUG	YES	22.95	21.34	19.74	18.36
ST60127	75 OHM SML	PLUG	YES	22.95	21.34	19.74	18.36
ST60128	INL	FEMALE	YES	7.75	7.21	6.67	6.20
ST60129	INL	FEMALE	NO	7.60	7.07	6.54	6.08
ST60130	INL	MALE	YES	5.55	5.16	4.77	4.44
ST6144	TNC	MALE	NO	5.90	5.49	5.07	4.72

