


Synergy Telecom P Ltd.

BNC F BN BH TAFLON SOLDER

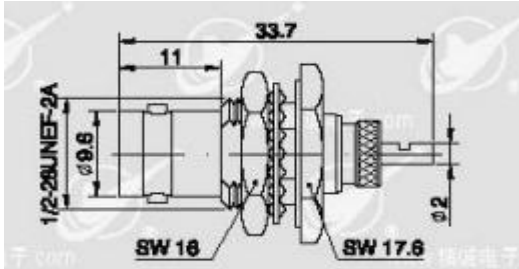

Electrical Specification

Characteristic Impedance	50 ohm
Typical Frequency Range	DC- 3 GHz
VSWR	<1.2
Contact Resistance	Inner Conductor : < 1.5m Ω Outer Conductor : < 1 m Ω
Dielectric withstanding Voltage	>2500V RMS, 50Hz, At sea Level
Dielectric Resistance	> 5000 M Ω
RoHS	Compliance

Mechanical

Durability	Mating cycle \geq 500
------------	-------------------------

Material Specification

	Material	Plating
Body	Brass	White Bronze
Insulator	Teflon/PTFE	-
Center Conductor	Phosphor Copper	Gold

Environmental

Temperature Range	- 10°C – +55 °C
-------------------	-----------------