


Synergy Telecom P Ltd.

BNC(F) RG316/RG174/RG179/LMR 100 CRIMP:-

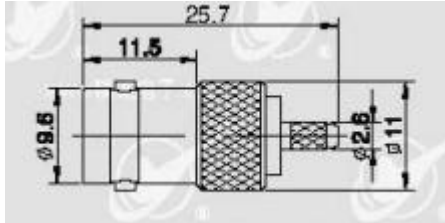

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC- 3 GHz
VSWR	<1.2
Contact Resistance	Inner Conductor : < 1.5 m Ω Outer Conductor : < 1.0 m Ω
Dielectric withstanding Voltage	>2500V RMS, 50Hz, At sea Level
Dielectric Resistance	> 5000 M Ω
RoHS	Compliance

Mechanical

Durability Mating	cycle \geq 500
-------------------	------------------

Material Specification

	Material	Plating
Body	Brass	White Bronze
Insulator	Teflon/PTFE	Plastic Body
Center Conductor	Phosphor Copper	Gold(AU)

Environmental

Temperature Range	- 10°C – +55 °C
-------------------	-----------------

WZ-47 BUDHELLA VILLAGE, VIKASPURI, NEW DELHI – 110018
PHONE: 011-28533349, MOB: 9810138894/9212558066, FAX: 011-28533349
EMAIL: info@rfconnector.in, WEBSITE: <http://rfconnector.in/>