


Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd **BNC Female B/H For BT 3002 Cable :-** Synergy Telecom (P) Ltd

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy

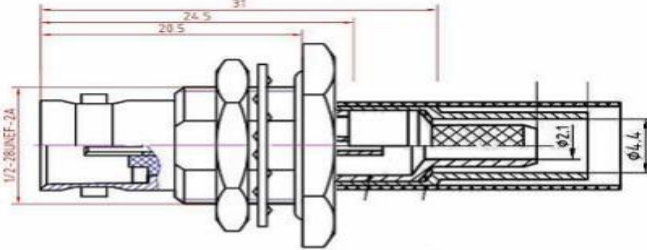

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

Electrical Specification

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

| | |
|--|--|
| Characteristic Impedance | 75 ohm |
| Frequency Range | DC- 3 GHz |
| VSWR | <1.2 |
| Contact Resistance | Inner Conductor : < 1.5 m Ω |
| | Outer Conductor : < 1.0 m Ω |
| Dielectric withstanding Voltage | >2500V RMS, 50Hz, At sea Level |
| Dielectric Resistance | > 5000 M Ω |
| RoHS | Compliance |

Mechanical

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

Durability Mating cycle ≥500

Material Specification

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

| | | | |
|-------------------------|-----------------|------------------------|---------------------|
| Body | Material | Brass | Plating |
| Insulator | | Teflon/PTFE | White Bronze |
| Center Conductor | | Phosphor Copper | Gold(AU) |

Environmental

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd

Temperature Range - 10°C – +55 °C

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/

Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd Synergy Telecom (P) Ltd