



Din Male Right Angle For 1/4"SF Cable


Description: CONNECTOR DIN M R/A 1/4"SF CABLE

Electrical Specification

Frequency arrange: 0-3GHz
 Temp arrange: -45°C ~ +85°C
 Retention: inner conductor $\geq 6N$
 Contact resistance:
 Between inner conductor $\leq 5m\Omega$
 Between outer conductor: 2.5mΩ
 Insulation resistance: $\geq 10000M\Omega$
 Voltage Endurance: 4000V
 VSWR : 0-2GHZ ≤ 1.15
 2-3GHZ ≤ 1.2
 Intermodulation: - 140dBc

Physical Specification:

Impedance: 50Ω
 Vibration: 150m/S²(10~500Hz)
 Impaction: 500m/S²
 Applicable standards: IEC169-4
 Tightening Torque in (Nm) : 25-30mm
 Pull Out Strength in N : 1200N
 IP Rating: IP67

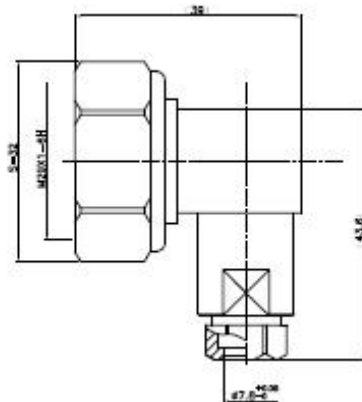

Material:

INNER CONDUCTOR: BRASS GOLD PLATED
OUTER CONDUCTOR: BRASS NICKEL PLATED


SYNERGY TELECOM (P) LTD.
 13-15, RPS Flats, E-Block, Vigna Purli, New Delhi - 110 018 (INDIA)
 Phone: +91-11-28533349 Fax: +91-11-28535435 Mobile: +91-981038854
 Email: pradeep@rfconnectorhouse.com, MSNE.pradeep@parvatisynergy.net, practmail.com
 PRINCIPAL SITE: <http://www.vltron.com>, 3898 Account: pradeepog
 My trademark ID: synergytelecom www.rfconnectors.info

pdfMachine

A pdf writer that produces quality PDF files with ease!

Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, simply open the document you want to convert, click "print", select the "Broadgun pdfMachine printer" and that's it! Get yours now!