


# Synergy Telecom P Ltd.

## N FEMALE CRIMP CONNECTOR RG 213 CABLE

Part no-ST02NF213104

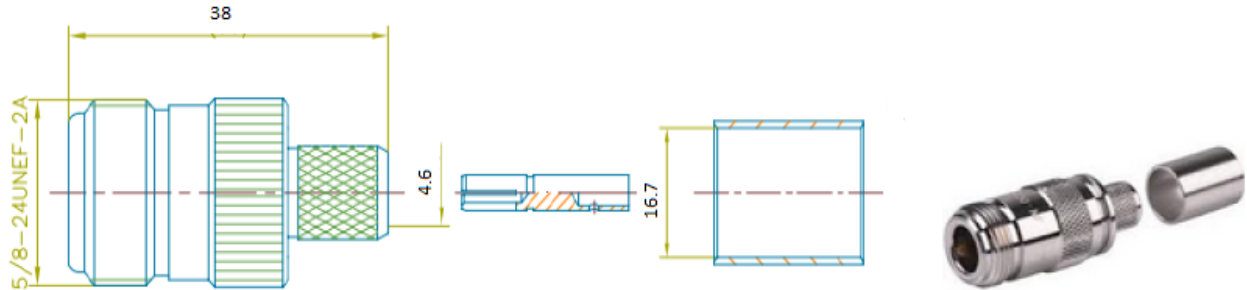

### Electrical:

Characteristic Impedance	50 ohm
Frequency Range	DC-6 GHz
VSWR	$\leq 1.15 @ DC-4 \text{ GHz}$
Dielectric Withstanding Voltage	$\geq 1000 \text{ V RMS}, 50 \text{ Hz}, \text{ at sea level}$
Dielectric Resistance	$\geq 5000 \text{ M}\Omega$
Contact Resistance	Center Contact $\leq 1 \text{ m}\Omega$ Outer Contact $\leq 0.25 \text{ m}\Omega$

### Mechanical:

Durability	Mating Cycles $\geq 500$
------------	--------------------------

### Material and Plating:

	Material	Plating
Body	Brass	Ni
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	Au

### Environmental:

Operating Temperature Range	$-40^\circ \text{C} \sim +85^\circ \text{C}$
RoHs	Compliant