


# Synergy Telecom P Ltd.

Synergy Telecom (P) Ltd Sy **SAA(F) 4-HOLE SOLDER:-** Telecom (P) Ltd Synergy Telecom (P) Ltd

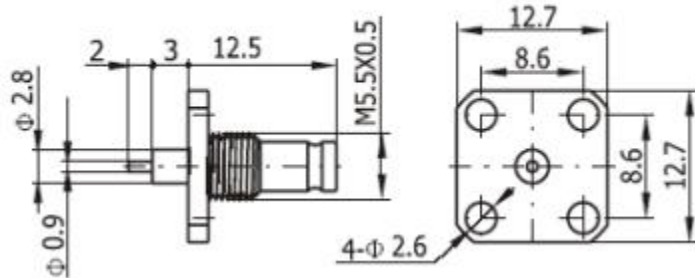

## Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC-3 GHz
VSWR	≤ 1.07(0~2.2G) ≤ 1.15(0~3G)
Dielectric strength	≥750V RMS, at sea level
Dielectric Resistance	≥ 5000 M Ω
Insertion Loss	≤ 0.08dB (@2200MHz)
Center Contact Resistance	≤ 0.006 Ω
Outer Contact Resistance	≤ 0.002 Ω
RoHS Compliance	Compliance

## Mechanical

Durability Mating cycle	≥500
Termination cable retention	≥300N

## Material Specification

Connector Parts	Material	Plating
Body	Brass	Gold
Outer Contact	Brass	CuSnZn
Center Contact	Brass	Au
Fastener	Brass	Ni
Dielectric	PTFE	-

## Environmental

Temperature Range	- 40°C – +85 °C
-------------------	-----------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India  
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,  
 E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>