


# Synergy Telecom P Ltd.

**SMA (M) R/A RG316/174/179/LMR100CRIMP (G/P)**

**Part No- ST02SMAMR1001006**

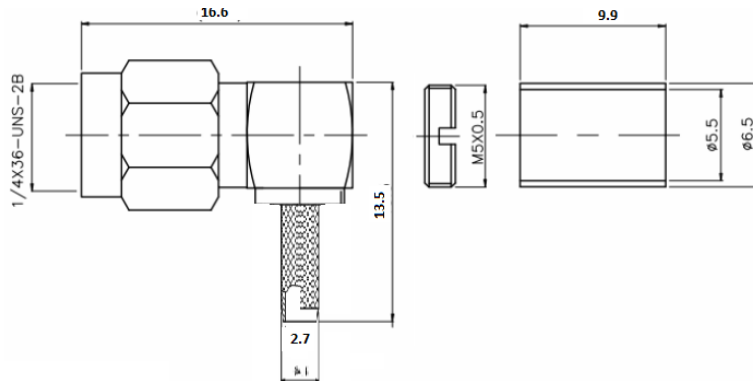

## **Electrical:**

Characteristic Impedance	50 ohm
Frequency Range	DC-6Ghz
VSWR	$\leq 1.15 @ DC-6GHz$
Dielectric Withstanding Voltage	$\geq 1000V$ RMS,50Hz,at sea level
Dielectric Resistance	$\geq 5000M\Omega$
Contact Resistance	Center Contact $\leq 3m\Omega$ Outer Contact $\leq 2.5m\Omega$

## **Mechanical:**

Durability	Mating Cycles $\geq 500$
------------	--------------------------

## **Material and Plating:**

	<b>Material</b>	<b>Plating</b>
Body	Brass	Au
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	Au

## **Environmental:**

Operating Temperature Range	-40°C ~ +85°C
RoHs	Compliant

**WZ-47 BUDHELLA VILLAGE, VIKASPURI, NEW DELHI – 110018**  
**PHONE: 011-28533349, MOB: 9810138894/9212558066, FAX: 011-28533349**  
**EMAIL: [info@rfconnector.in](mailto:info@rfconnector.in), WEBSITE: <http://rfconnector.in/>**