




Synergy Telecom P Ltd.

SMC(M) LMR-100 CRIMP G/P:-

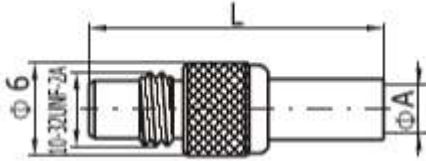

A=2.4mm



Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC-6 GHz
VSWR	$\leq 1.07(0\sim 2.2G)$ $\leq 1.15(0\sim 3G)$
Dielectric strength	$\geq 25000V$ RMS, at sea level
Dielectric Resistance	$\geq 5000 M \Omega$
Insertion Loss	$\leq 0.08dB$ (@2200MHz)
Center Contact Resistance	$\leq 1.0M \Omega$
Outer Contact Resistance	$\leq 0.25M \Omega$
RoHS	Compliance

Mechanical

Durability Mating cycle	≥ 500
Termination cable retention	$\geq 300N$

Material Specification

Connector Parts	Material	Plating
Body	Brass	Gold
Outer Contact	Brass	CuSnZn
Center Contact	Brass	Au
Fastener	Brass	Ni
Dielectric	PTFE	

Environmental

Temperature Range	-40°C ~ +85°C
--------------------------	---------------

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>