




Synergy Telecom P Ltd.

SMZ Male Bulk Head BT 3002 Cable:-

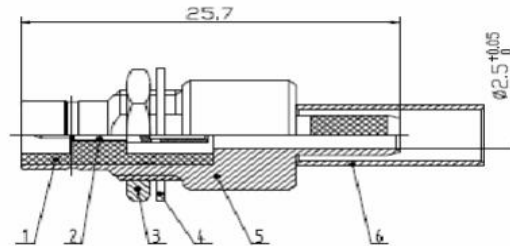

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC-3 GHz
VSWR	≤ 1.07(0~2.2G) ≤ 1.15(0~3G)
Dielectric strength	≥25000V RMS, at sea level
Dielectric Resistance	≥ 5000 M Ω
Insertion Loss	≤ 0.08dB (@2200MHz)
Center Contact Resistance	≤ 1.0M Ω
Outer Contact Resistance	≤ 0.25MΩ
RoHS	Compliance

Mechanical

Durability Mating cycle	≥500
Termination cable retention	≥300N

Material Specification

Connector Parts	Material	Plating
Body	Brass	Gold
Outer Contact	Brass	CuSnZn
Center Contact	Brass	Au
Fastener	Brass	Ni
Dielectric	PTFE	-

Environmental

Temperature Range	- 40°C – +85 °C
--------------------------	-----------------

13-15 RPS flats, E-block, VIKASPURI, N DELHI-110018, INDIA
 Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
 E-mail : pradeep@rfconnectorhouse.com, Website : http://www.rfconnector.info/