


Synergy Telecom P Ltd.

TNC Male for 1-2 Feeder Cable

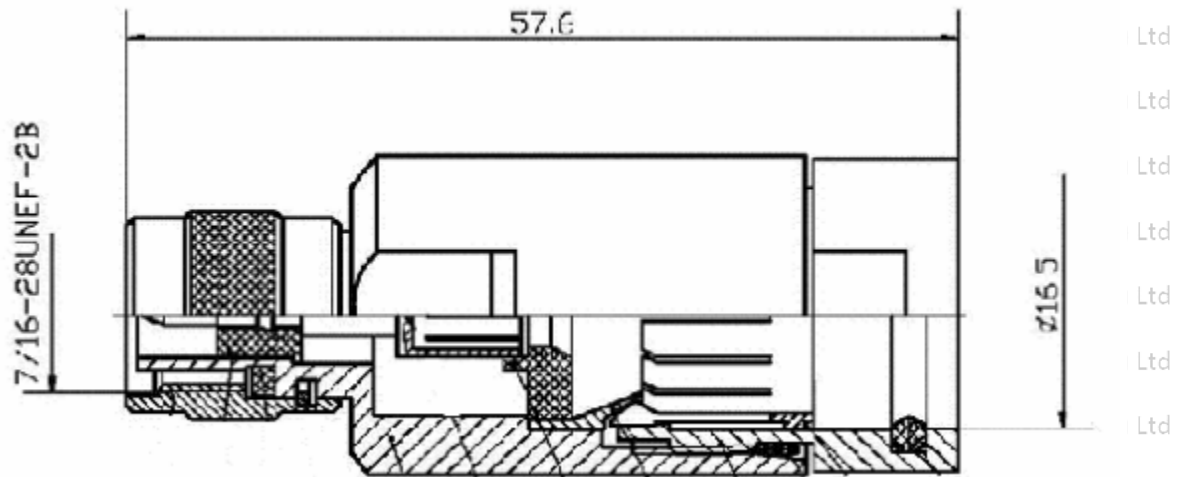

Electrical Specification

Characteristic Impedance	50 ohm
Frequency Range	DC- 3 GHz
VSWR	$\leq 1.10(0\sim 2.2G)$ $\leq 1.15(0\sim 3G)$
Dielectric strength	$\geq 2500V$ RMS, at sea level
Dielectric Resistance	$\geq 5000 M.\Omega$
Insertion Loss	$\leq 0.08dB$ (@2200MHz)
Center Contact Resistance	$\leq 1.0 m\Omega$
Center Contact Resistance	$\leq 0.25 m\Omega$
RoHS	Compliance

Mechanical

Durability Mating cycle	≥ 500
Termination cable retention	$\geq 300N$

Material Specification

Connector Parts	Material	Plating
Outer Contact	Brass	CuSnZn
Center Contact	Brass	Au
Fastener	Brass	Ni
Dielectric	PTFE	

