



**Micro-Stirp 4X4 Port Hybrid Coupler
(800-2500MHz)N-F**

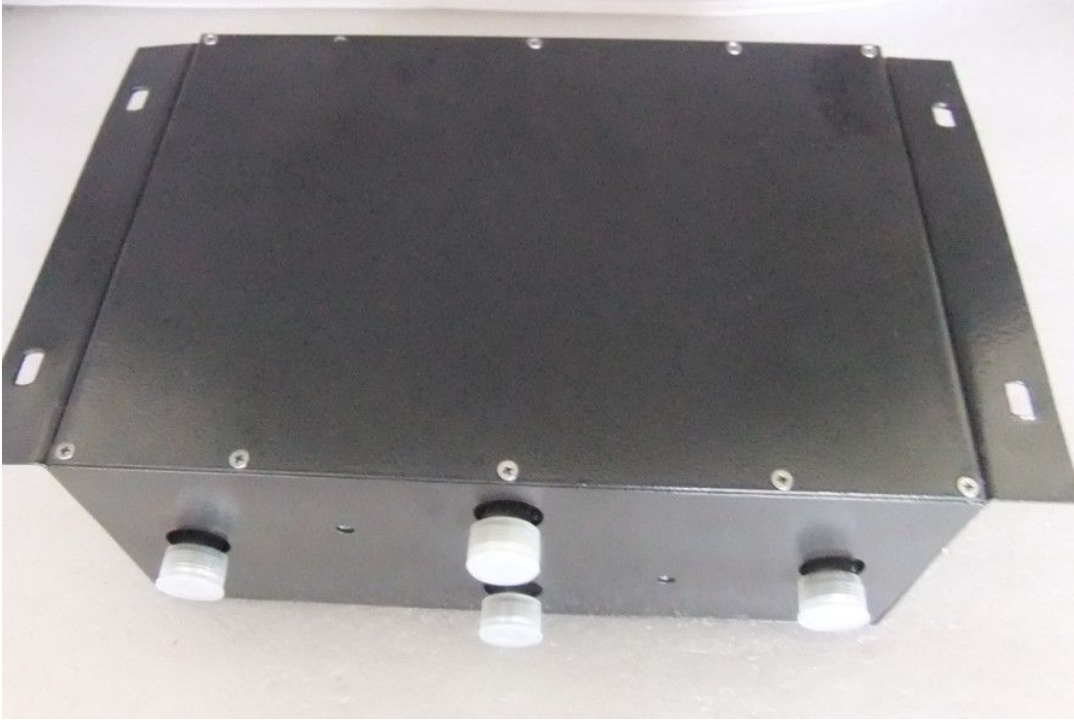

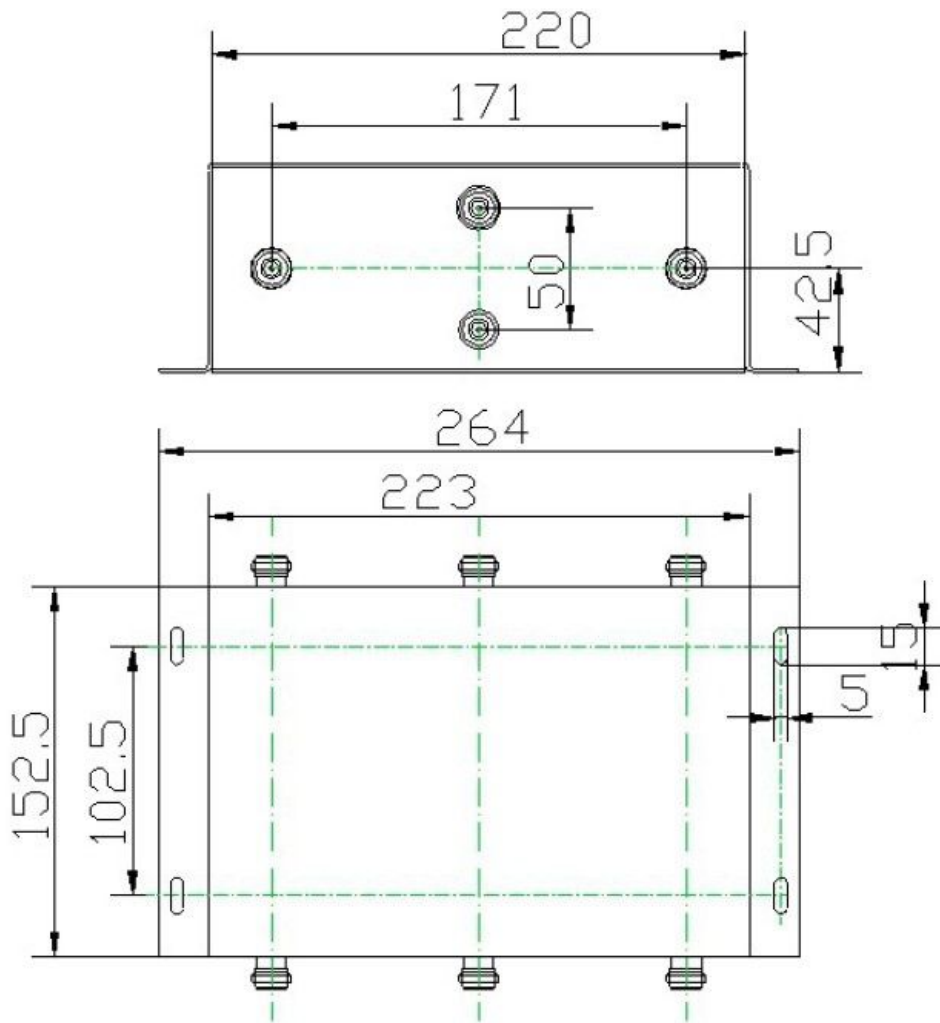

Model	- MSHC-825-NF
Frequency(MHz)	800--2500MHz
Insertion Loss(dB)	≦ 7.0
Isolation(dB)	≧ 19
VSWR	≦ 1.3:1
Power Capacity(W)	200
Impedance(ohm)	50
RF Connector	N-female
Operating Temperature(deg)	-35~+70
Color	Black-plated
IP Grade	IP65
Relative Humidity	5%-95%
Weight(kg)	1.145